

Clone Detection & Management

für Architekten



Dr. Elmar Jürgens



A photograph of a man with a beard and a receding hairline, wearing a striped shirt and a black lanyard. He is smiling and holding a small white card in his hands. The background is a plain wall.


#1 Code Smell (1999)

```
// Utilities for arrays of elements
public String showElements(ModelElement[] elements, String nomsg) {
    boolean found = false;
    StringBuffer res = new StringBuffer();
    if (elements != null) {
        Index.getInstance().setCurrentRenderer(
            FlatReferenceRenderer.getInstance());
        for (int i = 0; i < elements.length; i++) {
            ModelElement el = elements[i];
            res.append(showElementLink(el)).append(HTML.LINE_BREAK);
            found = true;
        }
        Index.getInstance().resetCurrentRenderer();
    }
    if (!found && nomsg != null && nomsg.length() > 0) {
        res.append(HTML.italics(nomsg));
    }
    return res.toString();
}


// Utilities for arrays of elements
public String showElements(ModelElement[] elements, String nomsg) {
    boolean found = false;
    StringBuffer res = new StringBuffer();
    if (elements != null) {
        Index.getInstance().setCurrentRenderer(
            FlatReferenceRenderer.getInstance());
        for (int i = 0; i < elements.length; i++) {
            ModelElement el = elements[i];
            res.append(showElementLink(el)).append(HTML.LINE_BREAK);
            found = true;
        }
        Index.getInstance().resetCurrentRenderer();
    }
    if (!found && nomsg.length() > 0) {
        res.append(HTML.italics(nomsg));
    }
    return res.toString();
}
```


```
// Utilities for arrays of elements
public String showElements(ModelElement[] elements, String nomsg) {
    boolean found = false;
    StringBuffer res = new StringBuffer();
    if (elements != null) {
        Index.getInstance().setCurrentRenderer(
            FlatReferenceRenderer.getInstance());
        for (int i = 0; i < elements.length; i++) {
            ModelElement el = elements[i];
            res.append(showElementLink(el)).append(HTML.LINE_BREAK);
            found = true;
        }
        Index.getInstance().resetCurrentRenderer();
    }
    if (!found && nomsg != null && nomsg.length() > 0) {
        res.append(HTML.italics(nomsg));
    }
    return res.toString();
}
```



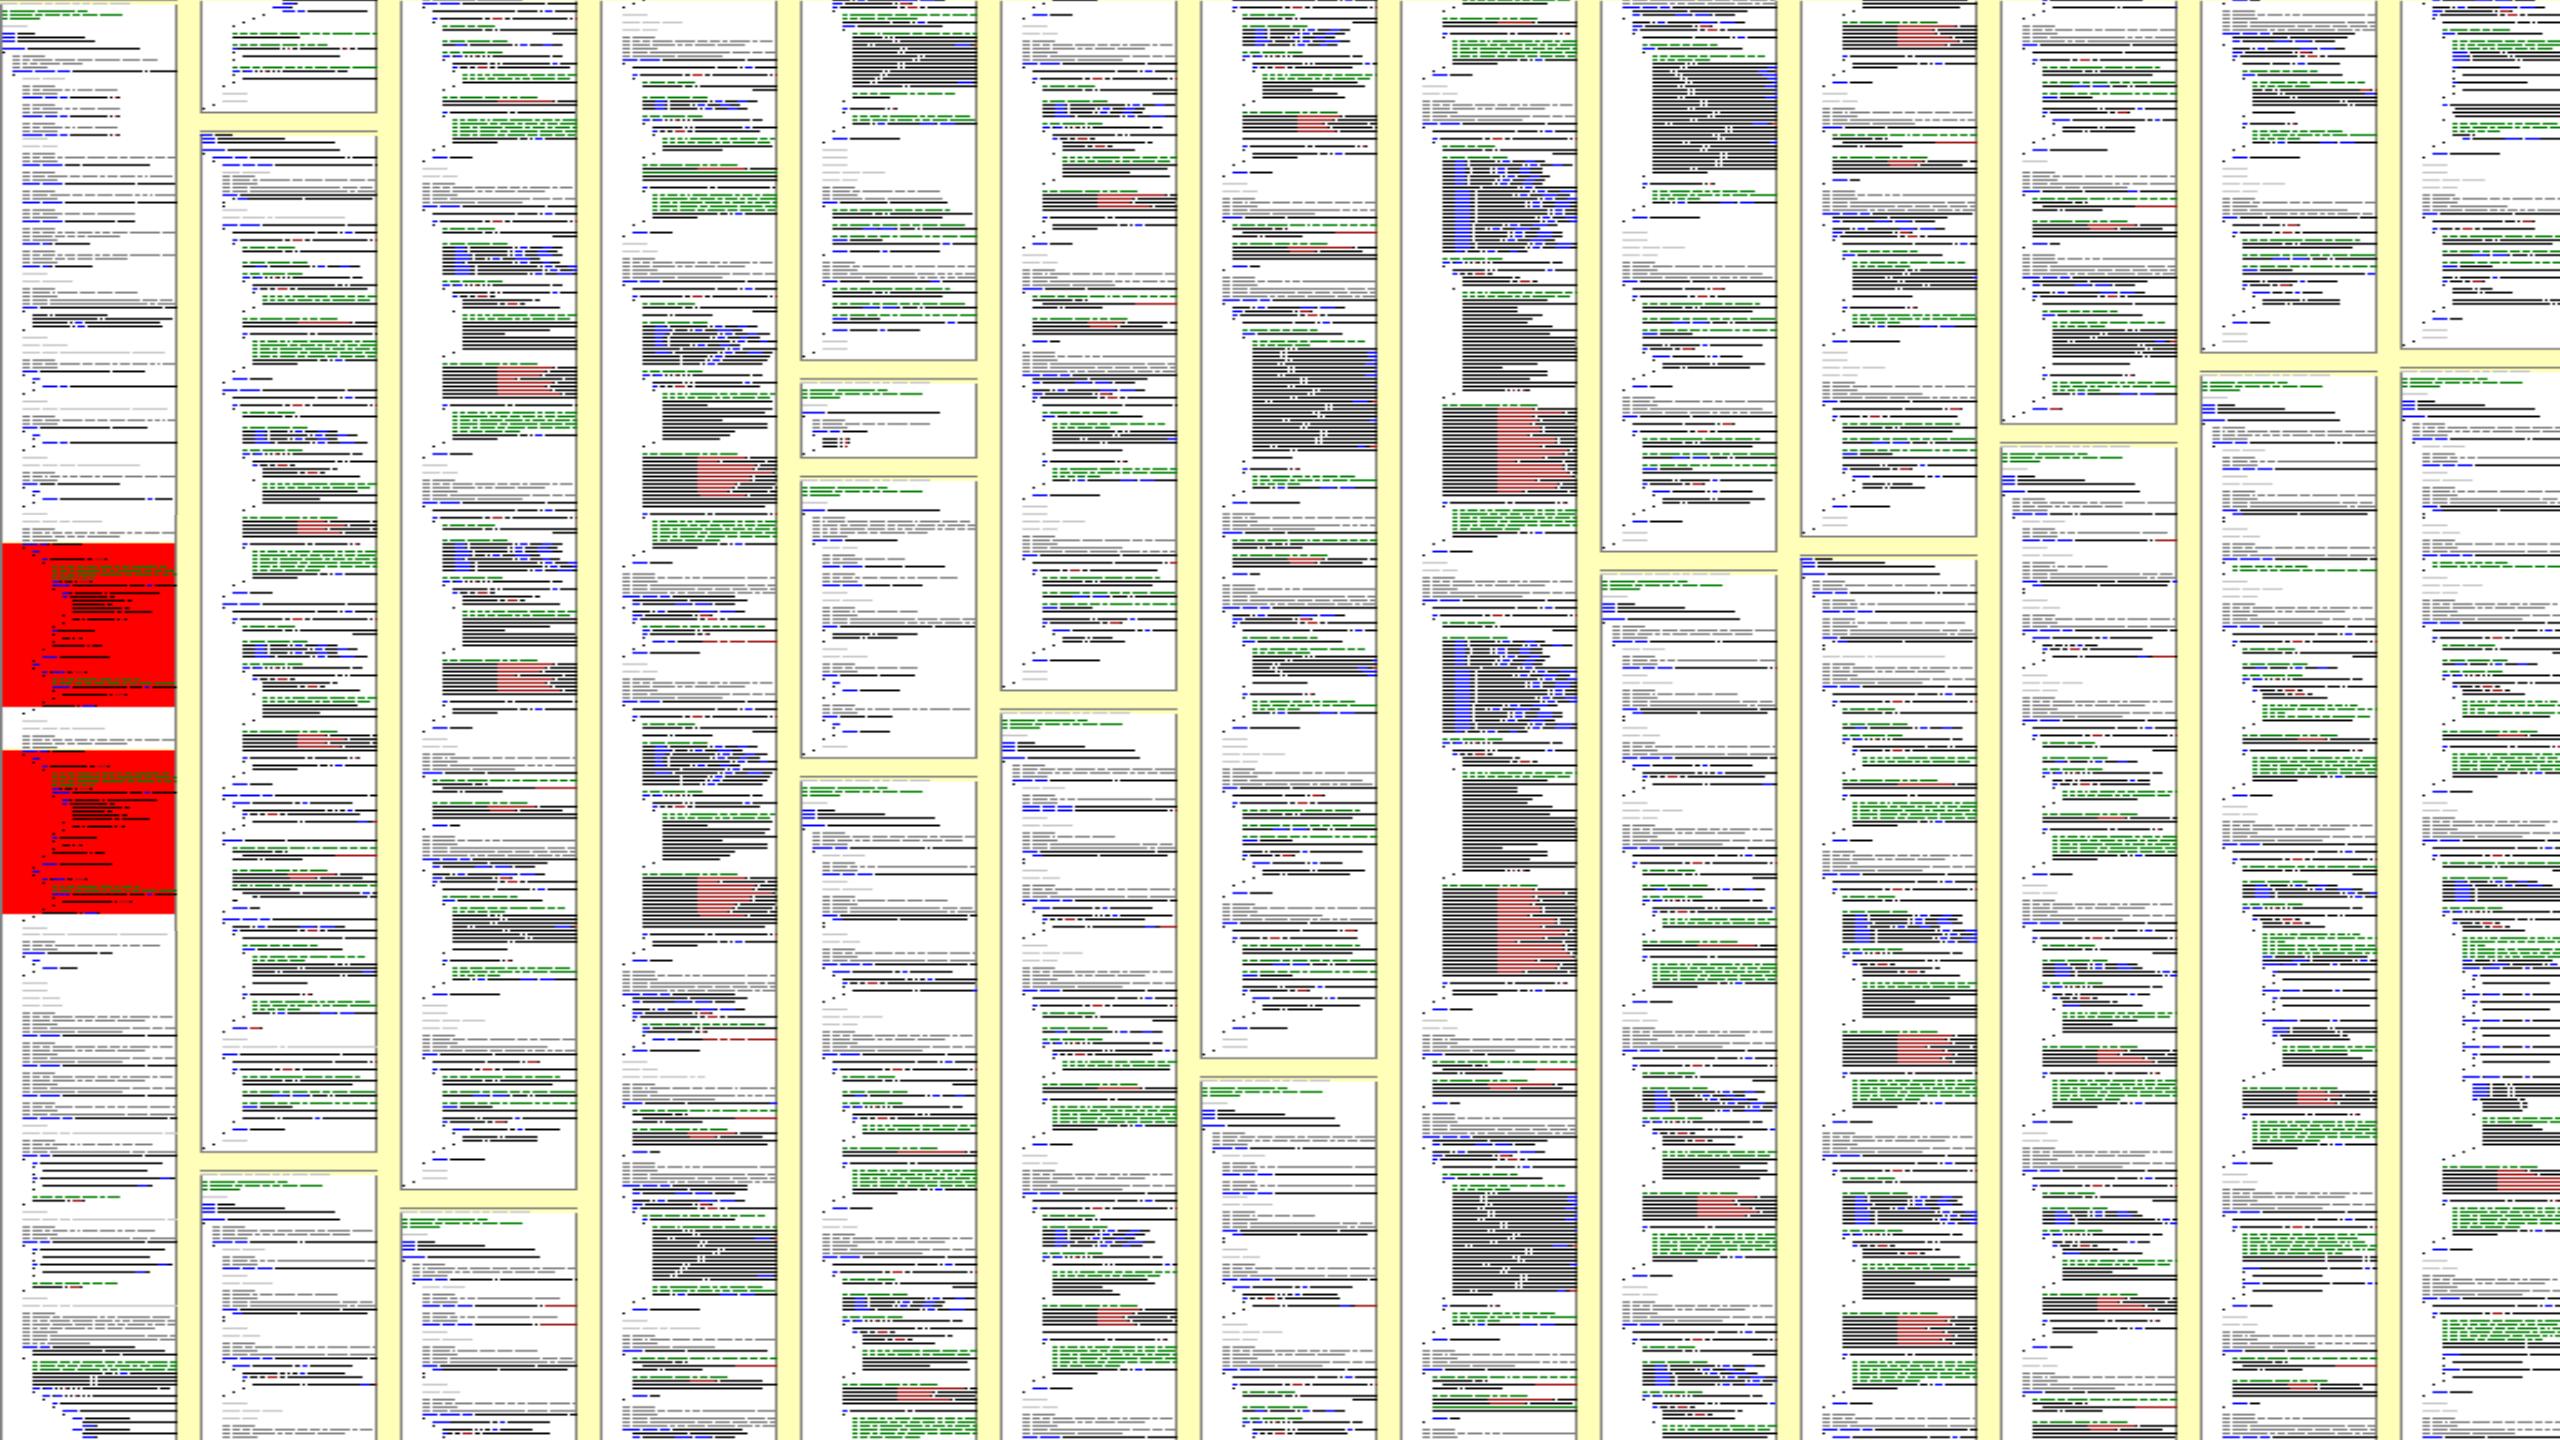



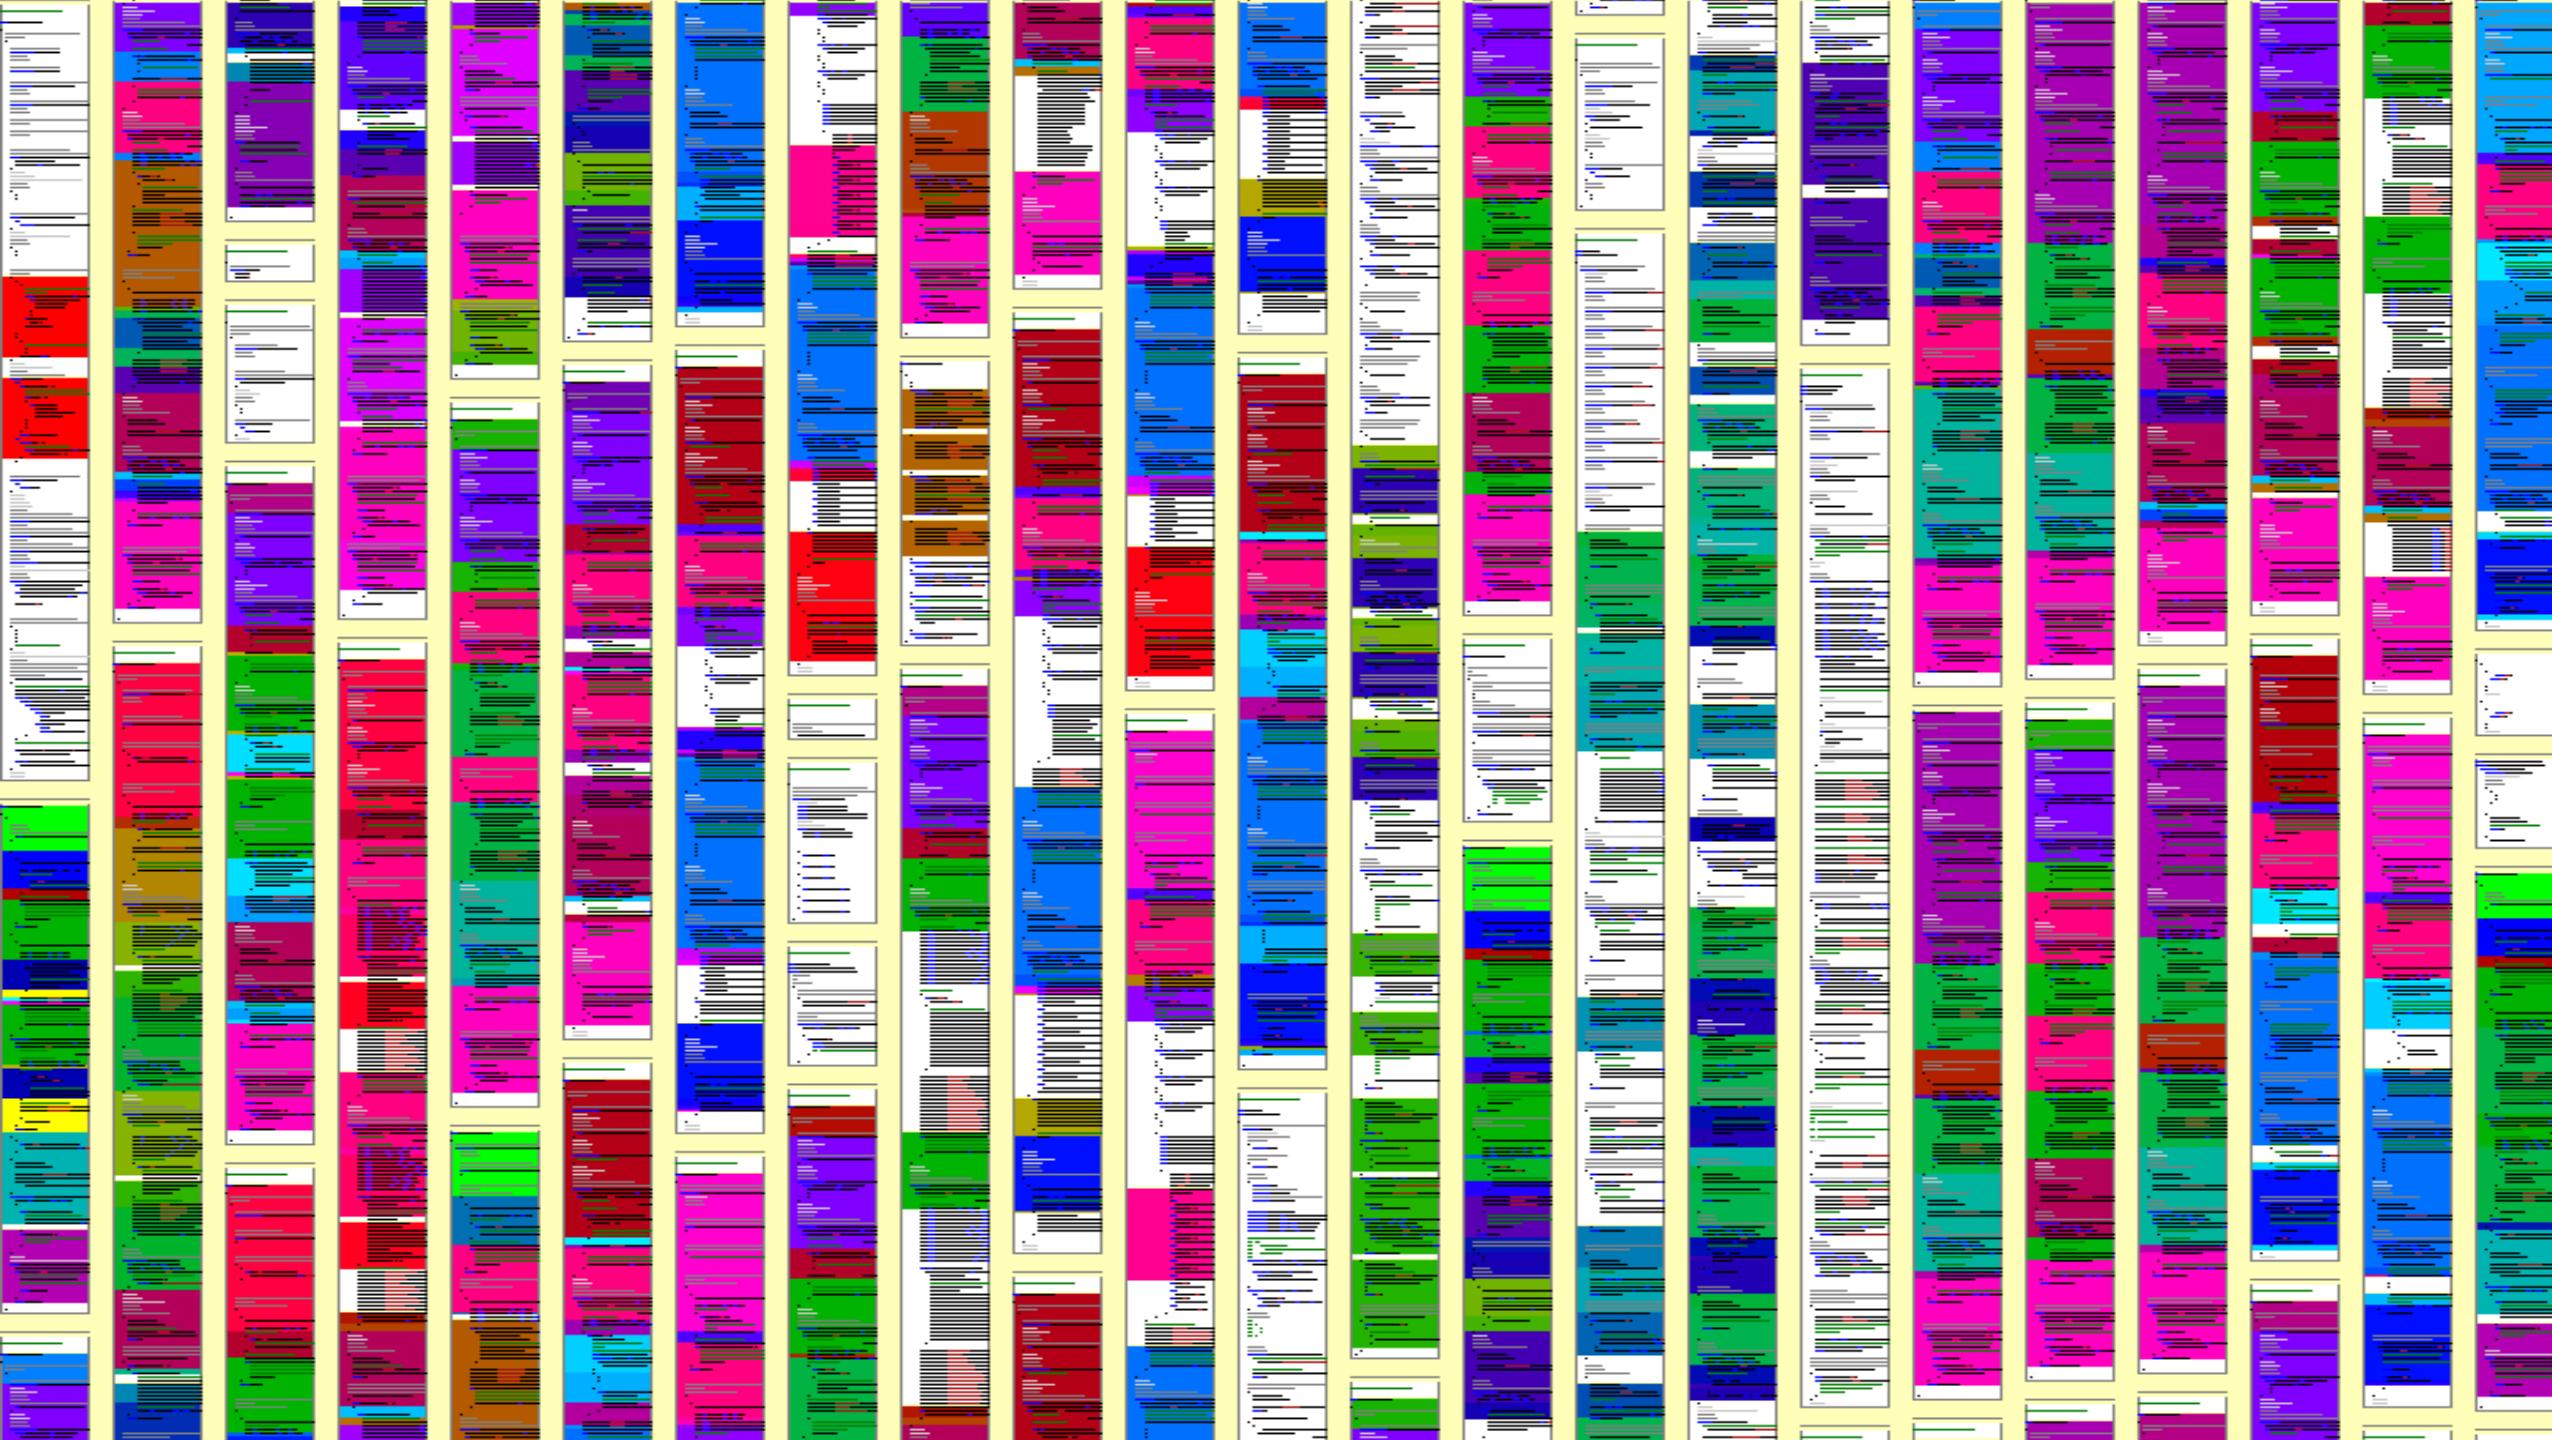

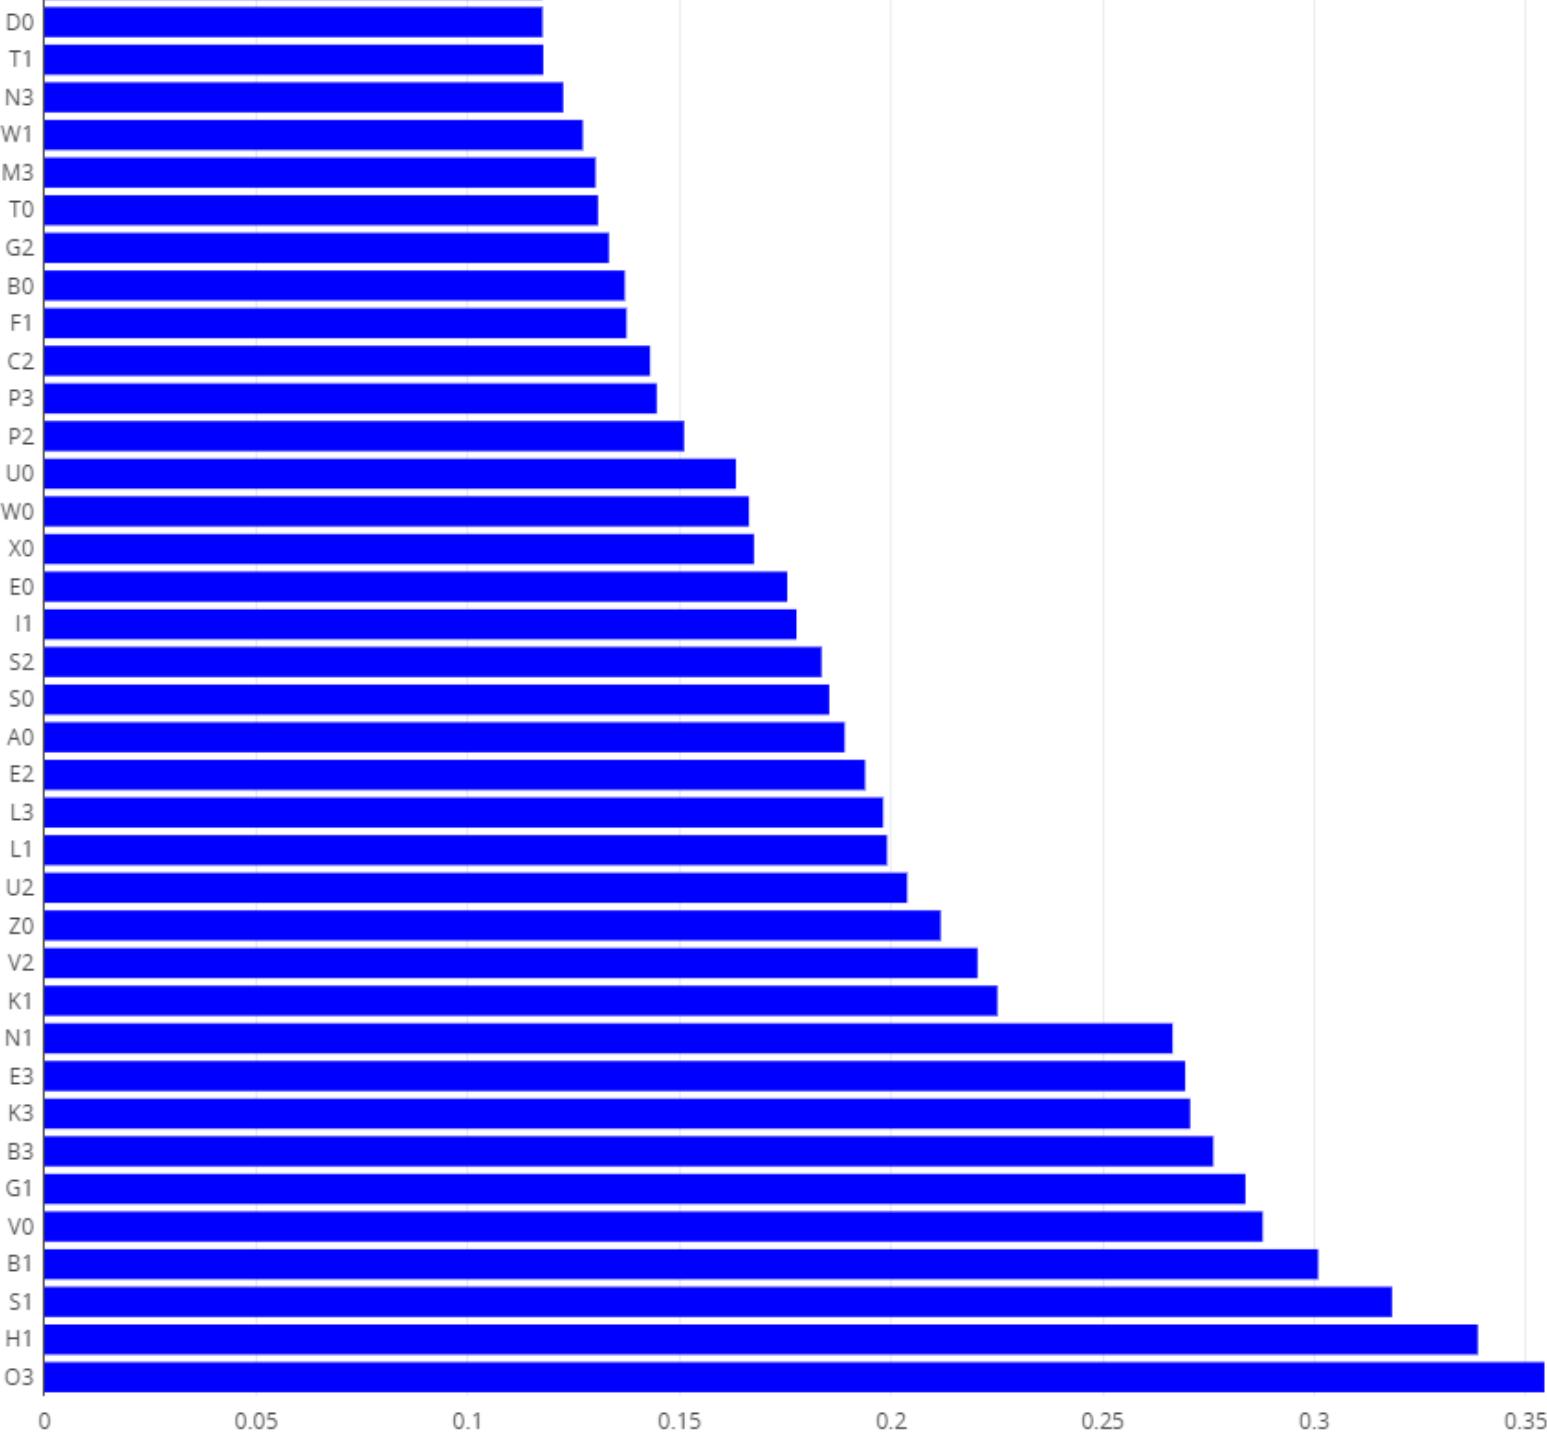





TUM




CQSE



Wie funktioniert
Clone Detection?

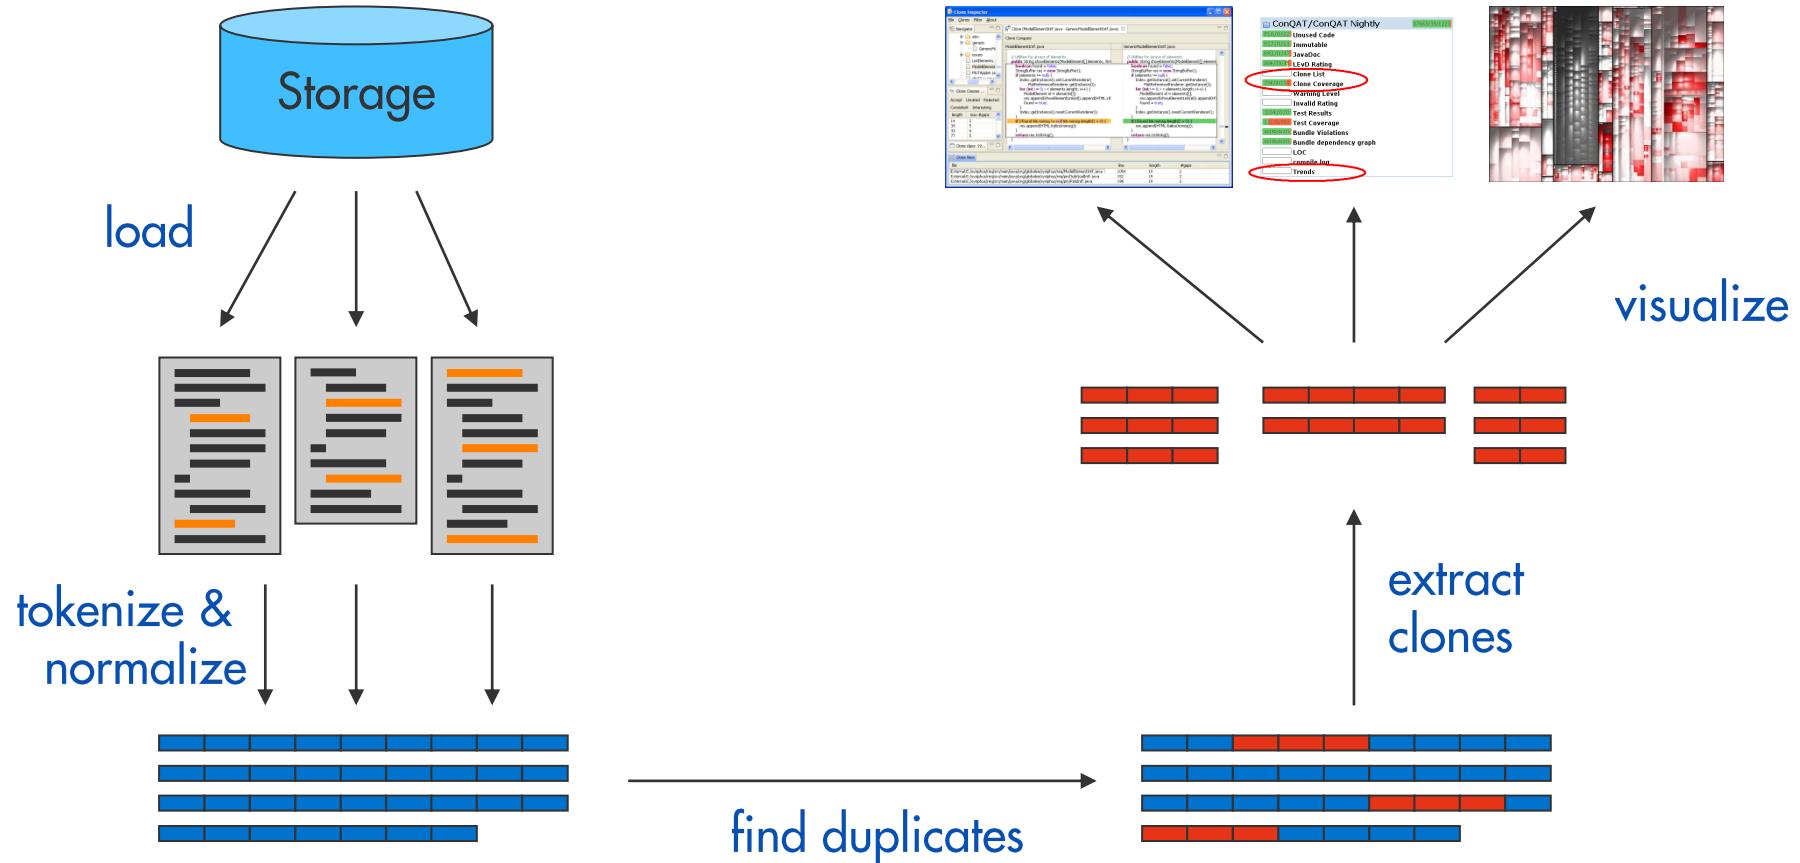

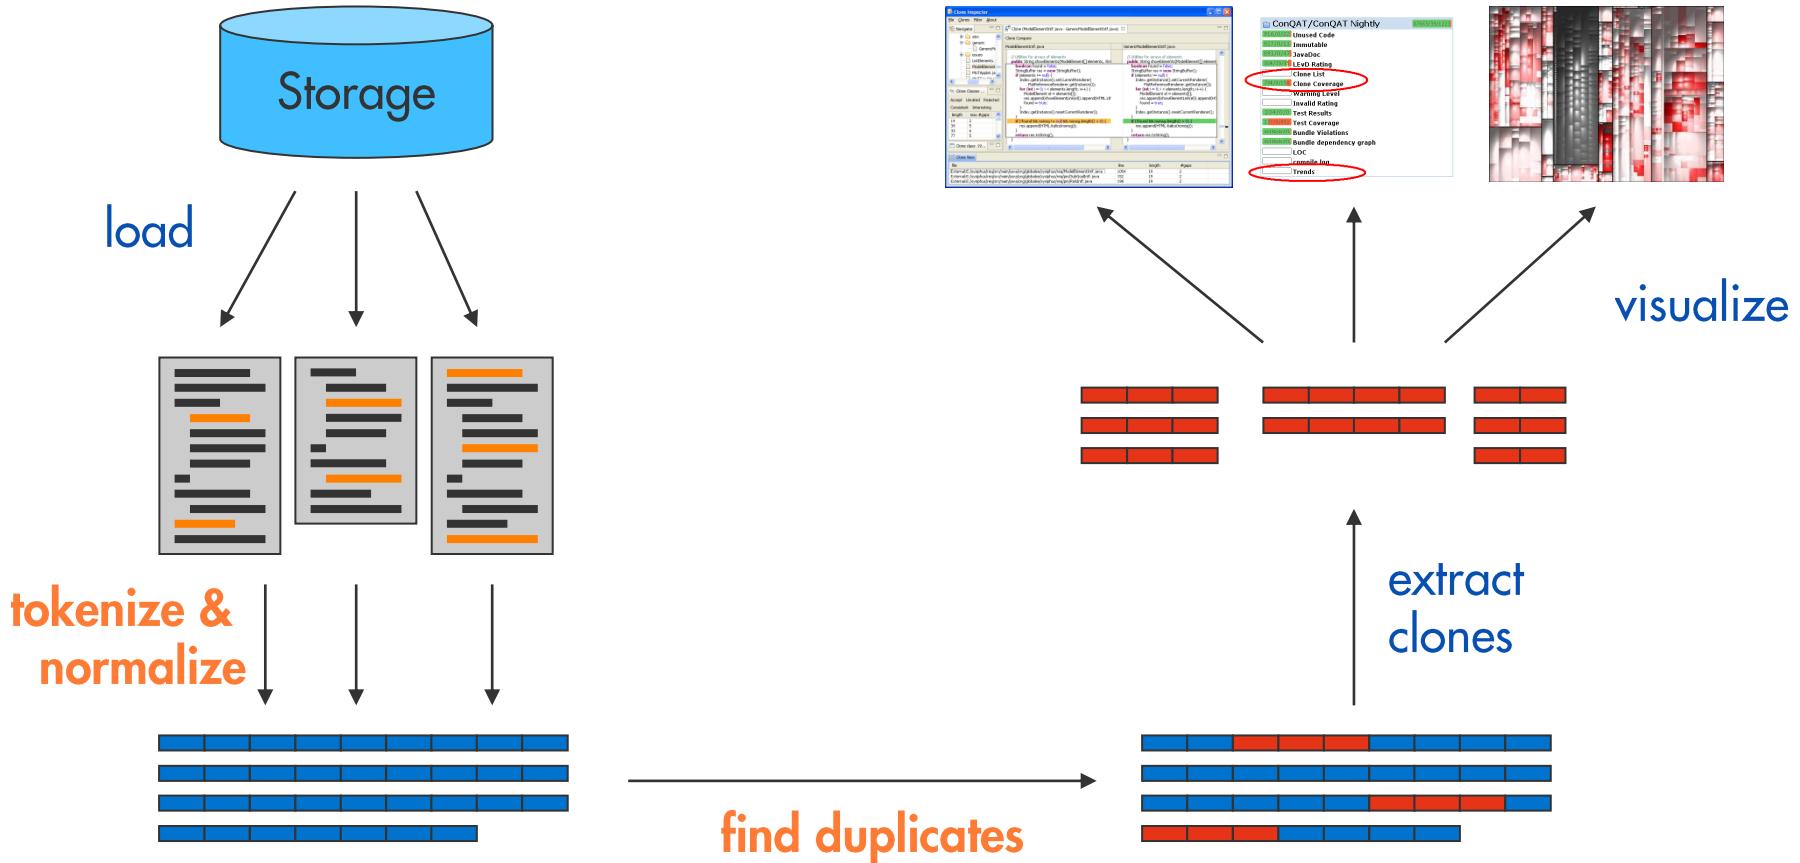

Normalisierung

```
String readFileUtf8(File file) {  
    FileInputStream in = new FileInputStream(file);  
    byte[] buffer = new byte[file.length()];  
    in.read(buffer); in.close();  
    return new String(buffer, „UTF-8”);  
}  
  
String readFileUtf16(File file) {  
    FileInputStream in = new FileInputStream(file);  
    byte[] buffer = new byte[file.length()];  
    in.read(buffer); in.close();  
    return new String(buffer, „UTF-16”);  
}  
  
id0 id1(id2 id3) {  
    id0 id2 = new id0(id4);  
    id0[] id1 = new id0[id2.id3()];  
    id0.id1(id2); id0.id3();  
    return new id0(id1, lit0);  
}  
  
id0 id1(id2 id3) {  
    id0 id2 = new id0(id4);  
    id0[] id1 = new id0[id2.id3()];  
    id0.id1(id2); id0.id3();  
    return new id0(id1, lit0);  
}
```

Normalisierung

```
String readFileUtf8(File file) {  
    FileInputStream in = new FileInputStream(file);  
    byte[] buffer = new byte[file.length()];  
    in.read(buffer); in.close();  
    return new String(buffer, „UTF-8”);  
}
```

```
String readFileUtf16(File file) {  
    FileInputStream in = new FileInputStream(file);  
    byte[] buffer = new byte[file.length()];  
    in.read(buffer); in.close();  
    return new String(buffer, „UTF-16”);  
}
```

```
id0 id1(id2 id3) {  
    id0 id2 = new id0(id4);  
    id0[] id1 = new id0[id2.id3()];  
    id0.id1(id2); id0.id3();  
    return new id0(id1, lit0);  
}
```

```
id0 id1(id2 id3) {  
    id0 id2 = new id0(id4);  
    id0[] id1 = new id0[id2.id3()];  
    id0.id1(id2); id0.id3();  
    return new id0(id1, lit0);  
}
```

BusinessRuleTaskXMLConverter.java DefinitionsParser.java

```

model.setTargetNamespace(xtr.getAttributeValue(null, TARGET_NAMESPACE_ATTRIBUTE));
for (int i = 0; i < xtr.getNamespaceCount(); i++) {
    String prefix = xtr.getNamespacePrefix(i);
    if (StringUtils.isNotEmpty(prefix)) {
        model.addNamespace(prefix, xtr.getNamespaceURI(i));
    }
}

for (int i = 0; i < xtr.getAttributeCount(); i++) {
    ExtensionAttribute extensionAttribute = new ExtensionAt
extensionAttribute.setName(xtr.getAttributeLocalName(i));
extensionAttribute.setValue(xtr.getAttributeValue(i));
if (StringUtils.isNotEmpty(xtr.getAttributeNamespace(i)))
    extensionAttribute.setNamespace(xtr.getAttributeNames
}
if (StringUtils.isNotEmpty(xtr.getAttributePrefix(i)))
    extensionAttribute.setNamespacePrefix(xtr.getAttribute
}
if (!BpmnXMLUtil.isBlacklisted(extensionAttribute, defa
    model.addAttribute(extensionAttribute);
}

```

Clone with 2 instances of length 10

Problems @ Javadoc Declaration Findings Orphans View

Description	Group
Clone with 2 instances of length 10	Code Duplica...
Interface comment missing	Documentatio...
Interface comment missing	Documentatio...
Name violates naming convention: defaultAttributes. Should be	Naming

Jenkins/test/src/main/java/org/jvnet/hudson/test/HudsonTestCase.java (revision 12d96a56...)

```

if (lhs==null && rhs==null) return;
if (lhs==null) fail("lhs is null while rhs="+rhs);
if (rhs==null) fail("rhs is null while lhs="+lhs);

Constructor<?> lc = findDataBoundConstructor(lhs.getClass());
Constructor<?> rc = findDataBoundConstructor(rhs.getClass());
assertEquals("Data bound constructor mismatch. Different type?", lc, rc);

List<String> primitiveProperties = new ArrayList<String>();

String[] names = ClassDescriptor.loadParameterNames(lc);
Class<?[]> types = lc.getParameterTypes();
assertEquals(names.length, types.length);
for (int i=0; i<types.length; i++) {
    Object lv = ReflectionUtils.getPublicProperty(lhs, names[i]);
    Object rv = ReflectionUtils.getPublicProperty(rhs, names[i]);

    if (Iterable.class.isAssignableFrom(types[i])) {
        Iterable lcol = (Iterable) lv;
        Iterable rcol = (Iterable) rv;
        Iterator ltr, rtr;
        for (ltr=lcol.iterator(), rtr=rcol.iterator(); ltr.hasNext() && rtr.hasNext();)
            Object litem = ltr.next();
            Object ritem = rtr.next();

            if (findDataBoundConstructor(litem.getClass())!=null)
                assertEqualsDataBoundBeans(litem, ritem);
            } else {
                assertEquals(litem, ritem);
            }
        }
        assertFalse("collection size mismatch between "+lhs+ " and "+rhs, ltr.hasNext() ^ rtr.hasNext());
    } else
        if (findDataBoundConstructor(types[i])!=null || (lv!=null && findDataBoundConstructo
            // recurse into nested databound objects
            assertEqualsDataBoundBeans(lv, rv);
        } else {
            primitiveProperties.add(names[i]);
        }
}

// compare shallow primitive properties
if (!primitiveProperties.isEmpty())
    assertEqualsBeans(lhs, rhs, Util.join(primitiveProperties, ","));

*
* Makes sure that two collections are identical via {@link #assertEqualsDataBoundBeans(Objec
/
```

Jenkins/test/src/main/java/org/jvnet/hudson/test/JenkinsRule.java

```

if (lhs==null && rhs==null) return;
if (lhs==null) fail("lhs is null while rhs="+rhs);
if (rhs==null) fail("rhs is null while lhs="+lhs);

Constructor<?> lc = findDataBoundConstructor(lhs.getClass());
Constructor<?> rc = findDataBoundConstructor(rhs.getClass());
assertThat("Data bound constructor mismatch. Different type?", lc, rc);

List<String> primitiveProperties = new ArrayList<String>();


String[] names = ClassDescriptor.loadParameterNames(lc);
Class<?[]> types = lc.getParameterTypes();
assertThat(types.length, is(names.length));
for (int i=0; i<types.length; i++) {
    Object lv = ReflectionUtils.getPublicProperty(lhs, names[i]);
    Object rv = ReflectionUtils.getPublicProperty(rhs, names[i]);

    if (lv != null && rv != null && Iterable.class.isAss
        Iterable lcol = (Iterable) lv;
        Iterable rcol = (Iterable) rv;
        Iterator ltr, rtr;
        for (ltr=lcol.iterator(), rtr=rcol.iterator(); ltr.hasNext() && rtr.hasNext();)
            Object litem = ltr.next();
            Object ritem = rtr.next();

            if (findDataBoundConstructor(litem.getClass())!=null)
                assertEqualsDataBoundBeans(litem, ritem);
            } else {
                assertEquals(litem, ritem);
            }
        }
        assertThat("collection size mismatch between "+lhs+ " and "+rhs, ltr.hasNext() ^ rtr.hasNext());
    } else
        if (findDataBoundConstructor(types[i])!=null || (lv!=null && findDataBoundConstructo
            // recurse into nested databound objects
            assertEqualsDataBoundBeans(lv, rv);
        } else {
            primitiveProperties.add(names[i]);
        }
}

// compare shallow primitive properties
if (!primitiveProperties.isEmpty())
    assertEqualsBeans(lhs, rhs, Util.join(primitiveProperties, ","));

*
* Makes sure that two collections are identical via {@link #assertEqualsDataBoundBeans(Objec
/
```

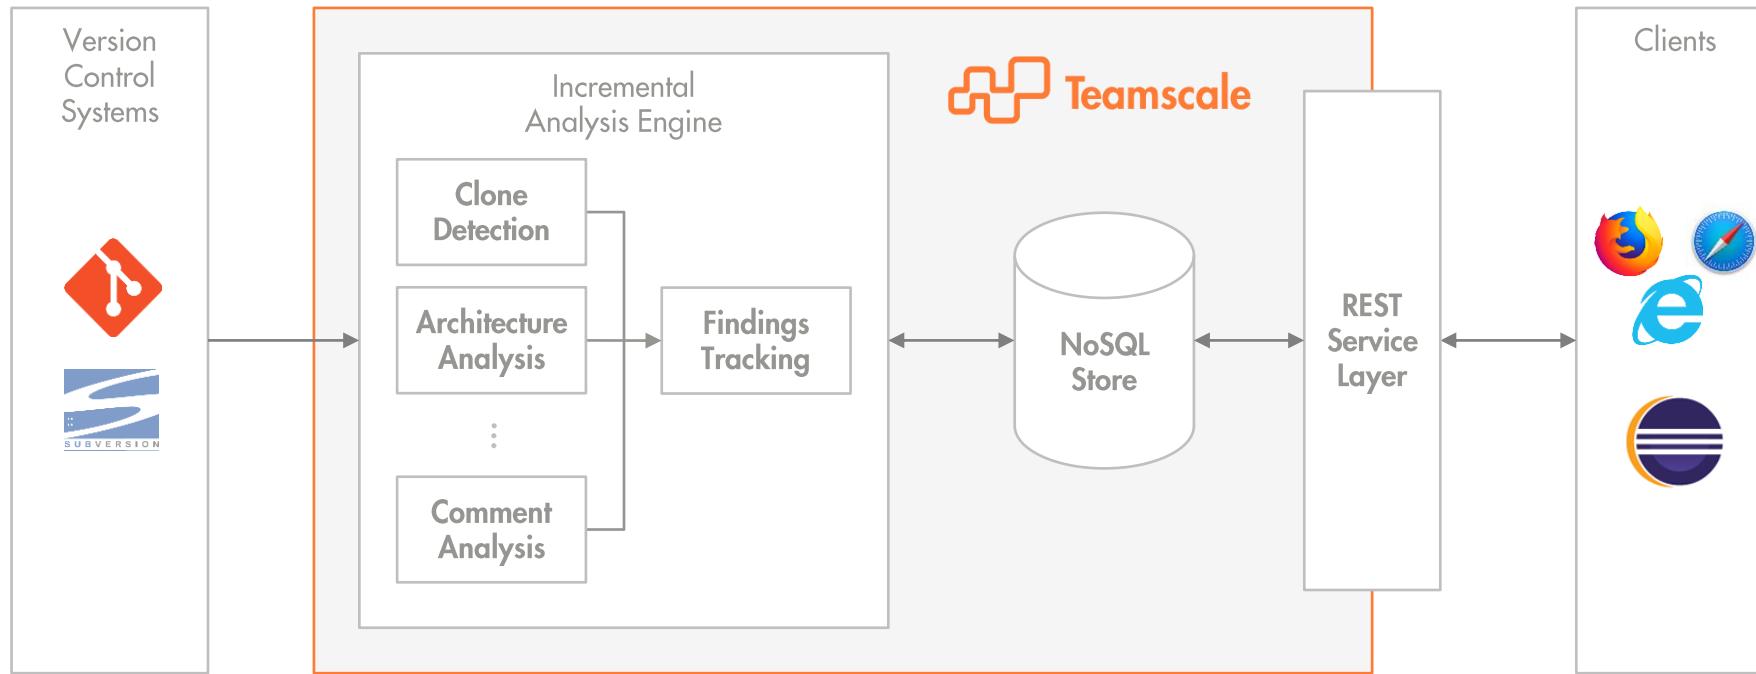

Sind Clones ein Problem
für die Weiterentwicklung?

```
// Utilities for arrays of elements
public String showElements(ModelElement[] elements, String nomsg) {
    boolean found = false;
    StringBuffer res = new StringBuffer();
    if (elements != null) {
        Index.getInstance().setCurrentRenderer(
            FlatReferenceRenderer.getInstance());
        for (int i = 0; i < elements.length; i++) {
            ModelElement el = elements[i];
            res.append(showElementLink(el)).append(HTML.LINE_BREAK);
            found = true;
        }
        Index.getInstance().resetCurrentRenderer();
    }
    if (!found && nomsg != null && nomsg.length() > 0) {
        res.append(HTML.italics(nomsg));
    }
    return res.toString();
}
```

```
// Utilities for arrays of elements
public String showElements(ModelElement[] elements, String nomsg) {
    boolean found = false;
    StringBuffer res = new StringBuffer();
    if (elements != null) {
        Index.getInstance().setCurrentRenderer(
            FlatReferenceRenderer.getInstance());
        for (int i = 0; i < elements.length; i++) {
            ModelElement el = elements[i];
            res.append(showElementLink(el)).append(HTML.LINE_BREAK);
            found = true;
        }
        Index.getInstance().resetCurrentRenderer();
    }
    if (!found && nomsg.length() > 0) {
        res.append(HTML.italics(nomsg));
    }
    return res.toString();
}
```

- Dashboard
- Activity
- Findings
- Metrics
- Tests
- Issues
- Tasks
- Architecture
- Delta
- Projects
- System
- # Admin

jenkins/test/src/main/java/org/jvnet/hudson/test/HudsonTestCase.java

(revision 12d96a56...)

```
if (lhs==null && rhs==null)      return;
if (lhs==null)      fail("lhs is null while rhs="+rhs);
if (rhs==null)      fail("rhs is null while lhs="+lhs);

Constructor<?> lc = findDataBoundConstructor(lhs.getClass());
Constructor<?> rc = findDataBoundConstructor(rhs.getClass());
assertEquals("Data bound constructor mismatch. Different type?",lc,rc);

List<String> primitiveProperties = new ArrayList<String>();

String[] names = ClassDescriptor.loadParameterNames(lc);
Class<?>[] types = lc.getParameterTypes();
assertEquals(names.length,types.length);
for (int i=0; i<types.length; i++) {
    Object lv = ReflectionUtils.getPublicProperty(lhs, names[i]);
    Object rv = ReflectionUtils.getPublicProperty(rhs, names[i]);

    if (Iterable.class.isAssignableFrom(types[i])) {
        Iterable lcol = (Iterable) lv;
        Iterable rcol = (Iterable) rv;
        Iterator ltr,rtr;
        for (ltr=lcol.iterator(), rtr=rcol.iterator(); ltr.hasNext() && rtr.hasNext();)
            Object litem = ltr.next();
            Object ritem = rtr.next();

            if (findDataBoundConstructor(litem.getClass())!=null) {
                assertEqualsDataBoundBeans(litem,ritem);
            } else {
                assertEquals(litem,ritem);
            }
        }
        assertFalse("collection size mismatch between "+lhs+" and "+rhs, ltr.hasNext() ^ 
    } else
        if (findDataBoundConstructor(types[i])!=null || (lv!=null && findDataBoundConstructo
            // recurse into nested databound objects
            assertEqualsDataBoundBeans(lv,rv);
        } else {
            primitiveProperties.add(names[i]);
        }
    }

// compare shallow primitive properties
if (!primitiveProperties.isEmpty())
    assertEqualsBeans(lhs,rhs,Util.join(primitiveProperties,","));

*
    Makes sure that two collections are identical via {@link #assertEqualDataBoundBeans(Objec
/
public void assertEqualDataBoundBeans(List<?> lhs, List<?> rhs) throws Exception {
    assertEquals(lhs.size(), rhs.size());
    for (int i=0; i<lhs.size(); i++)
        assertEquals(lhs.get(i), rhs.get(i));
}
```

jenkins/test/src/main/java/org/jvnet/hudson/test/JenkinsRule.java

(revi...)

```
if (lhs==null && rhs==null)      return;
if (lhs==null)      fail("lhs is null while rhs="+rhs);
if (rhs==null)      fail("rhs is null while lhs="+lhs);

Constructor<?> lc = findDataBoundConstructor(lhs.getClass());
Constructor<?> rc = findDataBoundConstructor(rhs.getClass());
assertThat("Data bound constructor mismatch. Different type?", (Constructor)rc, is((Cons

List<String> primitiveProperties = new ArrayList<String>();

String[] names = ClassDescriptor.loadParameterNames(lc);
Class<?>[] types = lc.getParameterTypes();
assertThat(types.length, is(names.length));
for (int i=0; i<types.length; i++) {
    Object lv = ReflectionUtils.getPublicProperty(lhs, names[i]);
    Object rv = ReflectionUtils.getPublicProperty(rhs, names[i]);

    if (lv != null && rv != null && Iterable.class.isAssignableFrom(types[i])) {
        Iterable lcol = (Iterable) lv;
        Iterable rcol = (Iterable) rv;
        Iterator ltr,rtr;
        for (ltr=lcol.iterator(), rtr=rcol.iterator(); ltr.hasNext() && rtr.hasNext();)
            Object litem = ltr.next();
            Object ritem = rtr.next();

            if (findDataBoundConstructor(litem.getClass())!=null) {
                assertEqualsDataBoundBeans(litem,ritem);
            } else {
                assertThat(ritem, is(litem));
            }
        }
        assertThat("collection size mismatch between " + lhs + " and " + rhs, ltr.hasNext()
            is(false));
    } else
        if (findDataBoundConstructor(types[i])!=null || (lv!=null && findDataBoundConstructo
            // recurse into nested databound objects
            assertEqualsDataBoundBeans(lv,rv);
        } else {
            primitiveProperties.add(names[i]);
        }
    }

// compare shallow primitive properties
if (!primitiveProperties.isEmpty())
    assertEqualsBeans(lhs,rhs,Util.join(primitiveProperties,","));

*
    Makes sure that two collections are identical via {@link #assertEqualDataBoundBeans(Objec
/
public void assertEqualDataBoundBeans(List<?> lhs, List<?> rhs) throws Exception {
    assertEquals(lhs.size(), rhs.size());
    for (int i=0; i<lhs.size(); i++)
        assertEquals(lhs.get(i), rhs.get(i));
}
```

Java

```

/* Process the input string received prior to the
newline. */
do
{
    /* Pass the string to FreeRTOS+CLI. */
    xMoreDataToFollow = FreeRTOS_CLIProcessCommand( cInputString, c0

    /* Send the output generated by the command's
    implementation. */
    sendto( xSocket, cOutputString, strlen( cOutputString ), 0, ( SOCKADDR * ) &xClient

} while( xMoreDataToFollow != pdFALSE ); /* Until the command does not return pdFALSE */

/* All the strings generated by the command processing
have been sent. Clear the input string ready to receive
the next command. */
cInputIndex = 0;
memset( cInputString, 0x00, cmdMAX_INPUT_SIZE );

/* Transmit a spacer, just to make the command console
easier to read.*/
sendto( xSocket, "\r\n", strlen( "\r\n" ), 0, ( SOCKADDR * ) &xClient

}
else
{
    if( cInChar == '\r' )
    {
        /* Ignore the character. Newlines are used to
        detect the end of the input string. */
    }
    else if( cInChar == '\b' )
    {
        /* Backspace was pressed. Erase the last character
        in the string - if any. */
        if( cInputIndex > 0 )
        {
            cInputIndex--;
            cInputString[ cInputIndex ] = '\0';
        }
    }
    else
    {

```

```

/* Process the input string received prior to the
newline. */
do
{
    /* Pass the string to FreeRTOS+CLI. */
    xMoreDataToFollow = FreeRTOS_CLIProcessCommand( cInputString,
        /* Send the output generated by the command's
        implementation. */
        sendto( xSocket, cOutputString, strlen( cOutputString ), 0, 1
    } while( xMoreDataToFollow != pdFALSE ); /* Until the command does

    /* All the strings generated by the command processing
    have been sent. Clear the input string ready to receive
    the next command. */
    cInputIndex = 0;
    memset( cInputString, 0x00, cmdMAX_INPUT_SIZE );

    /* Transmit a spacer, just to make the command console
    easier to read. */
    sendto( xSocket, "\r\n", strlen( "\r\n" ), 0, ( SOCKADDR * ) &xC
se

if( cInChar == '\r' )
{
    /* Ignore the character. Newlines are used to
    detect the end of the input string. */
}
else if( ( cInChar == '\b' ) || ( cInChar == cmdASCII_DEL ) )
{
    /* Backspace was pressed. Erase the last character
    in the string - if any. */
    if( cInputIndex > 0 )
    {
        cInputIndex--;
        cInputString[ cInputIndex ] = '\0';
    }
}
else
{

```

```

if i_kart-life_value < 0,
  write '50'          to it_down-newbs.
  i_kart-life_value = i_kart-life_value * -1.
  write i_kart-life_value      to it_down-wrbtr
                                currency i_kost_ges-currency.
endif.
it_down-xblnr      = w_xblnr.
it_down-zuonr      = w_zuonr.
it_down-sgtxt      = w_sgtxt.
it_down-kostl      = i_kost_ges-fi_life_cost_center.
it_down-zzyber      = '10'.
it_down-bukrs       = i_kost_ges-booking.

*
if it_down-bukrs ne '0001'.
  write 'SA'          to it_down-blart.
  clear it_down-zzyber.
endif.

*
replace all occurrences of '' in it_down-wrbtr with ''.
append it_down.
endloop.

*
describe table it_down lines l_it_down.
it_down-blkz = 'E'.
modify it_down index l_it_down transporting blkz.
endloop.

*
*--- Non-Life Quartal
loop at i_kost_ges where period_type = 'q' and
  non_life_value ne 0.
*      and fehler ne 'X'.
if i_kost_ges-fibu_type = '1'.
  d_fibu_type = text-k01.
*
if i_kart-non_life_value < 0,
  write '50'          to it_down-newbs.
  i_kart-non_life_value = i_kart-non_life_value * -1.
  write i_kart-non_life_value      to it_down-wrbtr
                                currency i_kost_ges-currency.
endif.

*
it_down-xblnr      = w_xblnr.
it_down-zuonr      = w_zuonr.
it_down-sgtxt      = w_sgtxt.
it_down-kostl      = i_kost_ges-fi_non_life_cost_center.
it_down-zzyber      = '10'.
it_down-bukrs       = i_kost_ges-booking.

*
if it_down-bukrs ne '0001'.
  write 'SA'          to it_down-blart.
  clear it_down-zzyber.
endif.

*
append it_down.
endloop.

*
describe table it_down lines l_it_down.
it_down-blkz = 'E'.
modify it_down index l_it_down transporting blkz.
endloop.

*
*--- Monatlich Health
loop at i_kost_ges where period_type = 'm' and
  health_value ne 0.
*      and fehler ne 'X'.
if i_kost_ges-fibu_type = '1'.
  d_fibu_type = text-k01.
*

```

larger/source/.../PriceElementUtil.plsql (revision default:1...)

```

223     AND    NVL(t.valid_from, Database_SYS.Get_First_Calendarday(contract_));
224     AND    NVL(t.valid_to, Database_SYS.Get_Last_Calendarday(contract_));
225
226 BEGIN
227     OPEN get_price_interval;
228     FETCH get_price_interval INTO valid_from_, valid_until_, valid_date_;
229     CLOSE get_price_interval;
230     IF valid_from_ > Site_API.Get_Site_Date(contract_)
231         valid_date_ := valid_from_;
232     ELSE
233         valid_date_ := LEAST(NVL(valid_until_, TRUNC(Site_API.Get_Site_Date(contract_))), valid_from_);
234     END IF;
235
236     -- only calculate unit base (False) but no metal surcharge
237     temp1_ :=0;
238
239     OPEN get_pl_currency_code;
240     FETCH get_pl_currency_code INTO pl_currency_code_;
241     CLOSE get_pl_currency_code;
242
243     FOR rec_ IN get_all_conn_unit_base_false LOOP

```

larger/source/.../PriceElementUtil.plsql (revision default:1...)

```

346 BEGIN
347     OPEN get_price_interval;
348     FETCH get_price_interval INTO valid_from_, valid_until_, valid_date_;
349     CLOSE get_price_interval;
350     IF valid_from_ > Site_API.Get_Site_Date(contract_)
351         valid_date_ := valid_from_;
352     ELSE
353         -- Change for Ticket #1234 (START)
354         --valid_date_ := LEAST(NVL(valid_until_, TRUNC(Site_API.Get_Site_Date(contract_))), valid_from_);
355         valid_date_ := LEAST(NVL(valid_until_, Site_API.Get_Site_Date(contract_)), valid_from_);
356         -- Change for Ticket #1234 (FINISH)
357     END IF;
358
359     -- calculate only metal surcharge without unit base
360     temp3_ :=0;
361
362     OPEN get_pl_currency_code;
363     FETCH get_pl_currency_code INTO pl_currency_code_;
364     CLOSE get_pl_currency_code;
365
366     FOR rec_ IN get_all_metal_surcharge LOOP

```

```

54     tierQuery.or(\orCriteria -> {
55         orCriteria.compare(TerrorismTargetTier_Ext#County, Equals, polLocation.County)
56         orCriteria.compare(TerrorismTargetTier_Ext#County, Equals, null)
57     })
58     tierQuery.or(\orCriteria -> {
59         orCriteria.compare(TerrorismTargetTier_Ext#City, Equals, polLocation.City)
60         orCriteria.compare(TerrorismTargetTier_Ext#City, Equals, null)
61     })
62     tierQuery.or(\orCriteria -> {
63         orCriteria.compare(TerrorismTargetTier_Ext#ZipCode, Equals, polLocation.PostalCode)
64         orCriteria.compare(TerrorismTargetTier_Ext#ZipCode, Equals, null)
65     })
66
67     var results = tierQuery.select()
68     if(results.Elements) {
69         var result = results.firstWhere( \ elt -> elt.ZipCode == polLocation.PostalCode and
70             elt.County == polLocation.County and elt.City == polLocation.City)
71         var result2 = results.firstWhere( \ elt -> elt.County == polLocation.County and elt.City == p
72         var result3 = results.firstWhere( \ elt -> elt.County == polLocation.County)
73
74     if(result != null) {
75         ...
76     }
77 }

```

```

54
55
56
57     tierQuery.or(\orCriteria -> {
58         orCriteria.compareIgnoreCase(TerrorismTargetTier_Ext#County, Equals, polLocation.County)
59         orCriteria.compare(TerrorismTargetTier_Ext#County, Equals, null)
60     })
61
62     tierQuery.or(\orCriteria -> {
63         orCriteria.compare(TerrorismTargetTier_Ext#City, Equals, polLocation.City)
64         orCriteria.compare(TerrorismTargetTier_Ext#City, Equals, null)
65     })
66
67     var results = tierQuery.select()
68     if(results.Elements) {
69         var result = results.firstWhere( \ elt -> elt.ZipCode == polLocation.PostalCode and
70             elt.County == polLocation.County and elt.City == polLocation.City)
71         var result2 = results.firstWhere( \ elt -> elt.County == polLocation.County and elt.City == p
72         // [REDACTED] - Defect 224 [REDACTED] - Fix for defaulting target tier value irrespective of lower and upper
73         var result3 = results.firstWhere( \ elt -> elt.County.equalsIgnoreCase(polLocation.County))
74
75     if(result != null) {
76
77 }

```

Study



- Over 100 Bugs in produktive Software

17
Kritisch


44
Nutzersichtbar


46
Nicht nutzersichtbar

- 52% of all unintentional inconsistencies are buggy

Juergens, Deissenboeck et al: *Do Code Clones Matter?* ICSE 2009


Was tun?

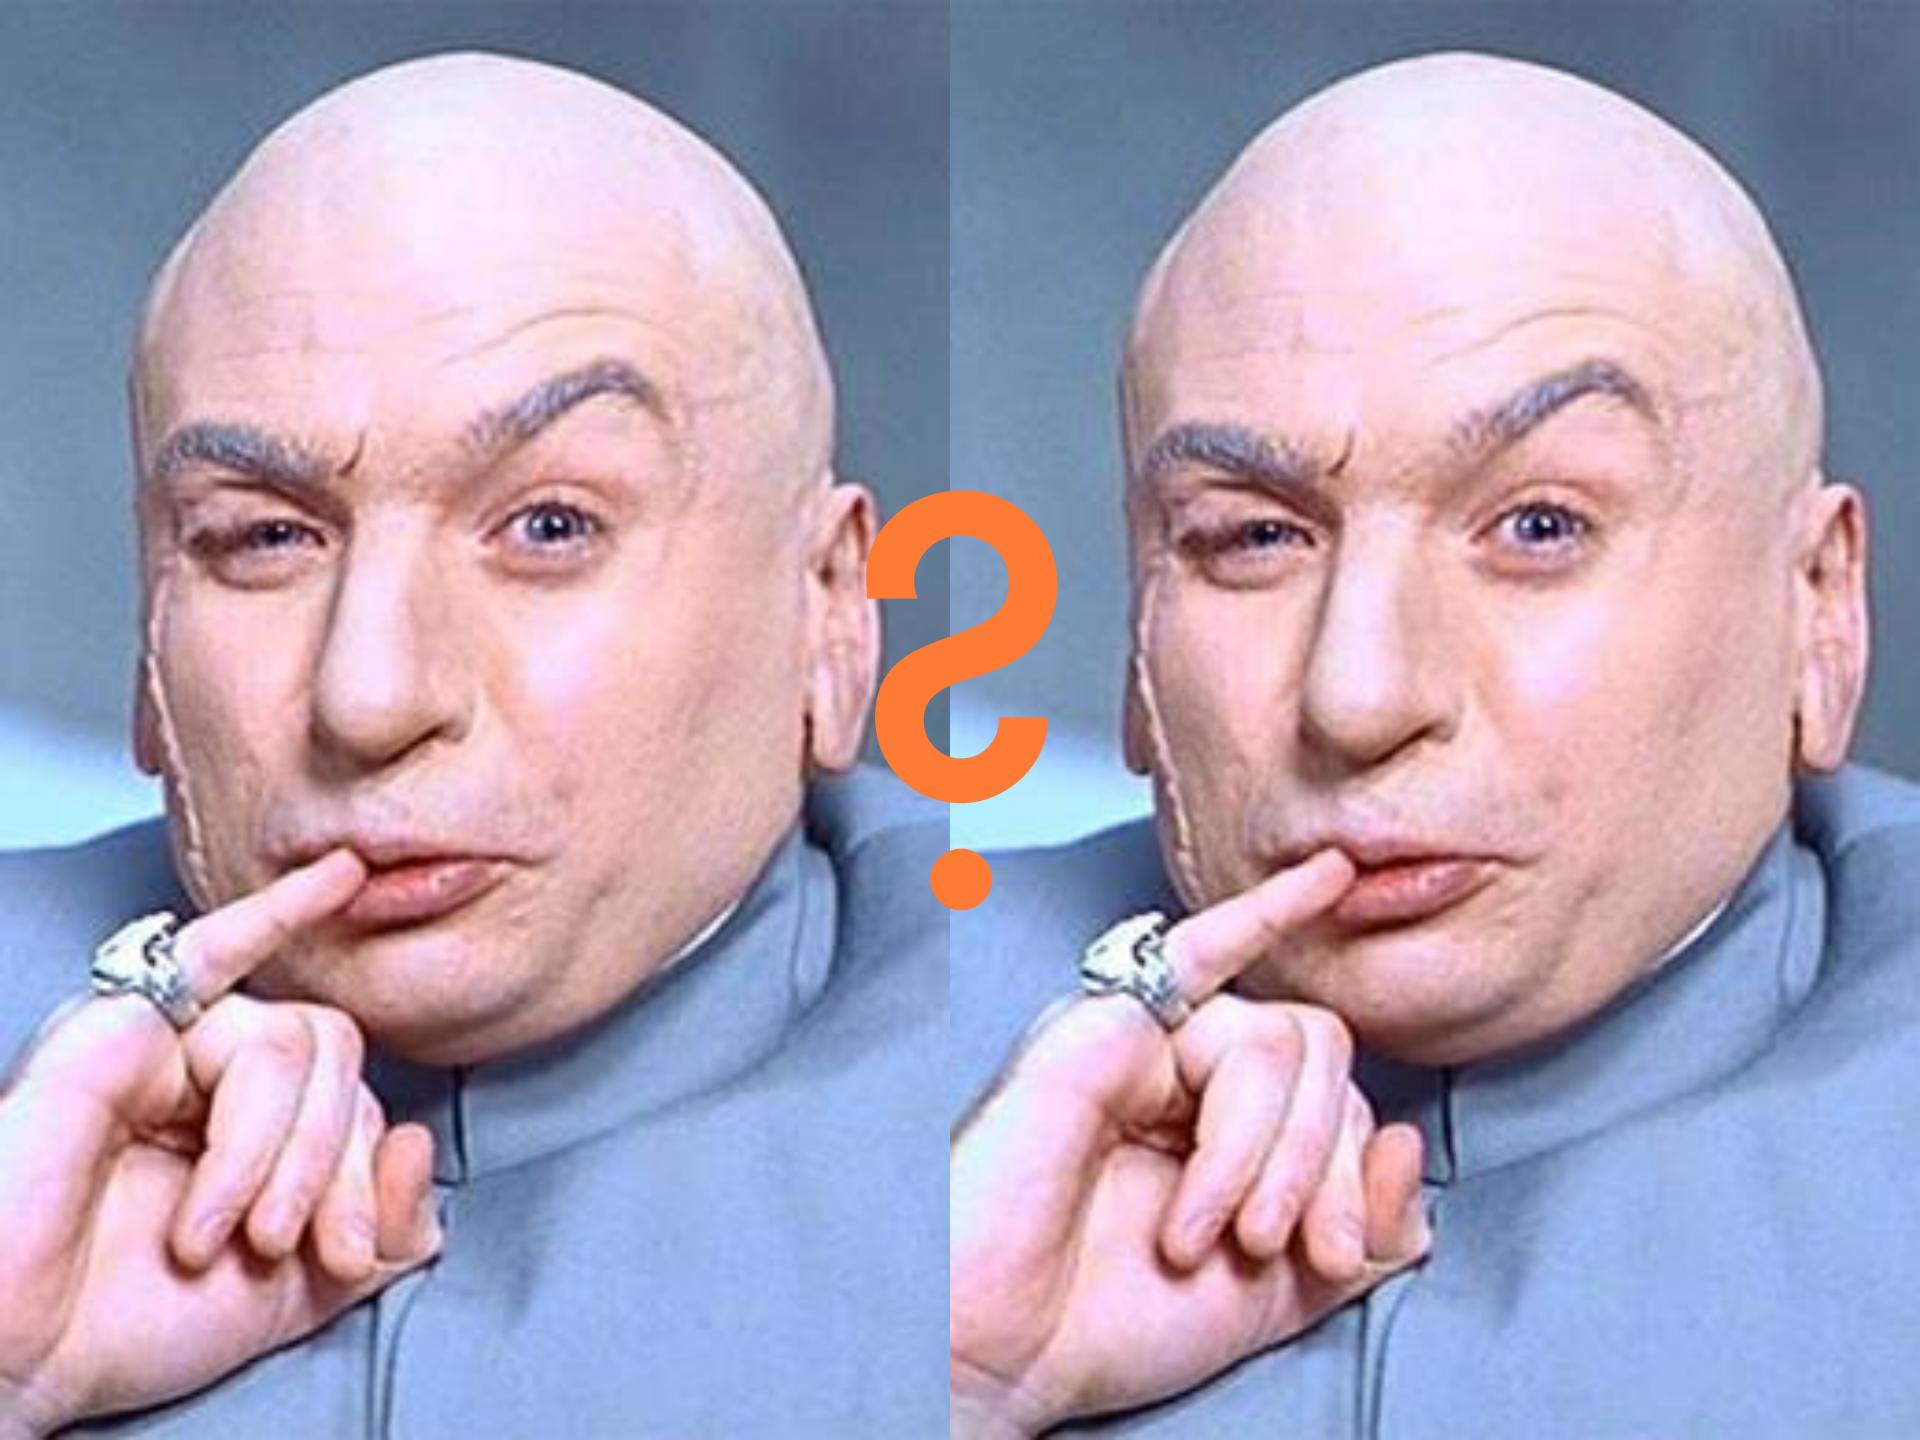

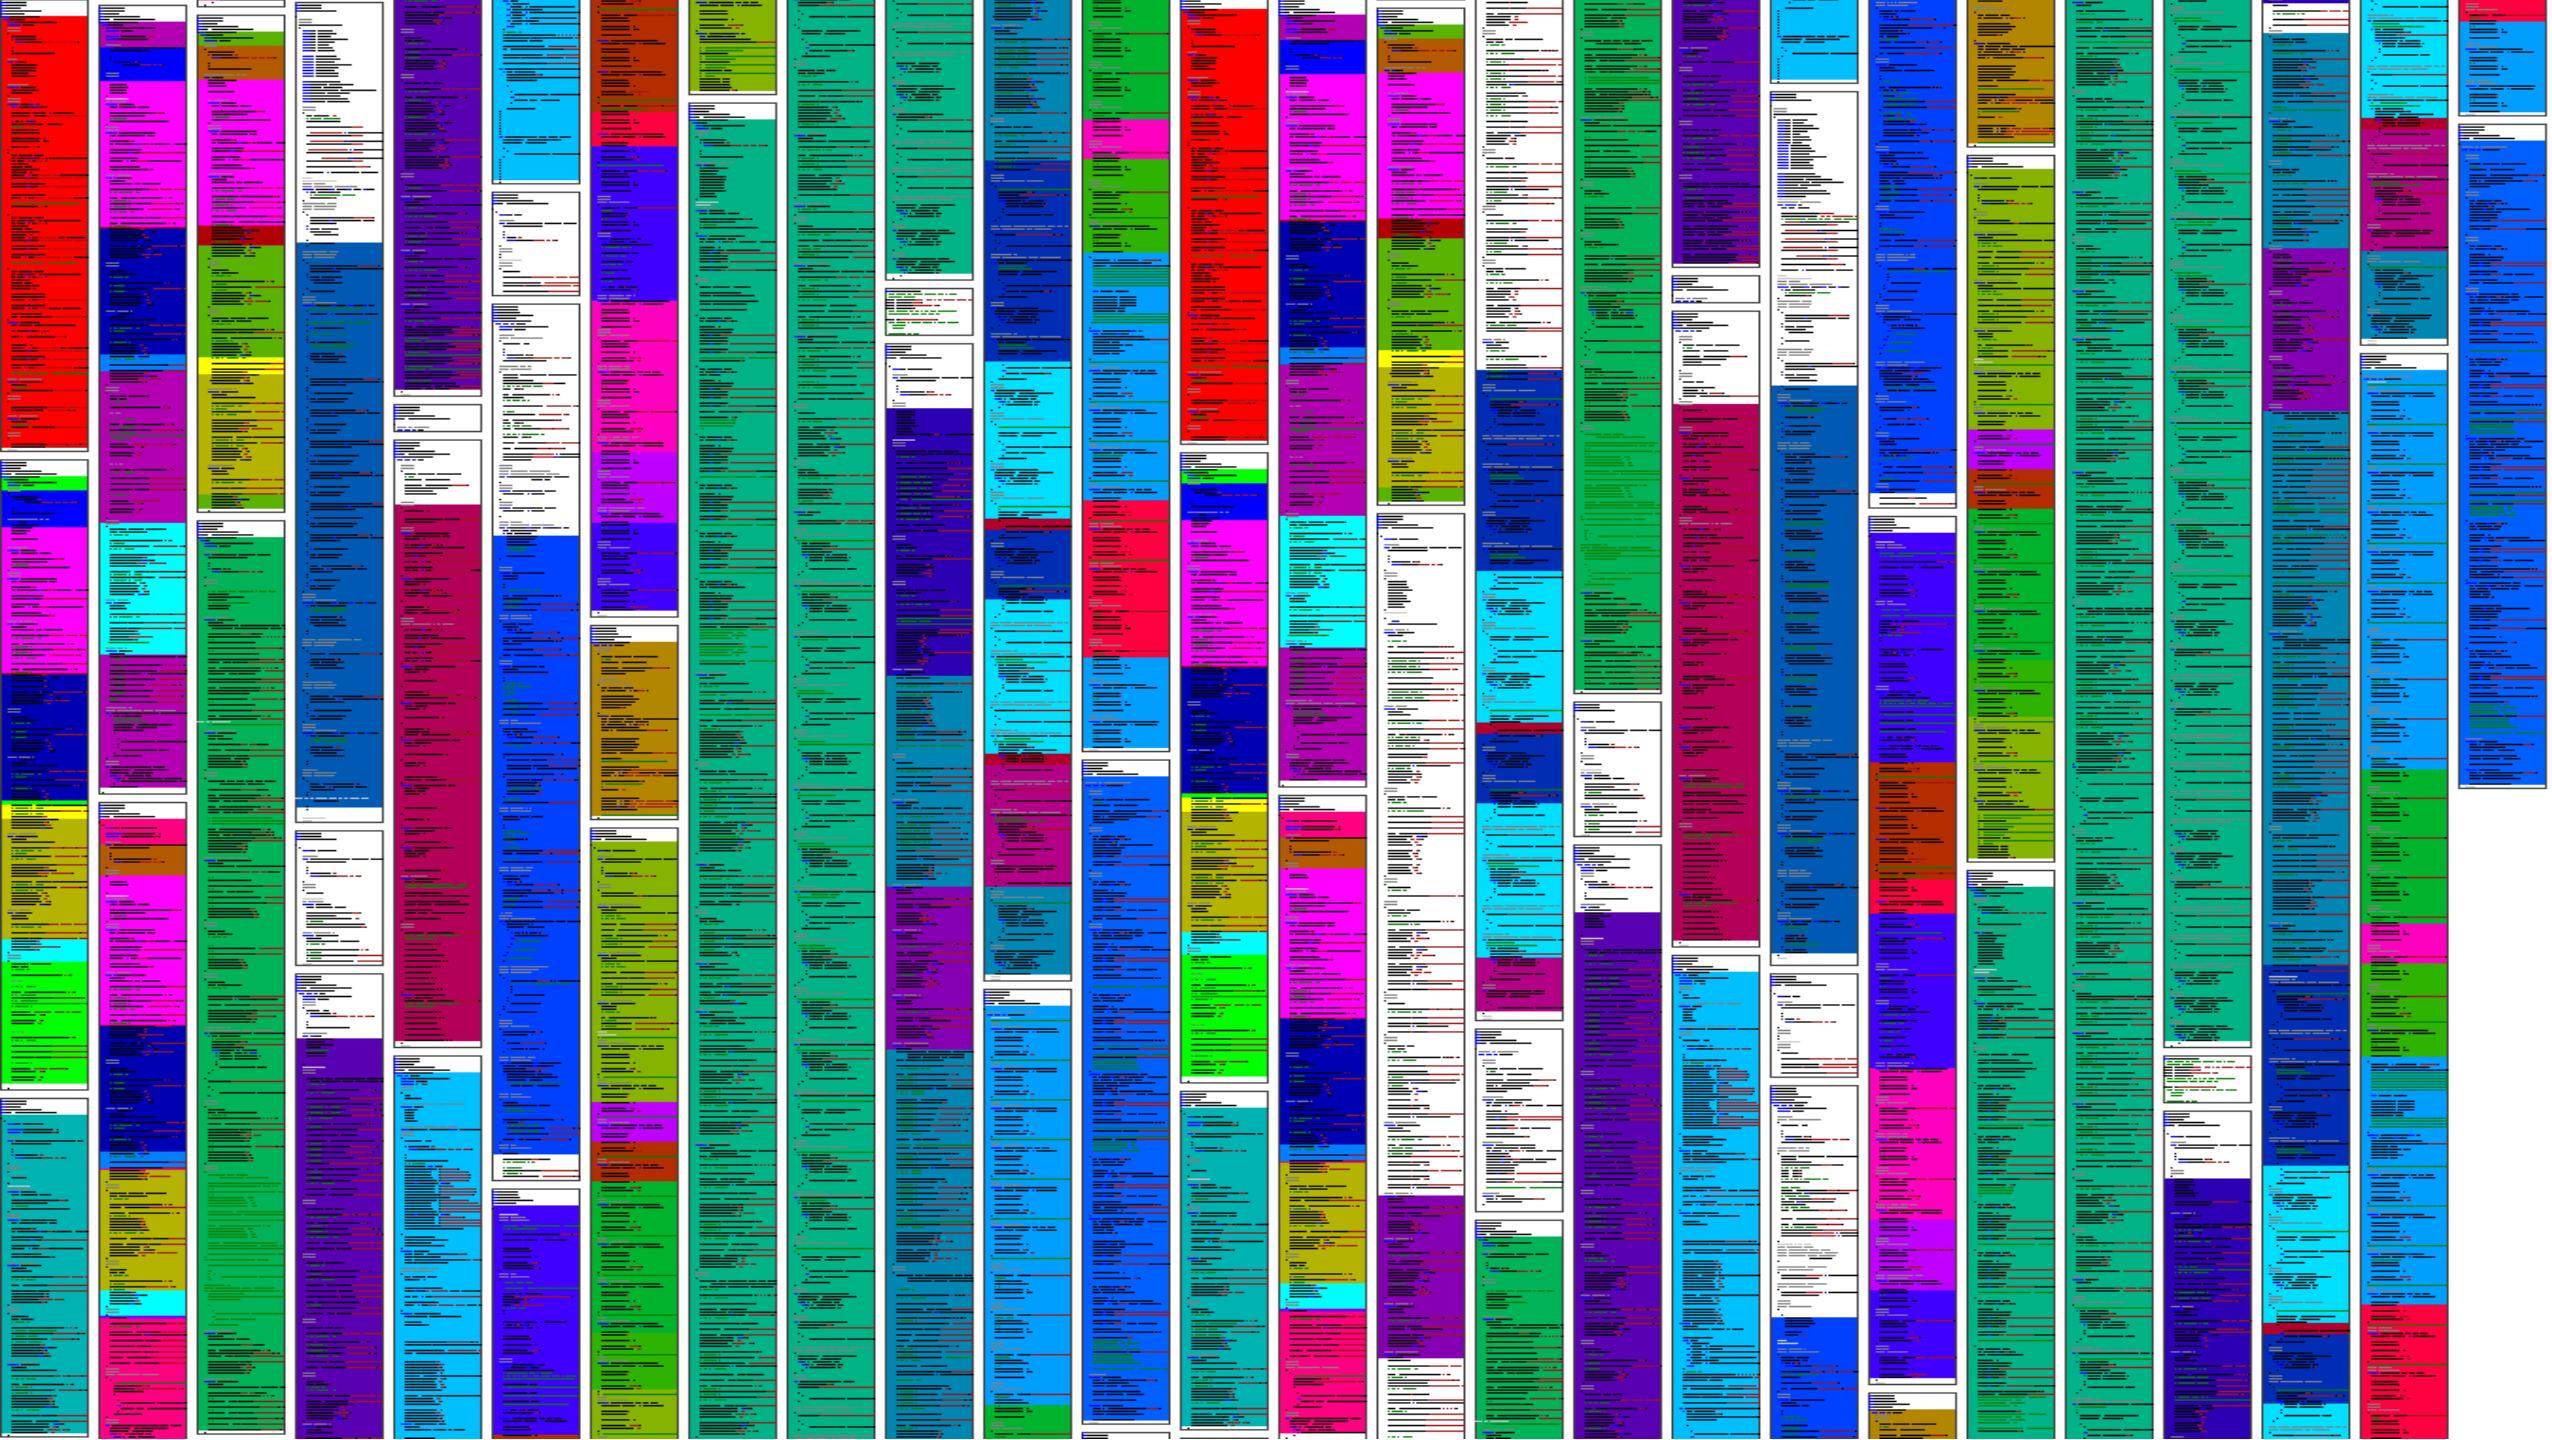

Komponente A


Komponente B

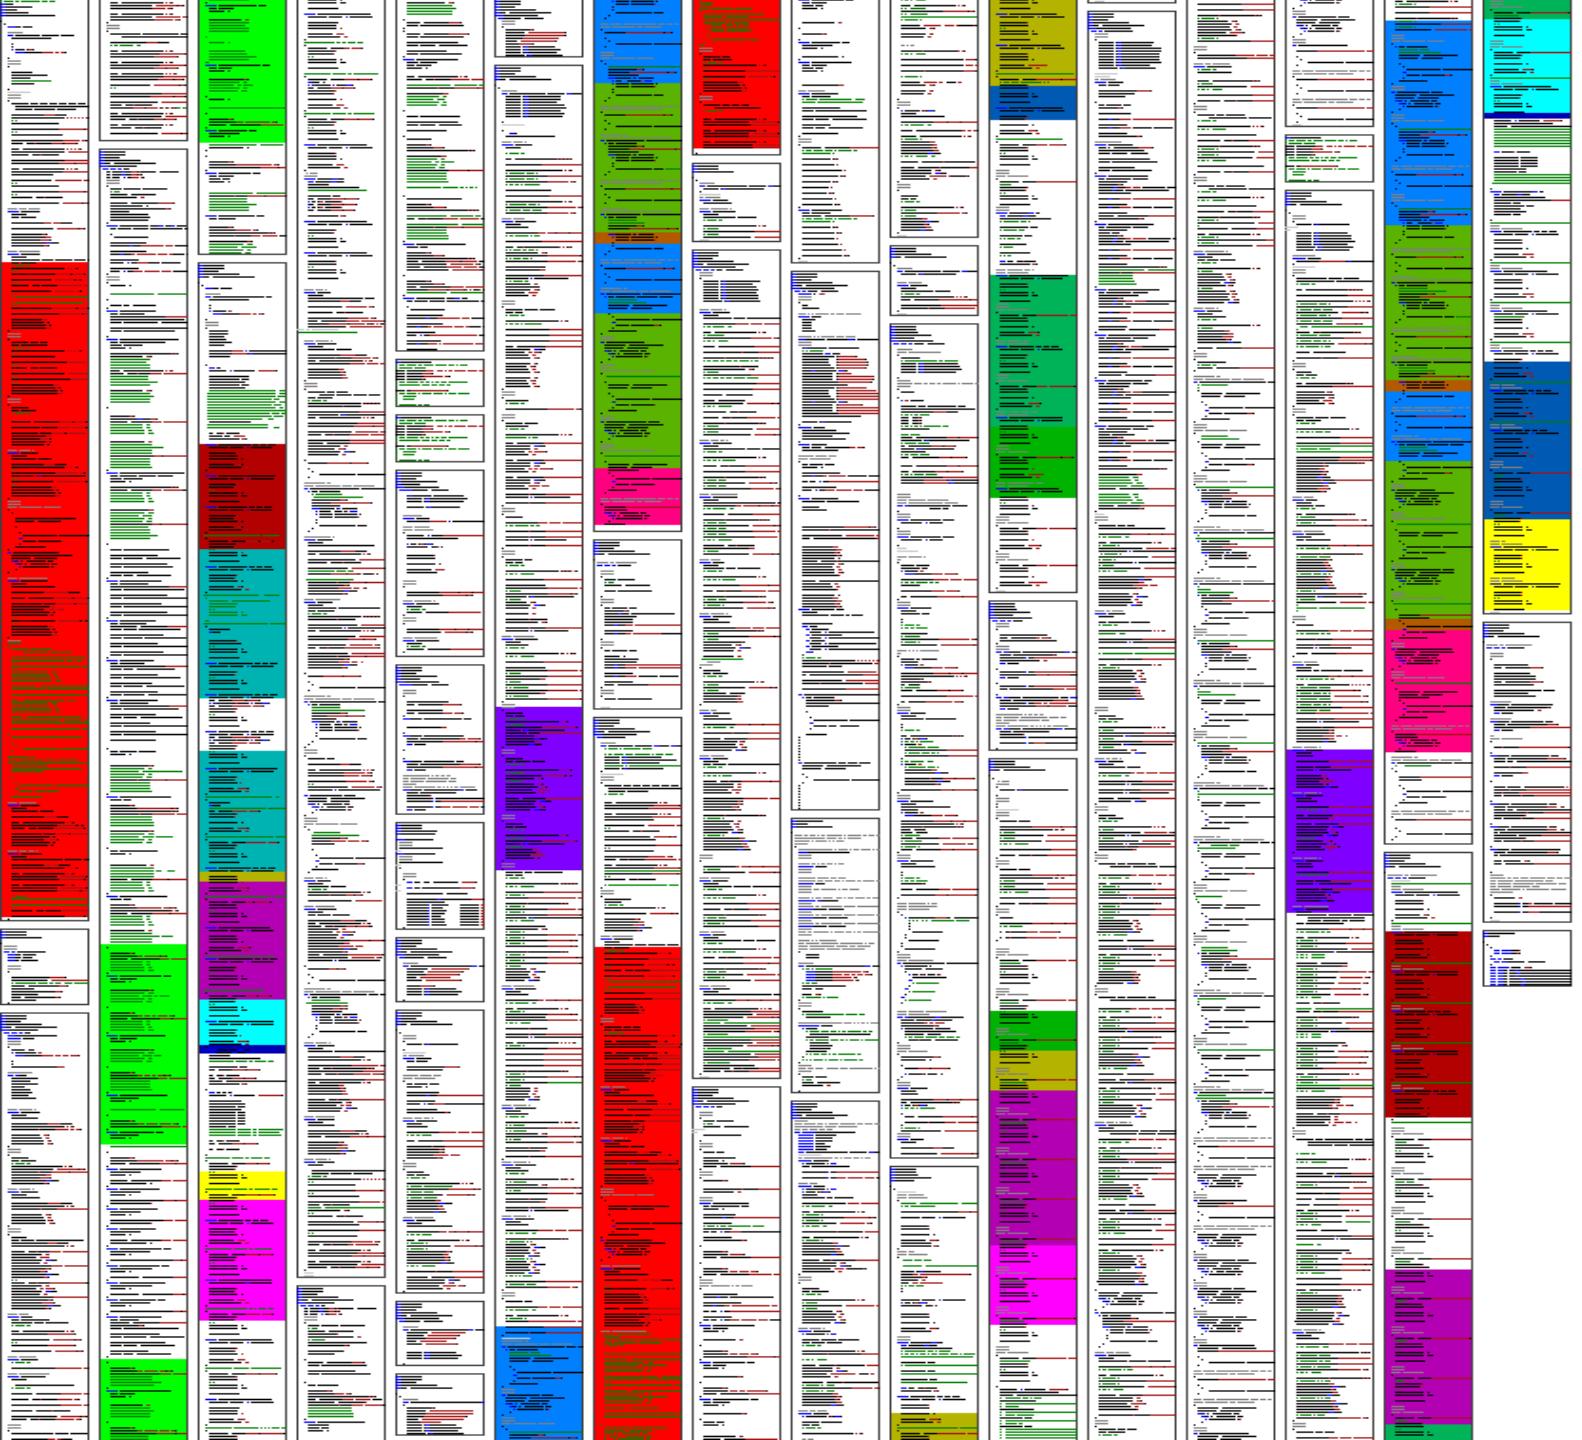



Ad-Hoc Reuse in a Build-System






	Ad hoc Reuse
Build Definitions	81
Lines of Code	457.388
Clone Coverage	97,5%
Blow-Up	929%

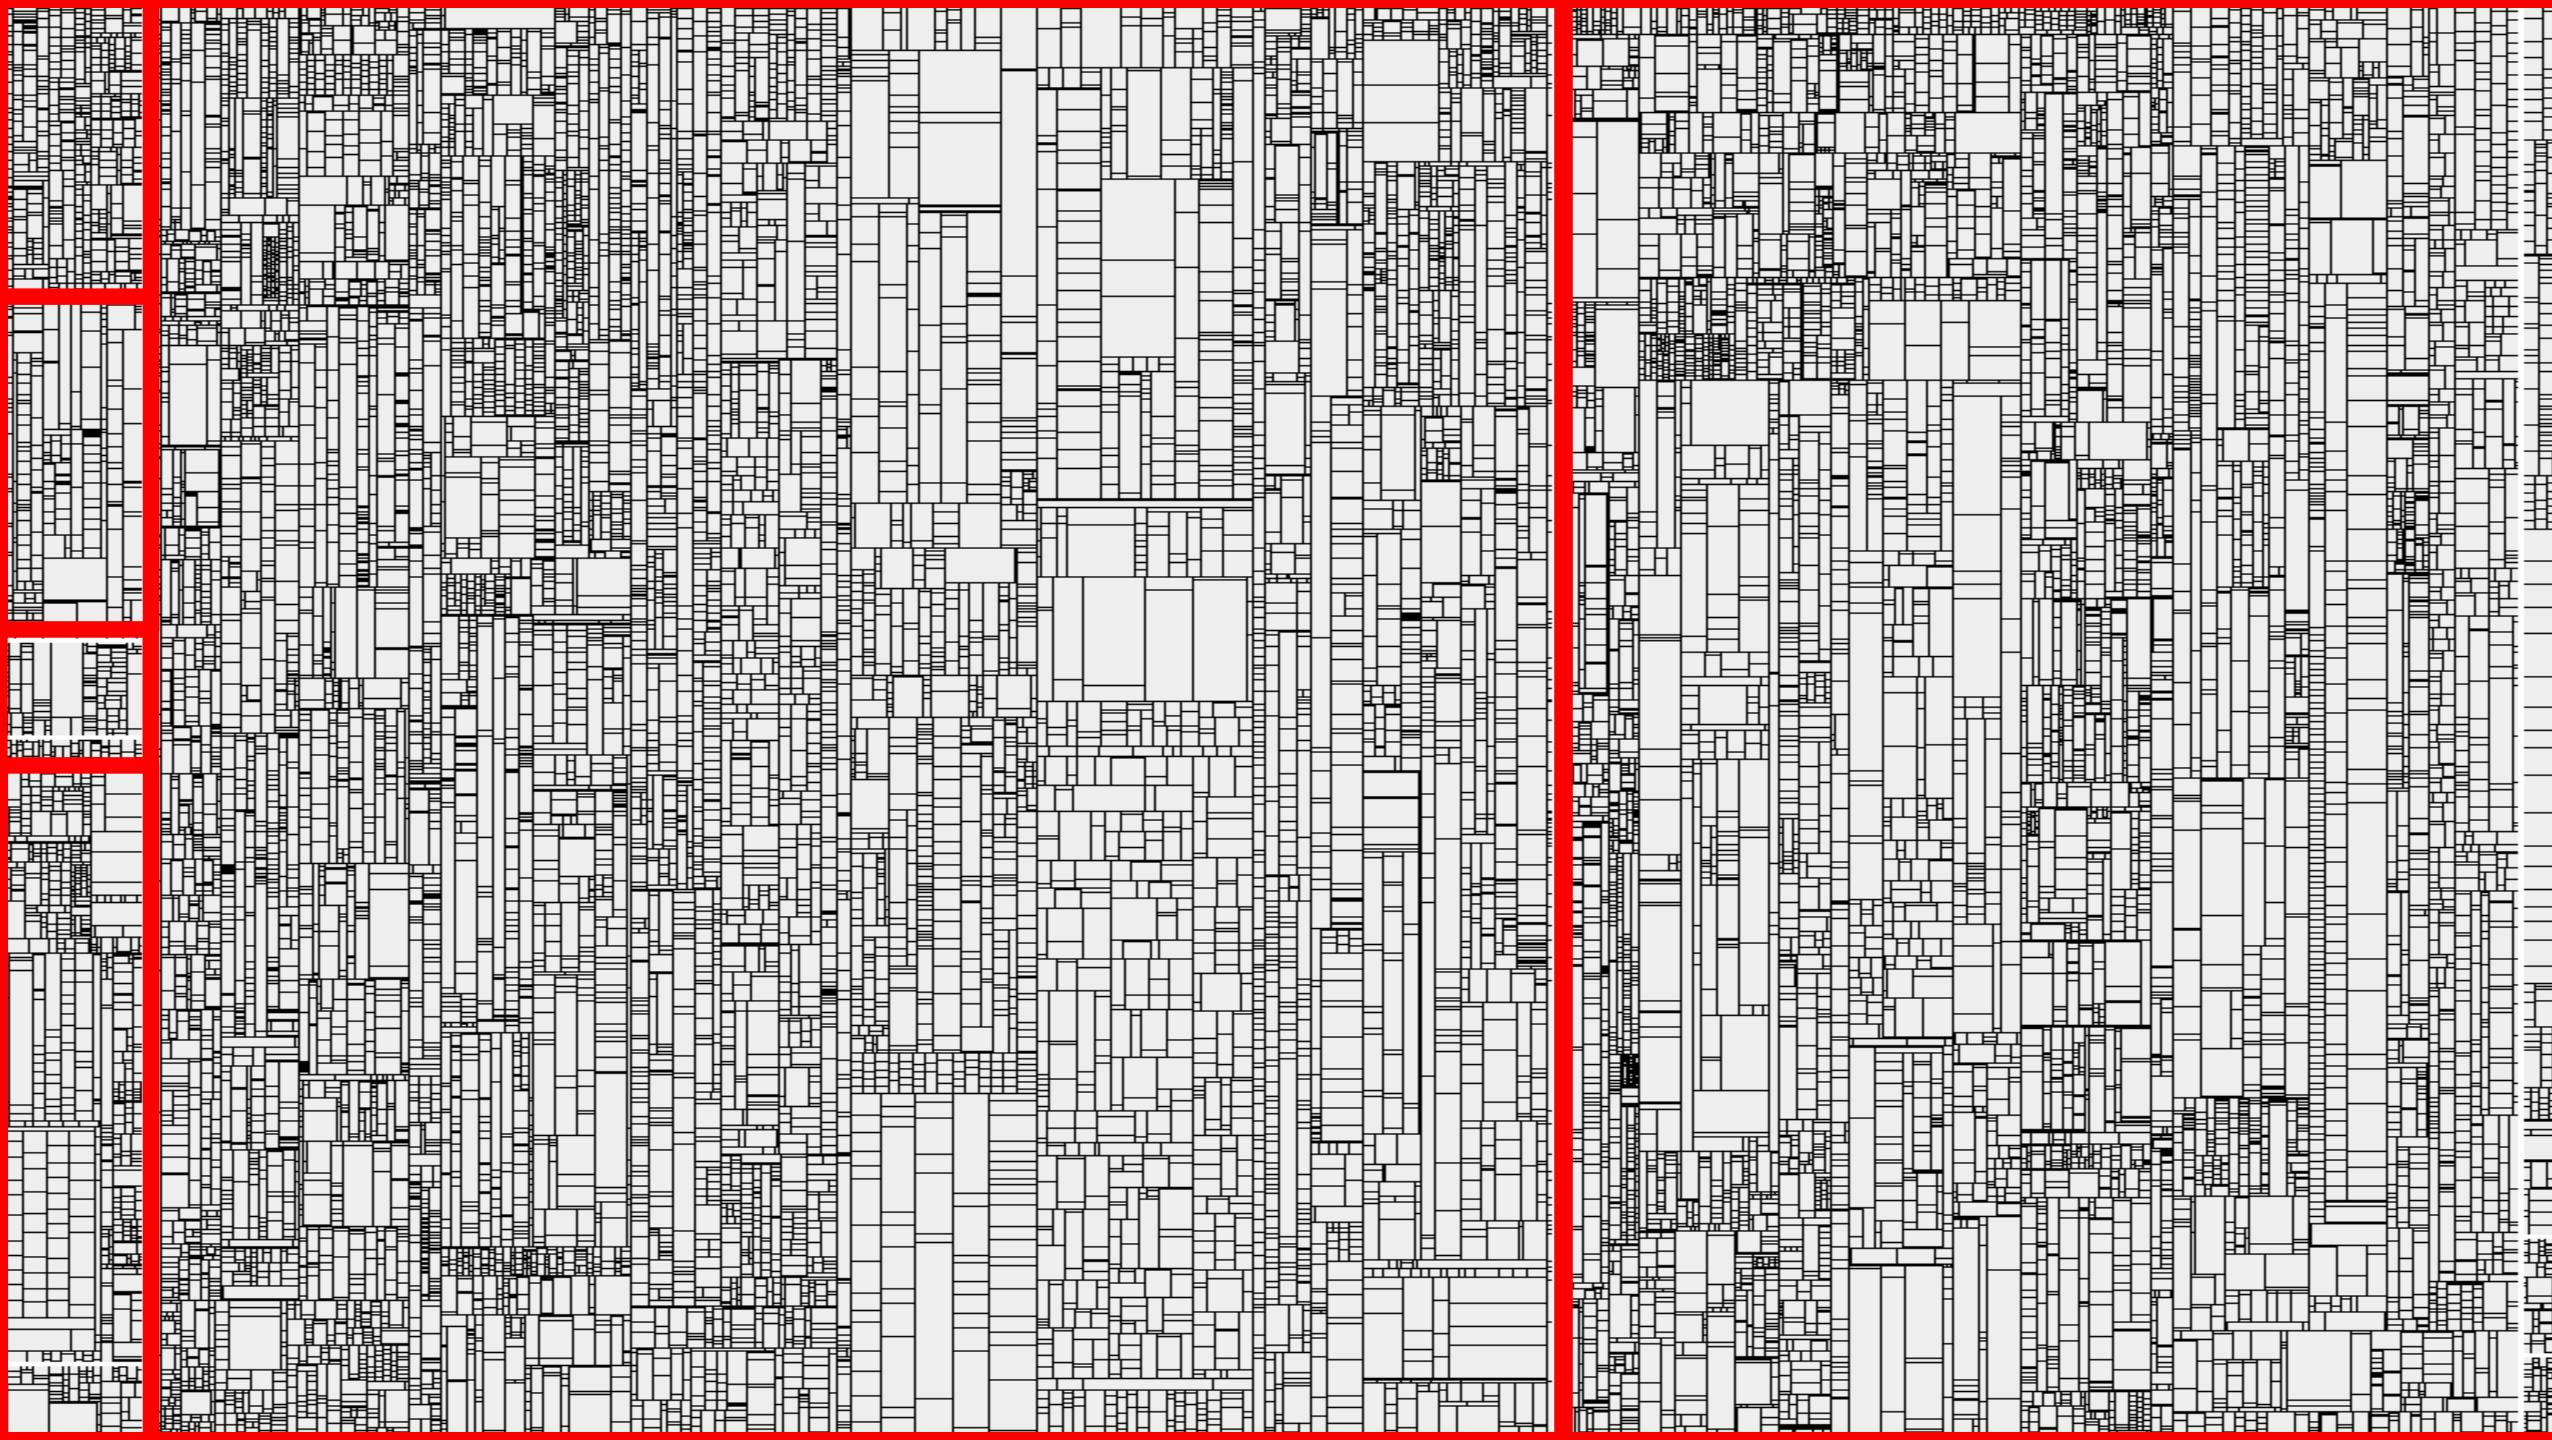


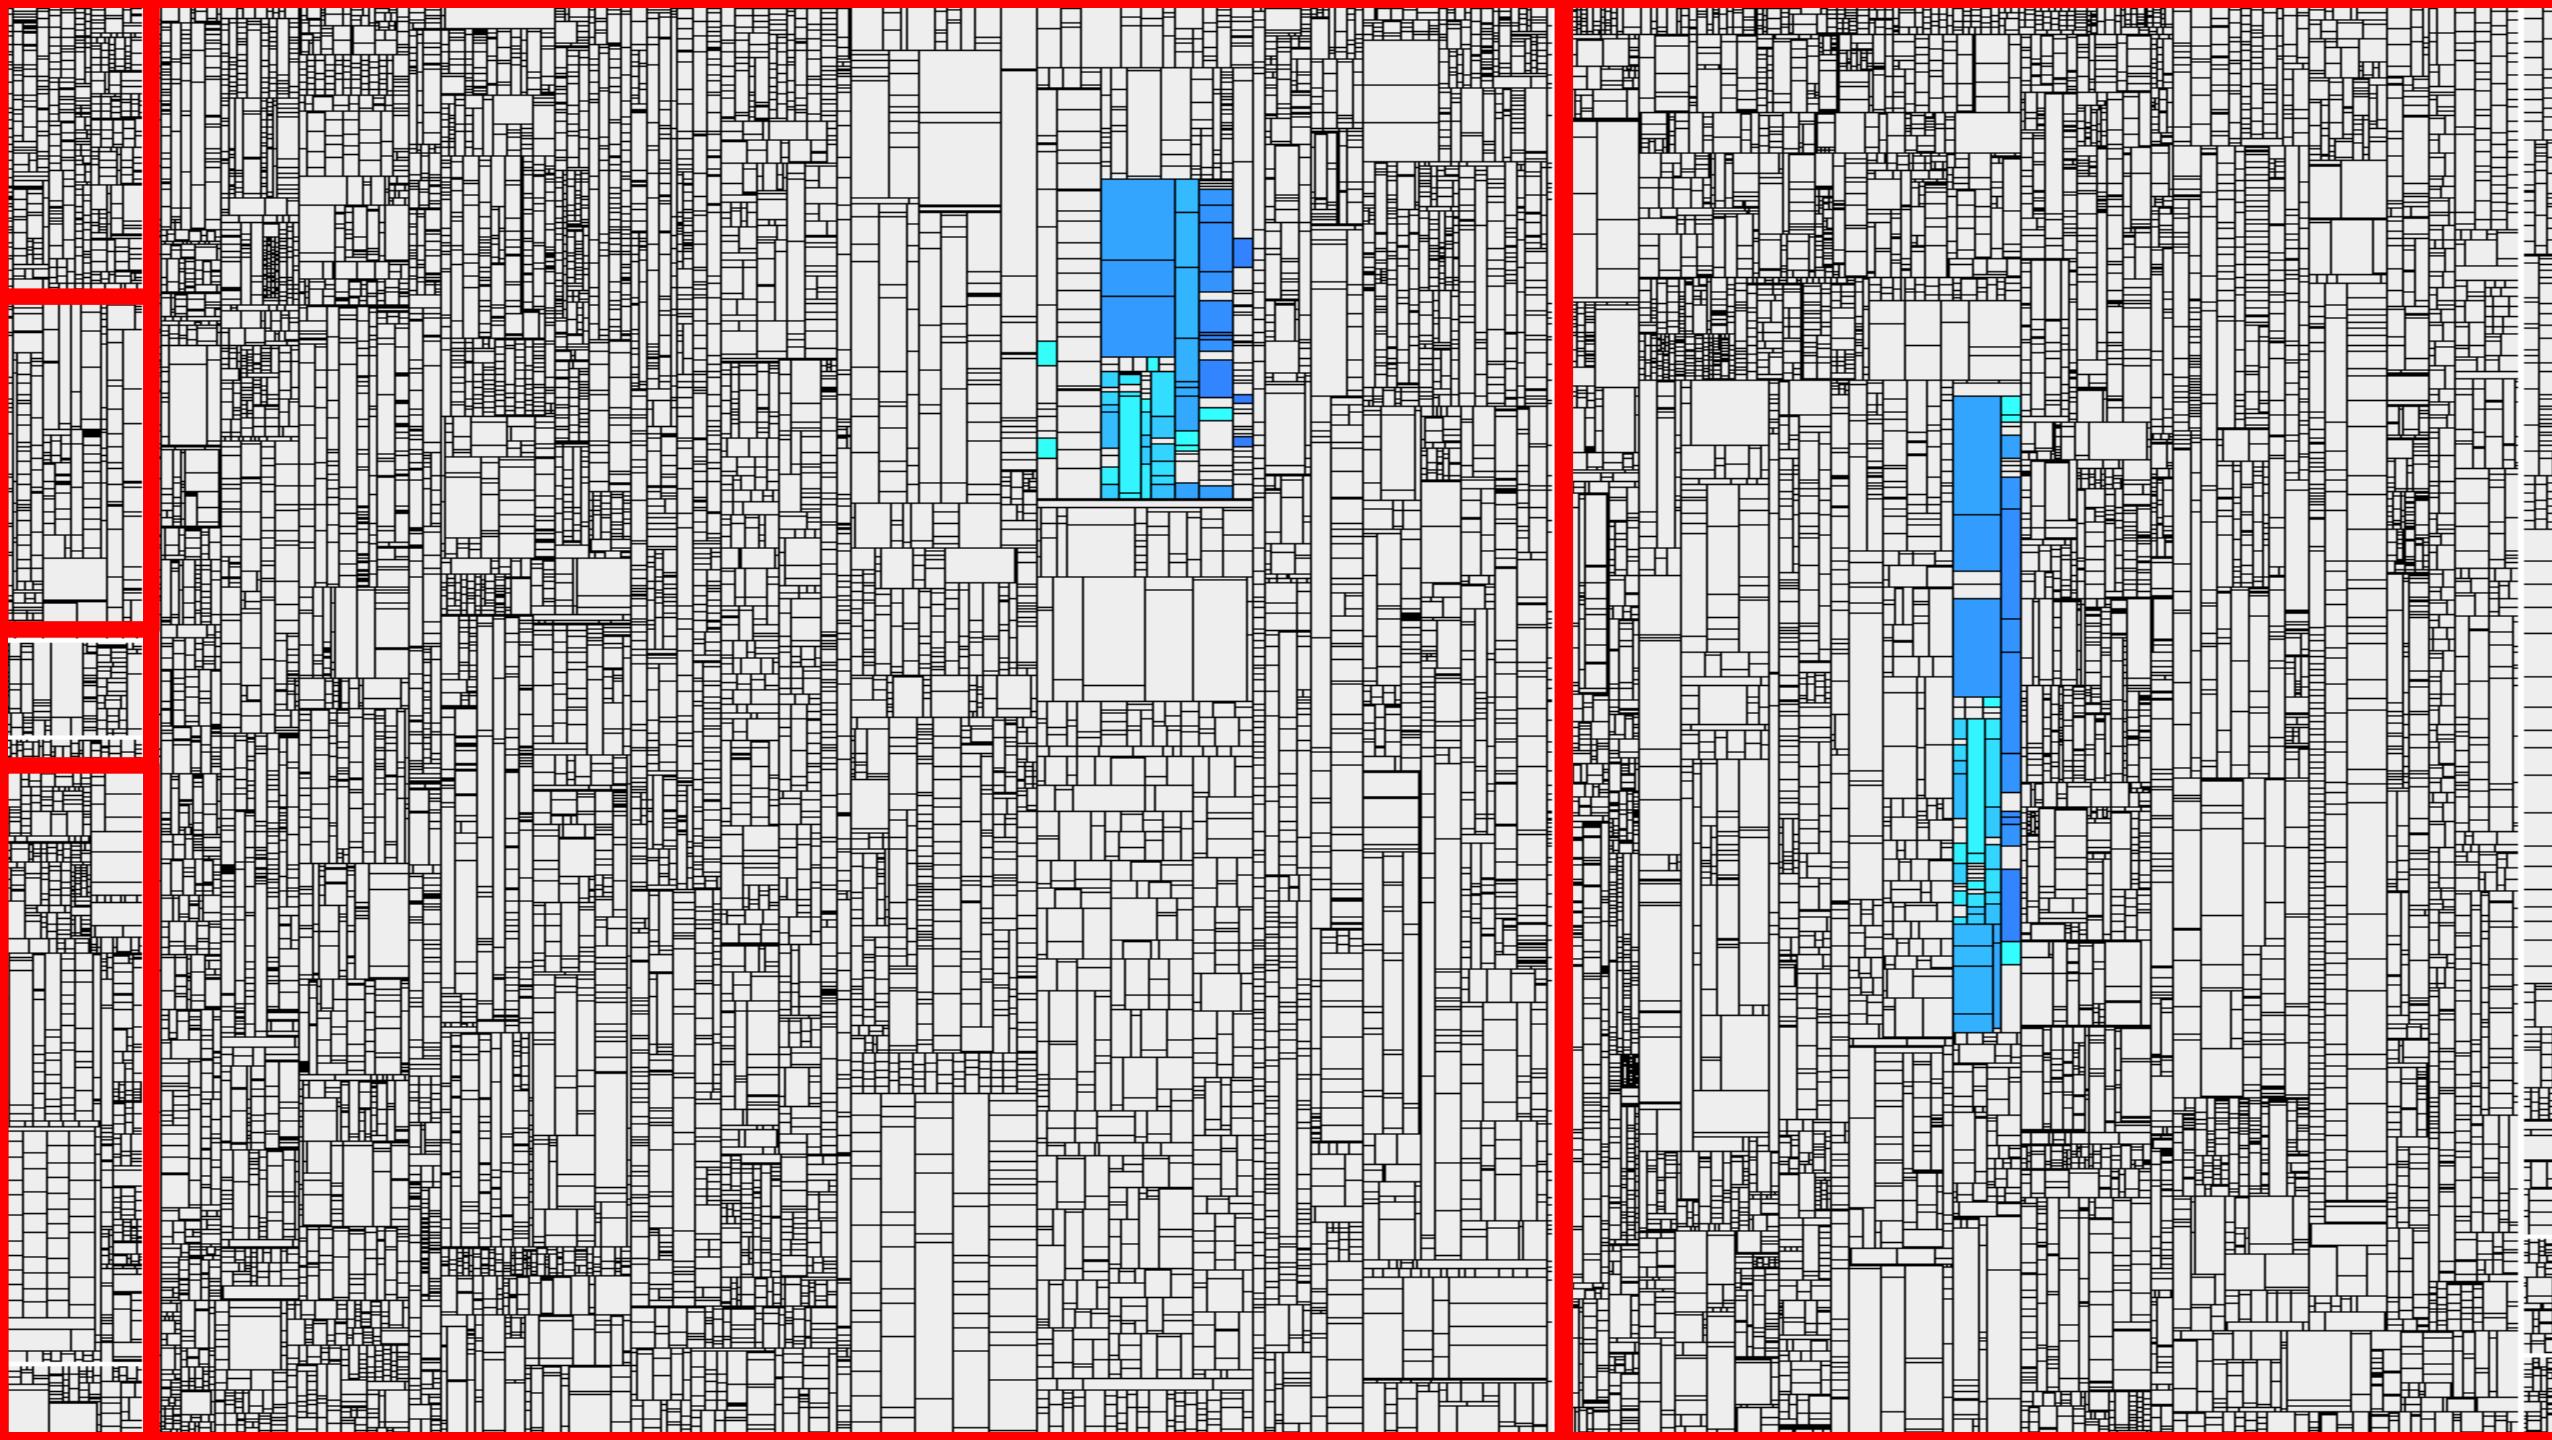

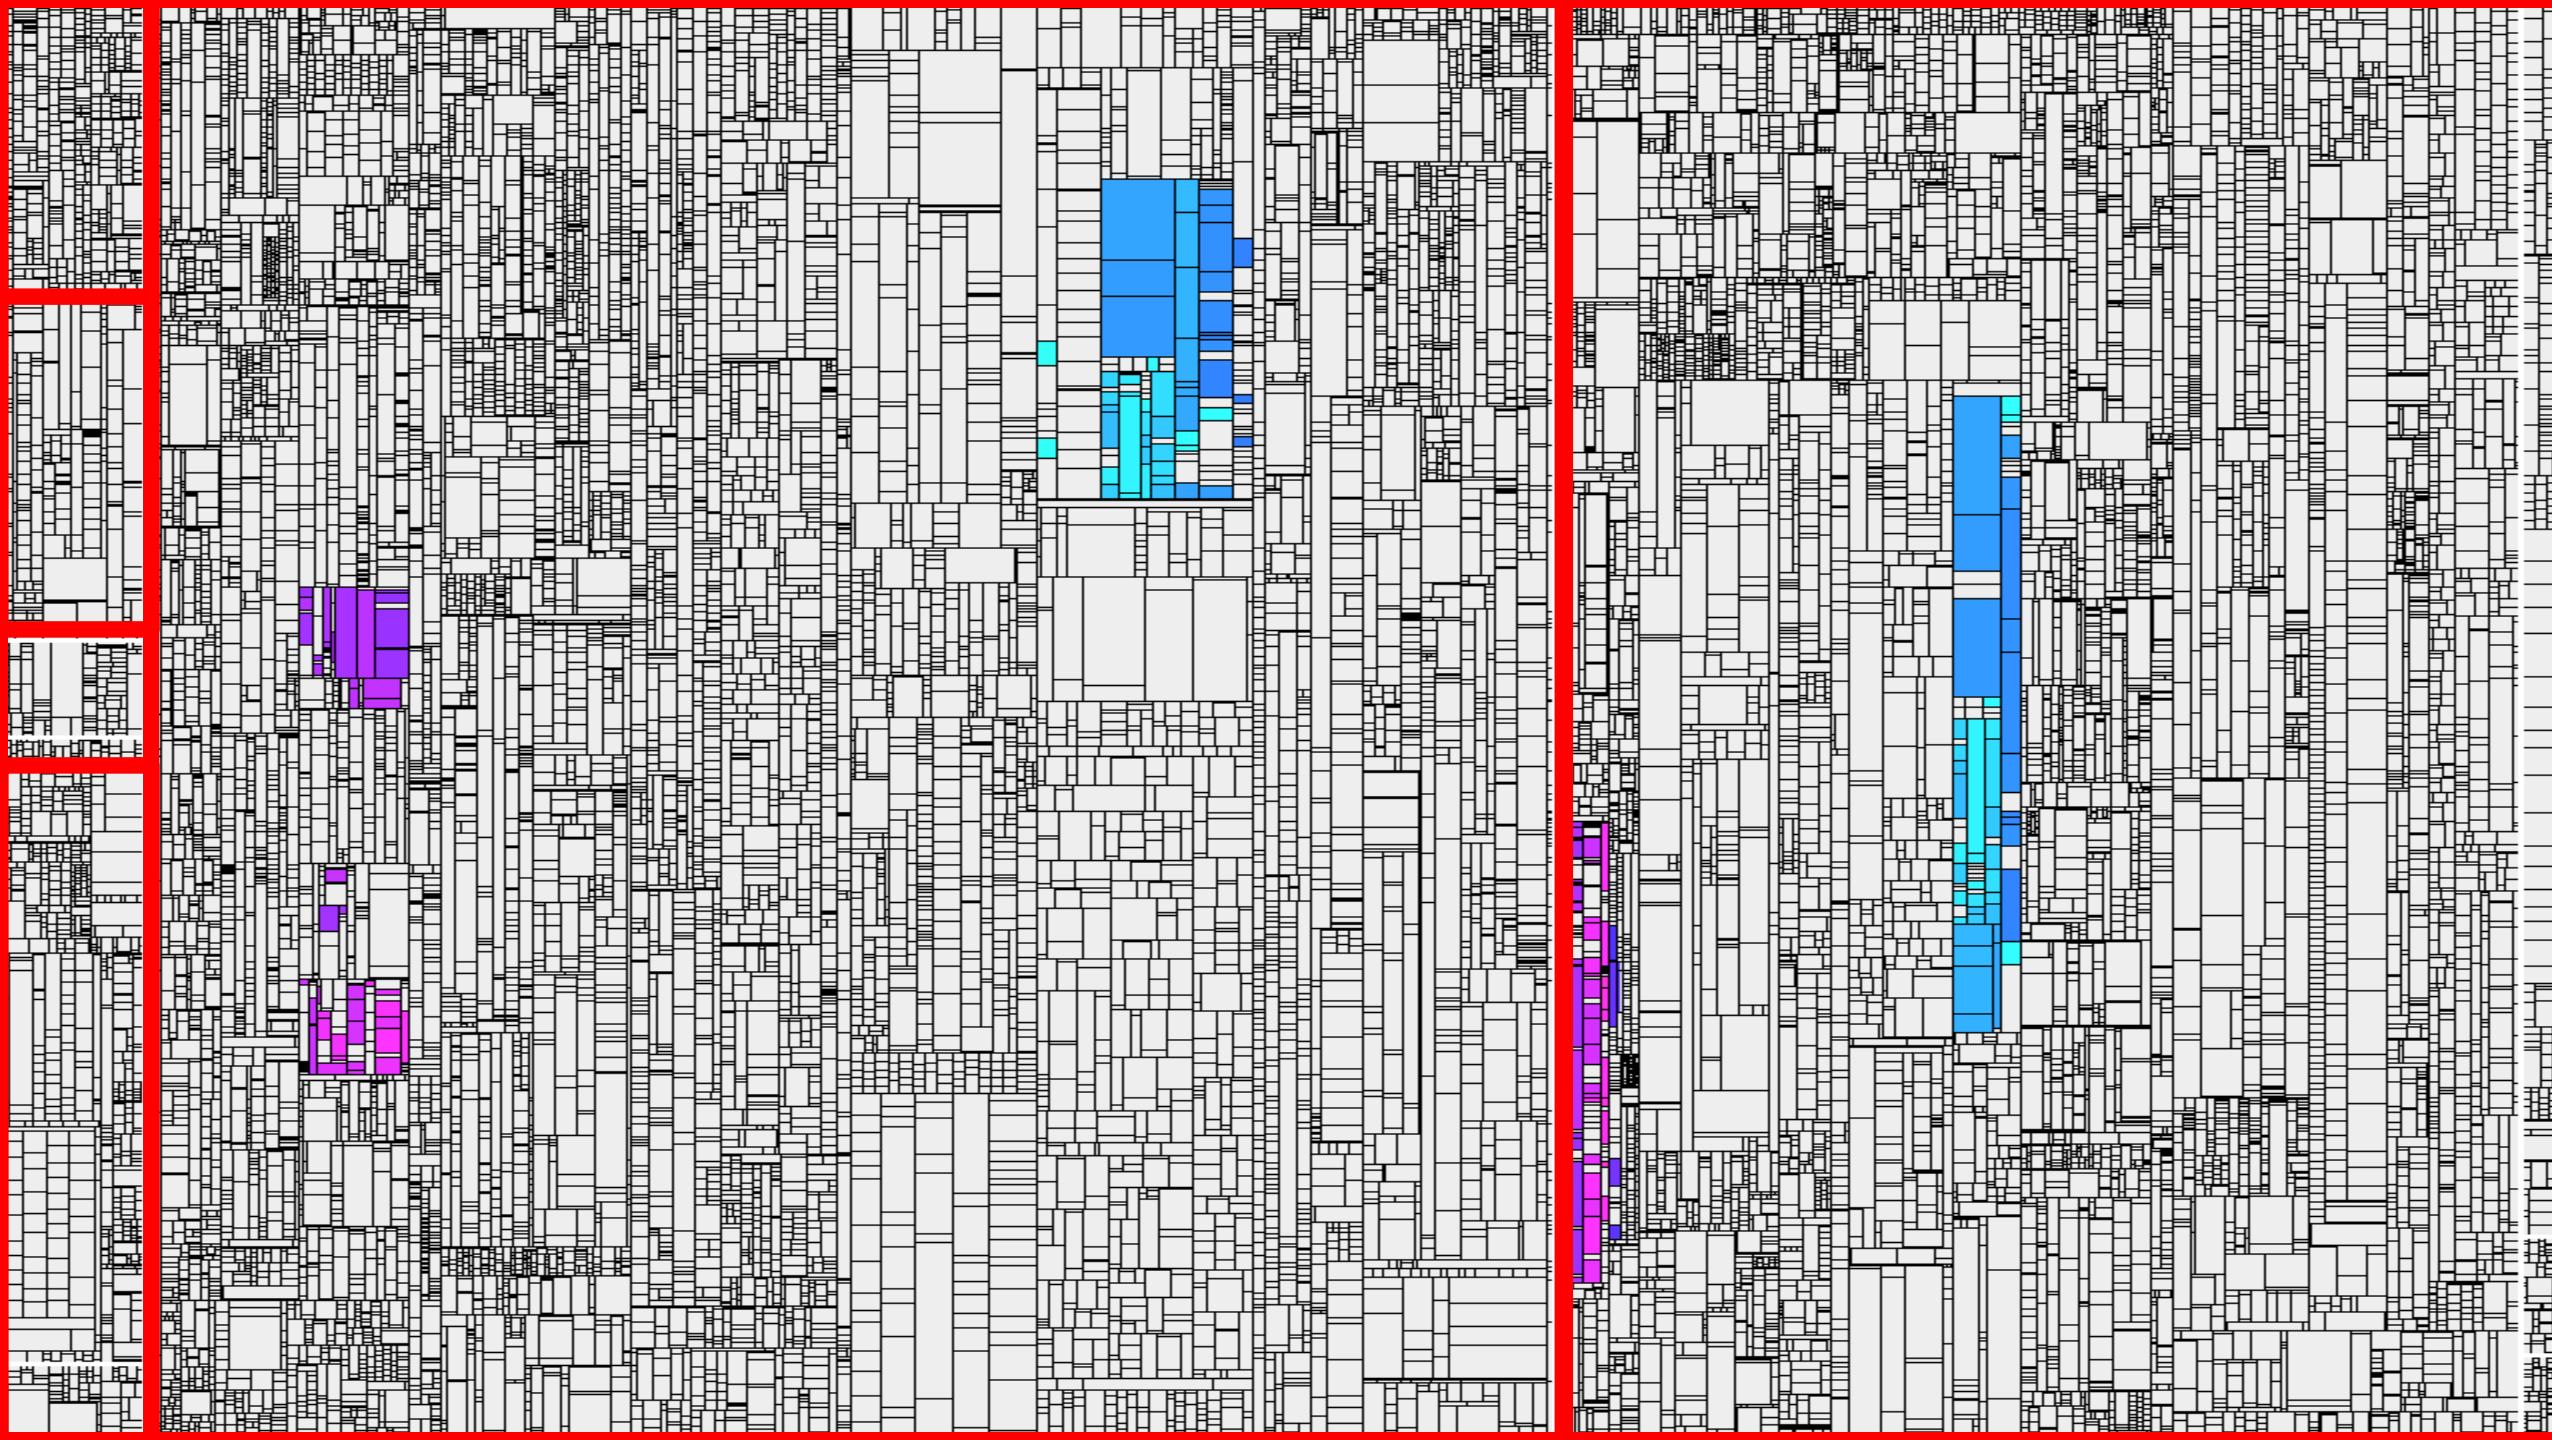

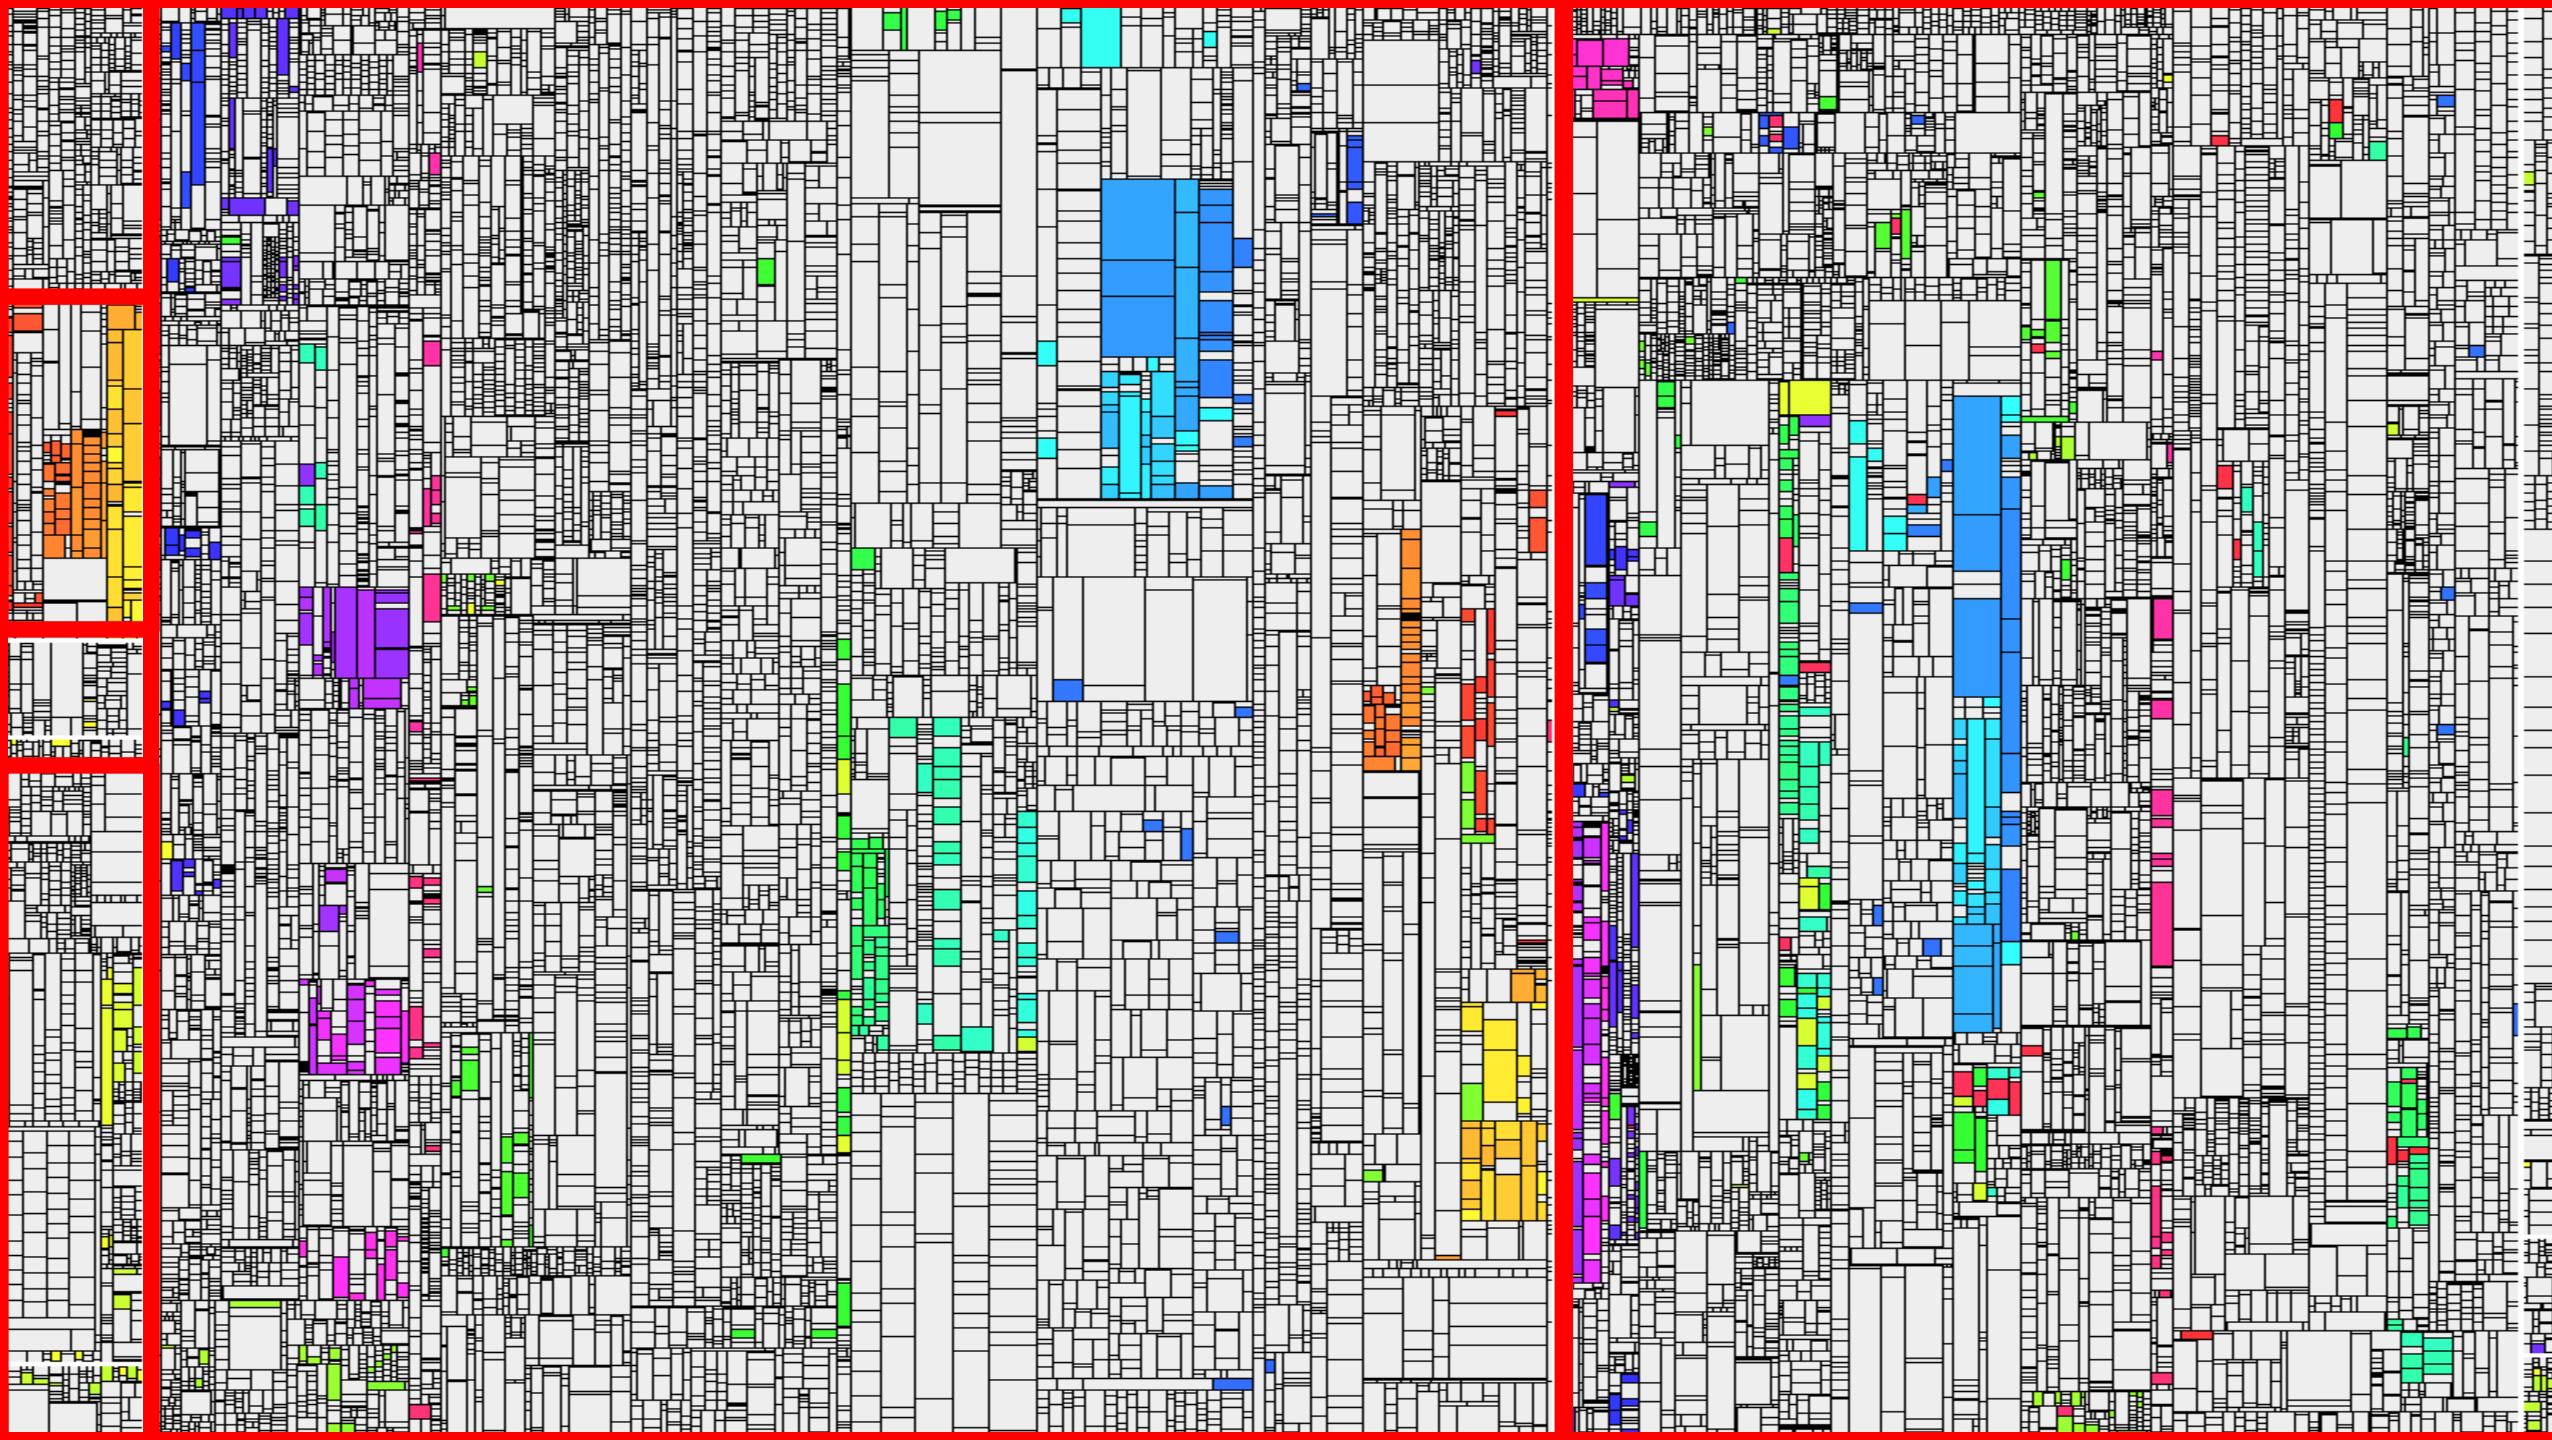

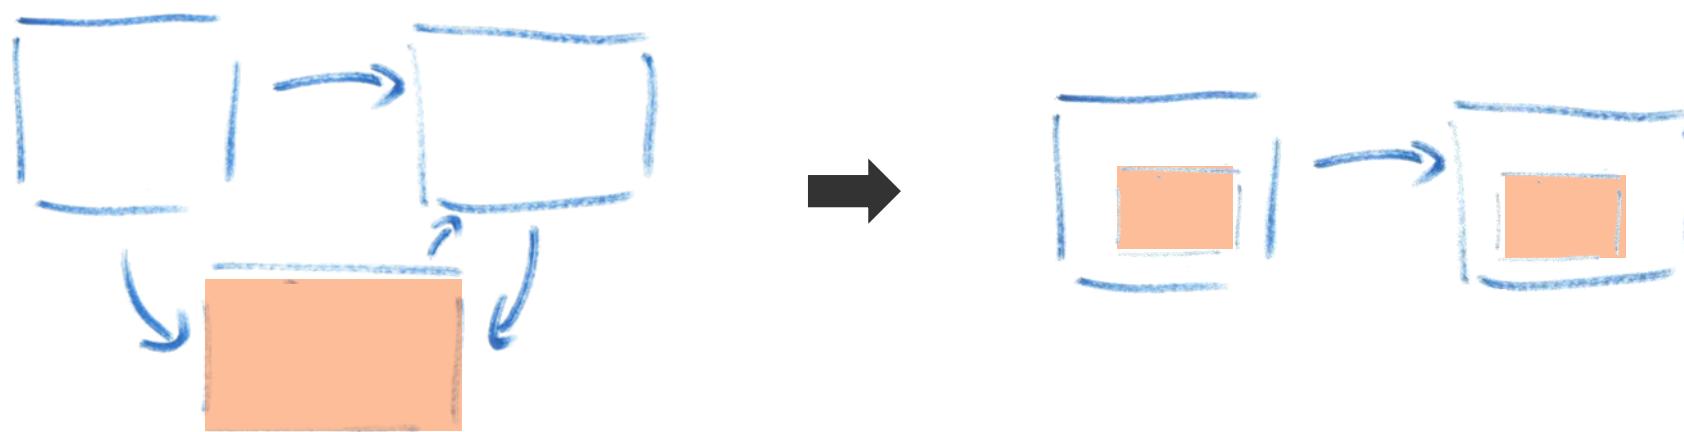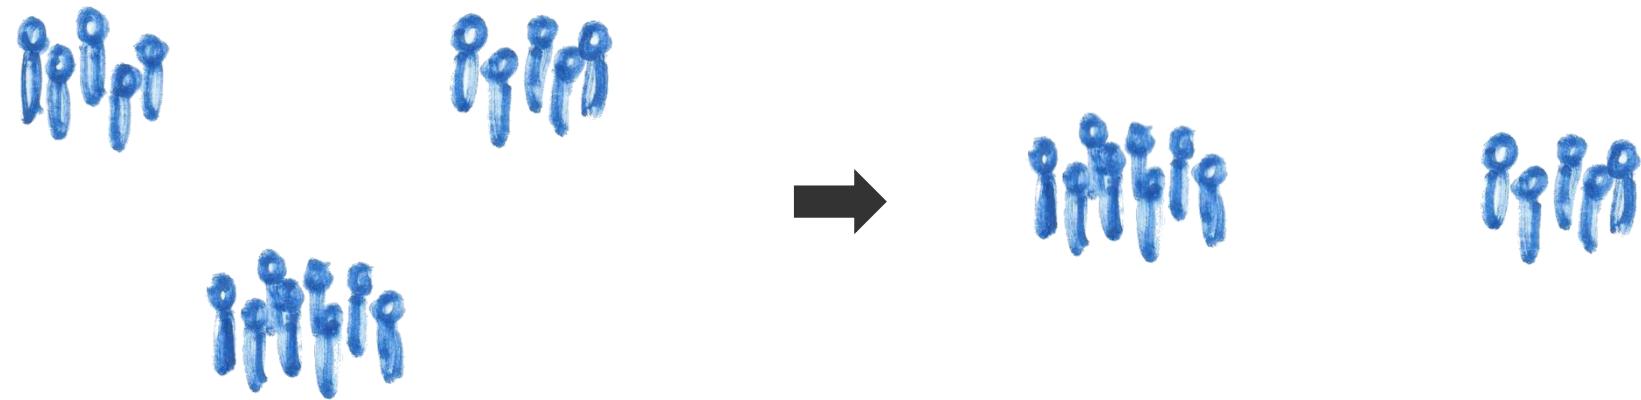

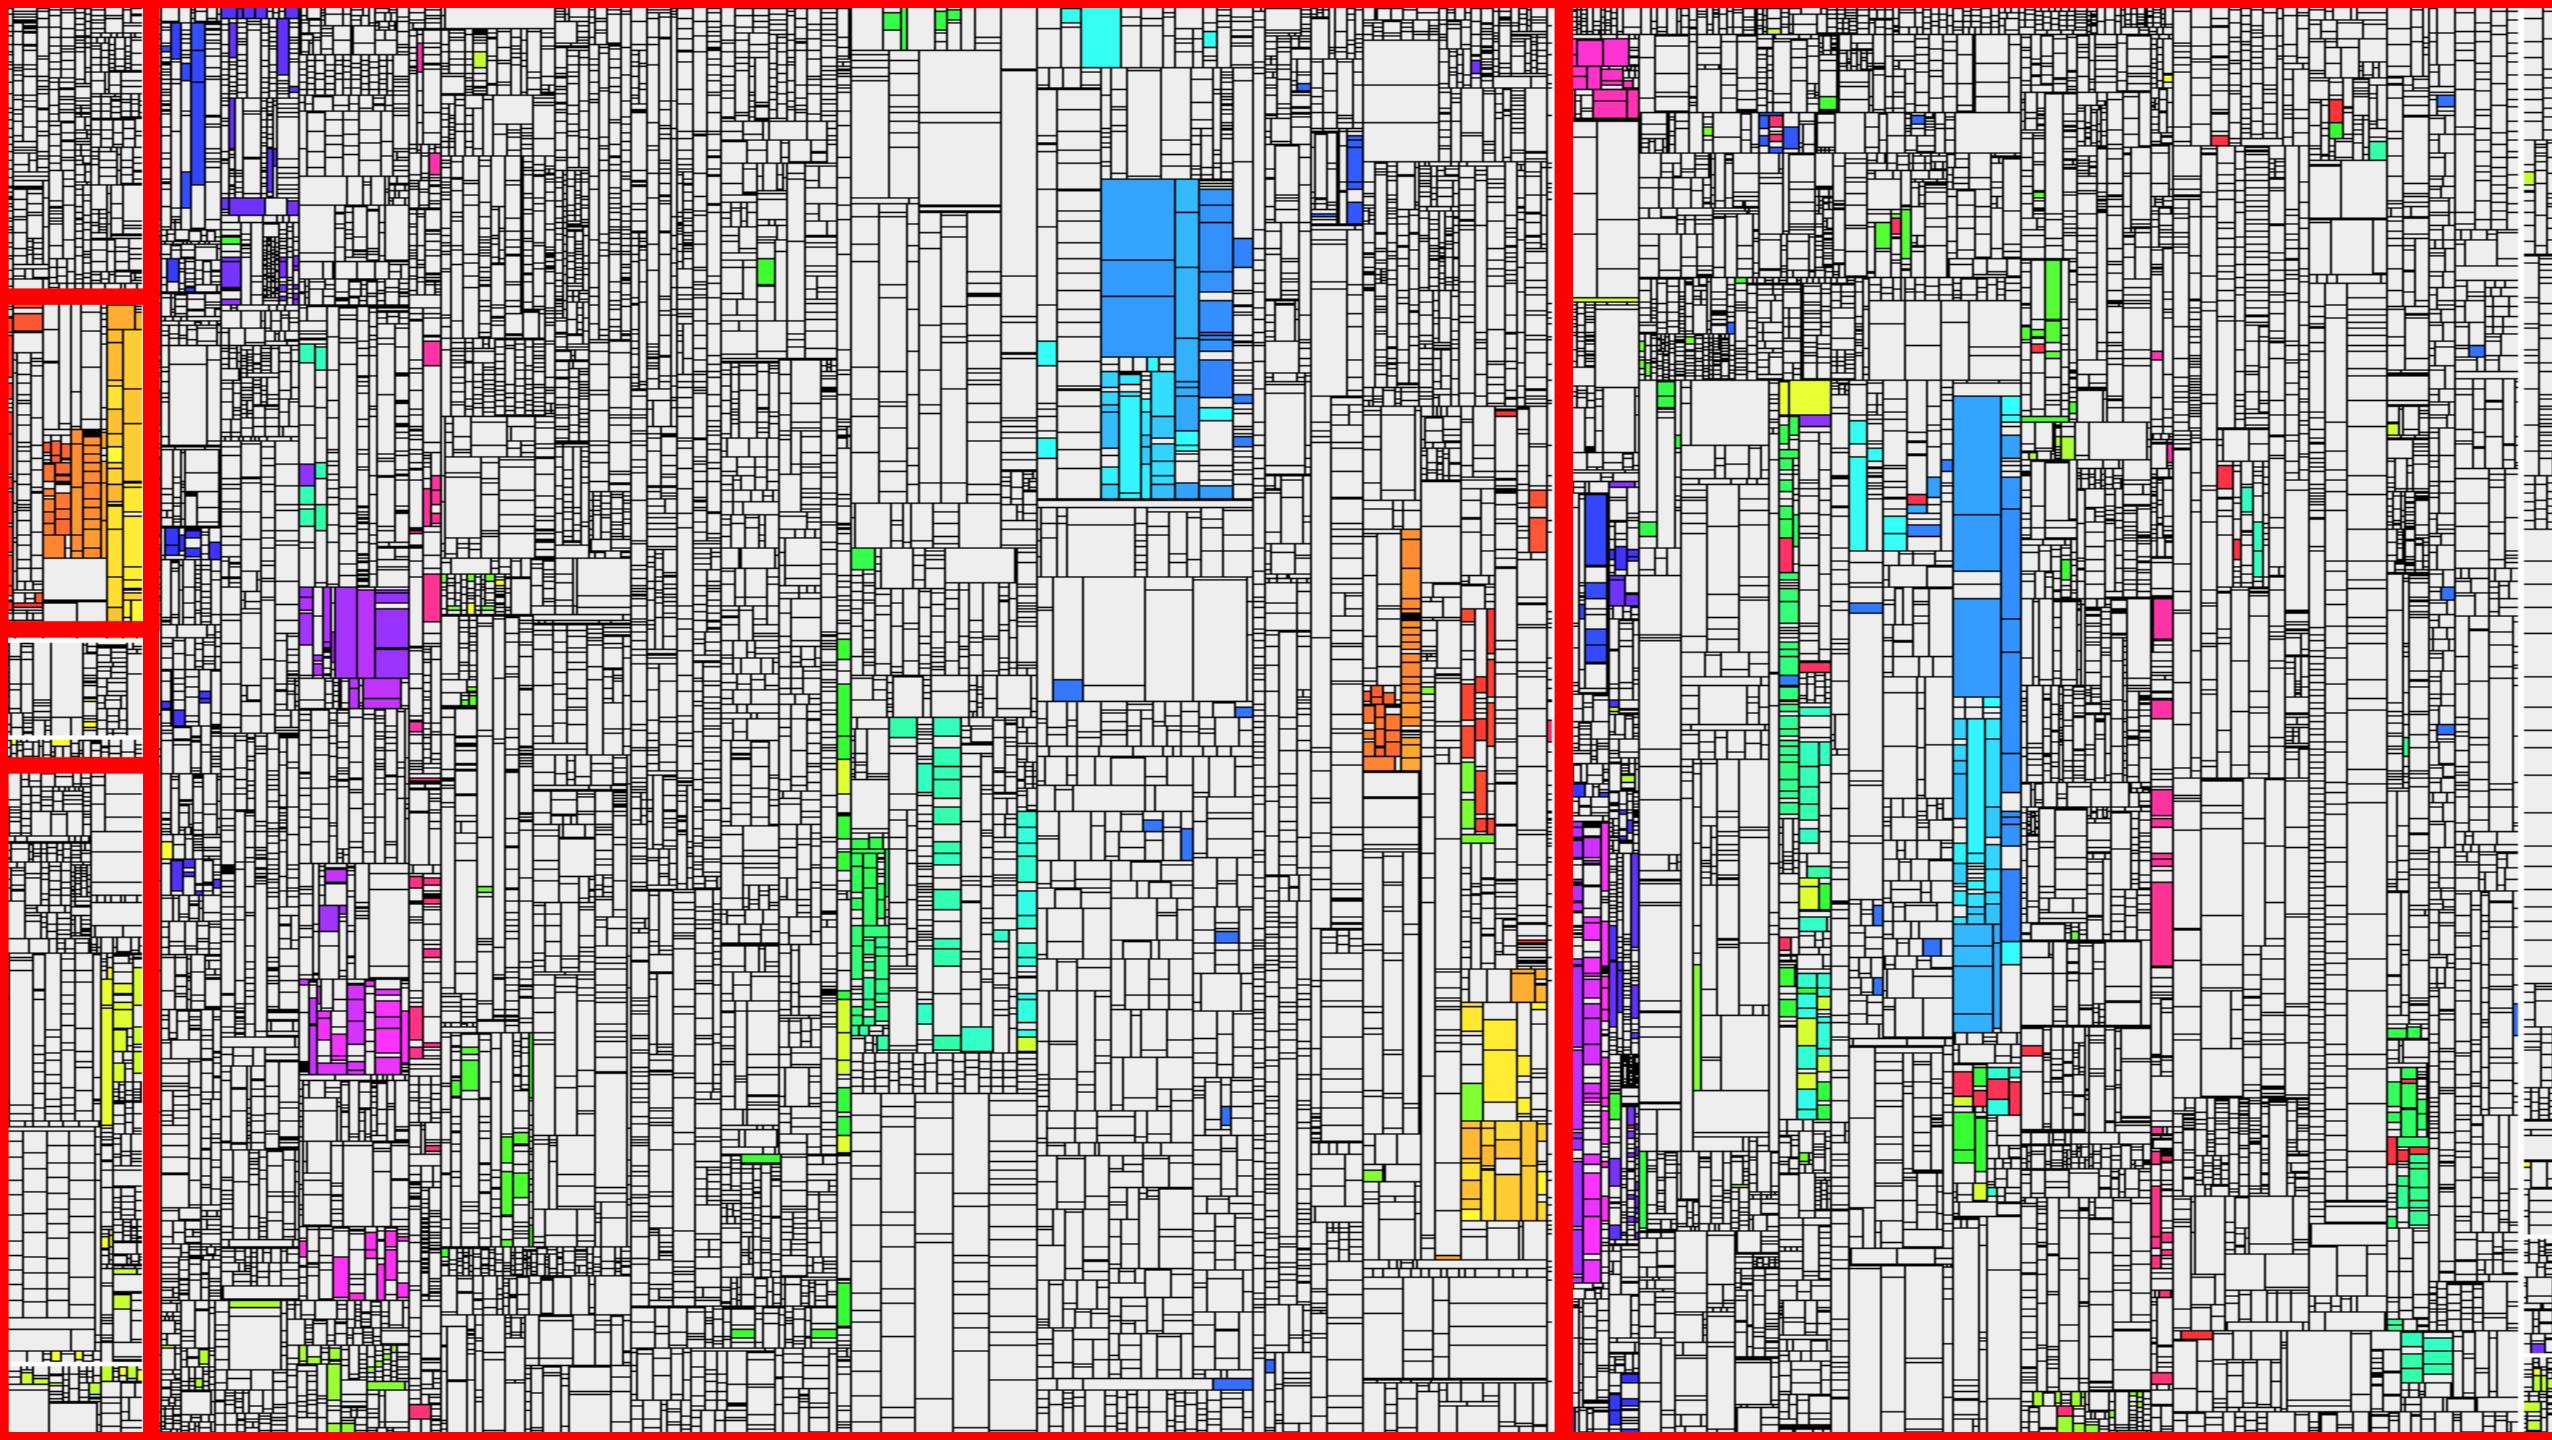

- Dashboard
- Activity
- Findings
- Metrics
- Tests
- Issues
- Tasks
- Architecture
- Delta
- Projects
- System
- # Admin

jenkins/test/src/main/java/org/jvnet/hudson/test/HudsonTestCase.java

(revision 12d96a56...)

```
    if (lhs==null && rhs==null)      return;
    if (lhs==null)      fail("lhs is null while rhs="+rhs);
    if (rhs==null)      fail("rhs is null while lhs="+lhs);

Constructor<?> lc = findDataBoundConstructor(lhs.getClass());
Constructor<?> rc = findDataBoundConstructor(rhs.getClass());
assertEquals("Data bound constructor mismatch. Different type?",lc,rc);

List<String> primitiveProperties = new ArrayList<String>();

String[] names = ClassDescriptor.loadParameterNames(lc);
Class<?>[] types = lc.getParameterTypes();
assertEquals(names.length,types.length);
for (int i=0; i<types.length; i++) {
    Object lv = ReflectionUtils.getPublicProperty(lhs, names[i]);
    Object rv = ReflectionUtils.getPublicProperty(rhs, names[i]);

    if (Iterable.class.isAssignableFrom(types[i])) {
        Iterable lcol = (Iterable) lv;
        Iterable rcol = (Iterable) rv;
        Iterator ltr,rtr;
        for (ltr=lcol.iterator(), rtr=rcol.iterator(); ltr.hasNext() && rtr.hasNext();)
            Object litem = ltr.next();
            Object ritem = rtr.next();

            if (findDataBoundConstructor(litem.getClass())!=null) {
                assertEqualsDataBoundBeans(litem,ritem);
            } else {
                assertEquals(litem,ritem);
            }
        }
        assertFalse("collection size mismatch between "+lhs+" and "+rhs, ltr.hasNext() ^ rtr.hasNext());
    } else
        if (findDataBoundConstructor(types[i])!=null || (lv!=null && findDataBoundConstructo
            // recurse into nested databound objects
            assertEqualsDataBoundBeans(lv,rv);
        } else {
            primitiveProperties.add(names[i]);
        }
}

// compare shallow primitive properties
if (!primitiveProperties.isEmpty())
    assertEqualsBeans(lhs,rhs,Util.join(primitiveProperties,","));

/*
 * Makes sure that two collections are identical via {@link #assertEqualsDataBoundBeans(Object, Object)}
 */
public void assertEqualsDataBoundBeans(List<?> lhs, List<?> rhs) throws Exception {
    assertEquals(lhs.size(), rhs.size());
    for (int i=0; i<lhs.size(); i++)
        assertEquals(lhs.get(i), rhs.get(i));
}
```

jenkins/test/src/main/java/org/jvnet/hudson/test/JenkinsRule.java

(revision 3909f5ac...)

```
    if (lhs==null && rhs==null)      return;
    if (lhs==null)      fail("lhs is null while rhs="+rhs);
    if (rhs==null)      fail("rhs is null while lhs="+lhs);

Constructor<?> lc = findDataBoundConstructor(lhs.getClass());
Constructor<?> rc = findDataBoundConstructor(rhs.getClass());
assertThat("Data bound constructor mismatch. Different type?", (Constructor)rc, is((Constructor)lc));

List<String> primitiveProperties = new ArrayList<String>();

String[] names = ClassDescriptor.loadParameterNames(lc);
Class<?>[] types = lc.getParameterTypes();
assertThat(types.length, is(names.length));
for (int i=0; i<types.length; i++) {
    Object lv = ReflectionUtils.getPublicProperty(lhs, names[i]);
    Object rv = ReflectionUtils.getPublicProperty(rhs, names[i]);

    if (lv != null && rv != null && Iterable.class.isAssignableFrom(types[i])) {
        Iterable lcol = (Iterable) lv;
        Iterable rcol = (Iterable) rv;
        Iterator ltr,rtr;
        for (ltr=lcol.iterator(), rtr=rcol.iterator(); ltr.hasNext() && rtr.hasNext();)
            Object litem = ltr.next();
            Object ritem = rtr.next();

            if (findDataBoundConstructor(litem.getClass())!=null) {
                assertEqualsDataBoundBeans(litem,ritem);
            } else {
                assertThat(ritem, is(litem));
            }
        }
        assertThat("collection size mismatch between " + lhs + " and " + rhs, ltr.hasNext()
            is(false));
    } else
        if (findDataBoundConstructor(types[i])!=null || (lv!=null && findDataBoundConstructo
            // recurse into nested databound objects
            assertEqualsDataBoundBeans(lv,rv);
        } else {
            primitiveProperties.add(names[i]);
        }
}

// compare shallow primitive properties
if (!primitiveProperties.isEmpty())
    assertEqualsBeans(lhs,rhs,Util.join(primitiveProperties,","));

/*
 * Makes sure that two collections are identical via {@link #assertEqualsDataBoundBeans(Object, Object)}
 */
public void assertEqualsDataBoundBeans(List<?> lhs, List<?> rhs) throws Exception {
    assertEquals(lhs.size(), rhs.size());
    for (int i=0; i<lhs.size(); i++)
        assertEquals(lhs.get(i), rhs.get(i));
}
```



fixed: latest change is no longer lost when assigning entry to a keyword group while it is being edited

by jzieren in revision [e0ca9a51b50c8b01f579f4eef79028bff6c34028](#) (git)

May 26 2005
15:58

01 alerts:

Message

Found potential inconsistent clone change in RightClickMenu.java

Context

[Broken clone] [Old clone finding] [Code change]

✓2 removed findings:

Message

Clone with 2 instances of length 10

Location

[src/java/net/sf/.../RightClickMenu.java:366-380](#)

Finding Group


Clone with 2 instances of length 10

[src/java/net/sf/.../RightClickMenu.java:340-354](#)

Code Duplication / Cloning


Code Duplication / Cloning

Software ist mehr als Code

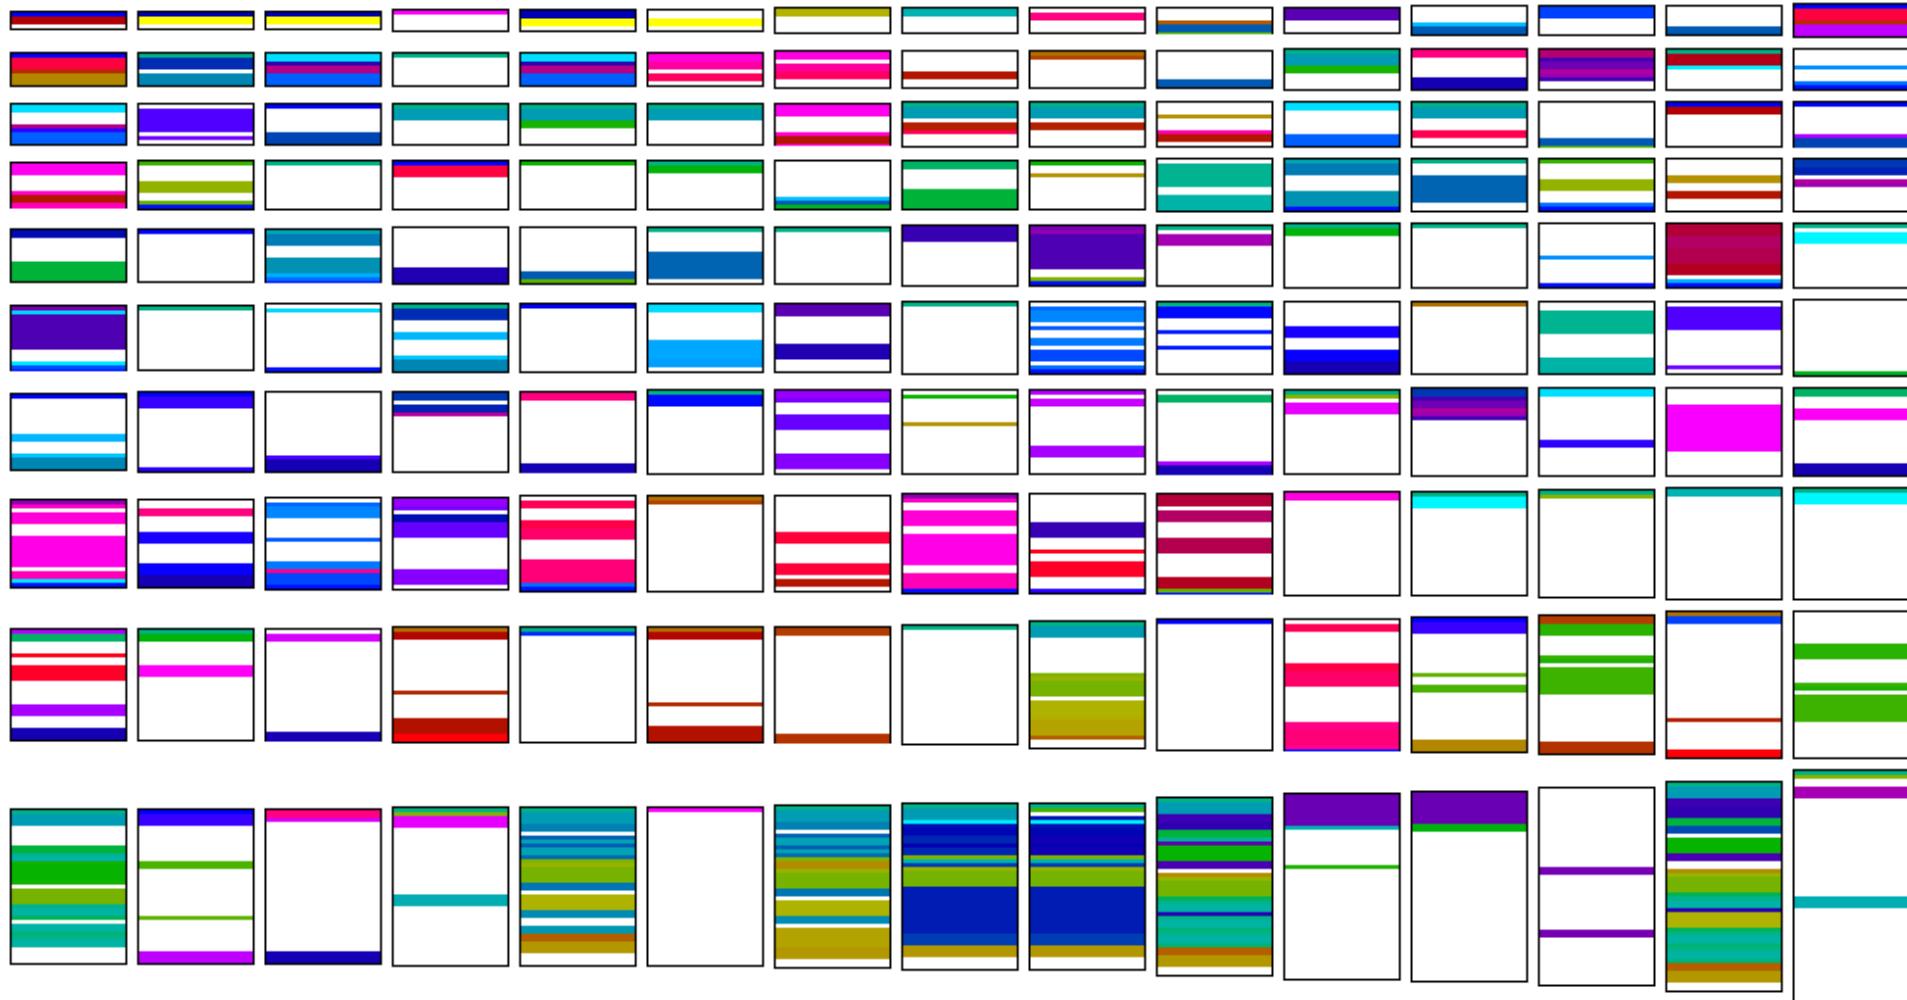


176 use cases in total, 150 contain cloning

Spec	Pages	Words	Clone cov.	Clone groups	Clones	Blow-up relative	Blow-up words
A	517	41,482	35.0%	259	914	32.6%	10,191
B	1,013	130,968	8.9%	265	639	5.3%	6,639
C	133	18,447	18.5%	37	88	11.5%	1,907
D	241	37,969	8.1%	105	479	6.9%	2,463
E	185	37,056	0.9%	6	12	0.4%	161
F	42	7,662	51.1%	50	162	60.6%	2,890
<hr/>							
H	160	19,632	71.6%	71	360	129.6%	11,083
X	158	19,679	12.4%	21	45	6.8%	1,253
Y	235	49,425	21.9%	181	553	18.2%	7,593
Z	-	13,807	19.6%	50	117	14.2%	1,718
AB	3,100	274,489	12.1%	635	1818	8.7%	21,993
AC	696	81,410	5.4%	65	148	3.2%	2,549
Avg			13.6%			13.5%	
Σ	8,667	1,242,765		2,631	7,669		100,178

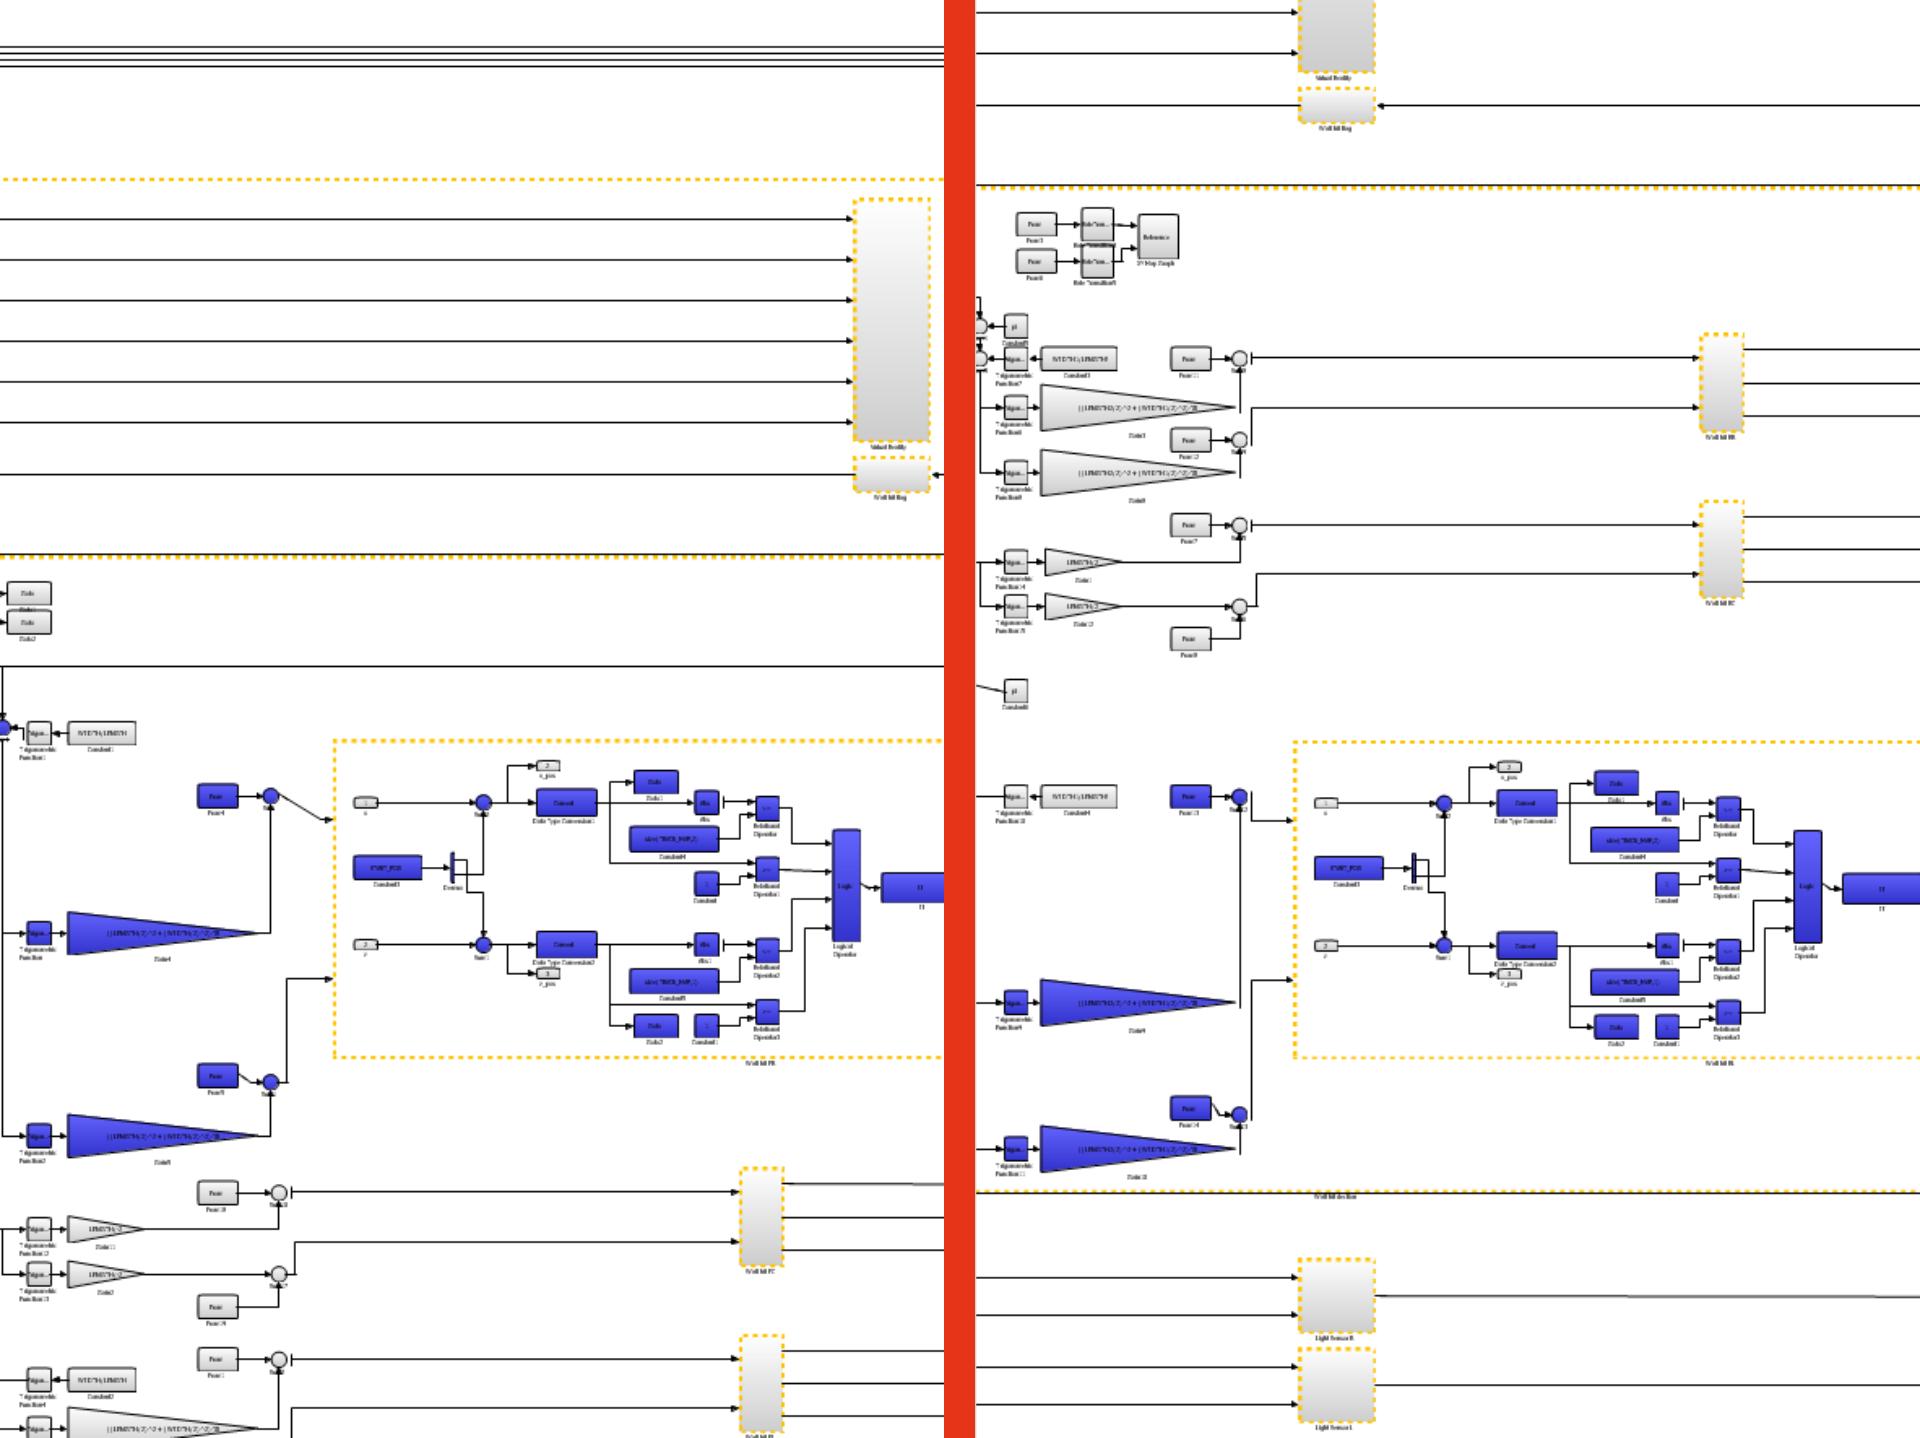

	System under Test	Test Suite	
		# Tests	
System A	330 kLoC	266	
System B	580 kLoC	1,059	
System C	150 kLoC	72	
System D	430 kLoC	180	
System E	760 kLoC	1,804	
System F	1,400 kLoC	135	
System G	160 kLoC	605	

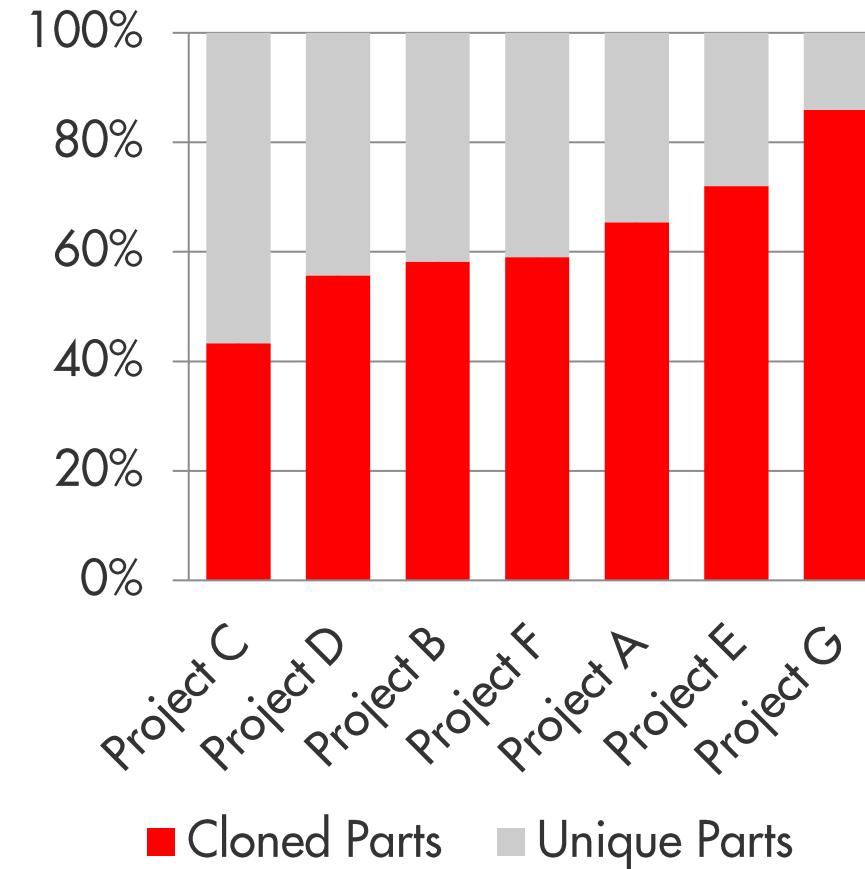

Evolution von Produktlinien


Product1

Product 2

Product 3


Product 4

Product 5

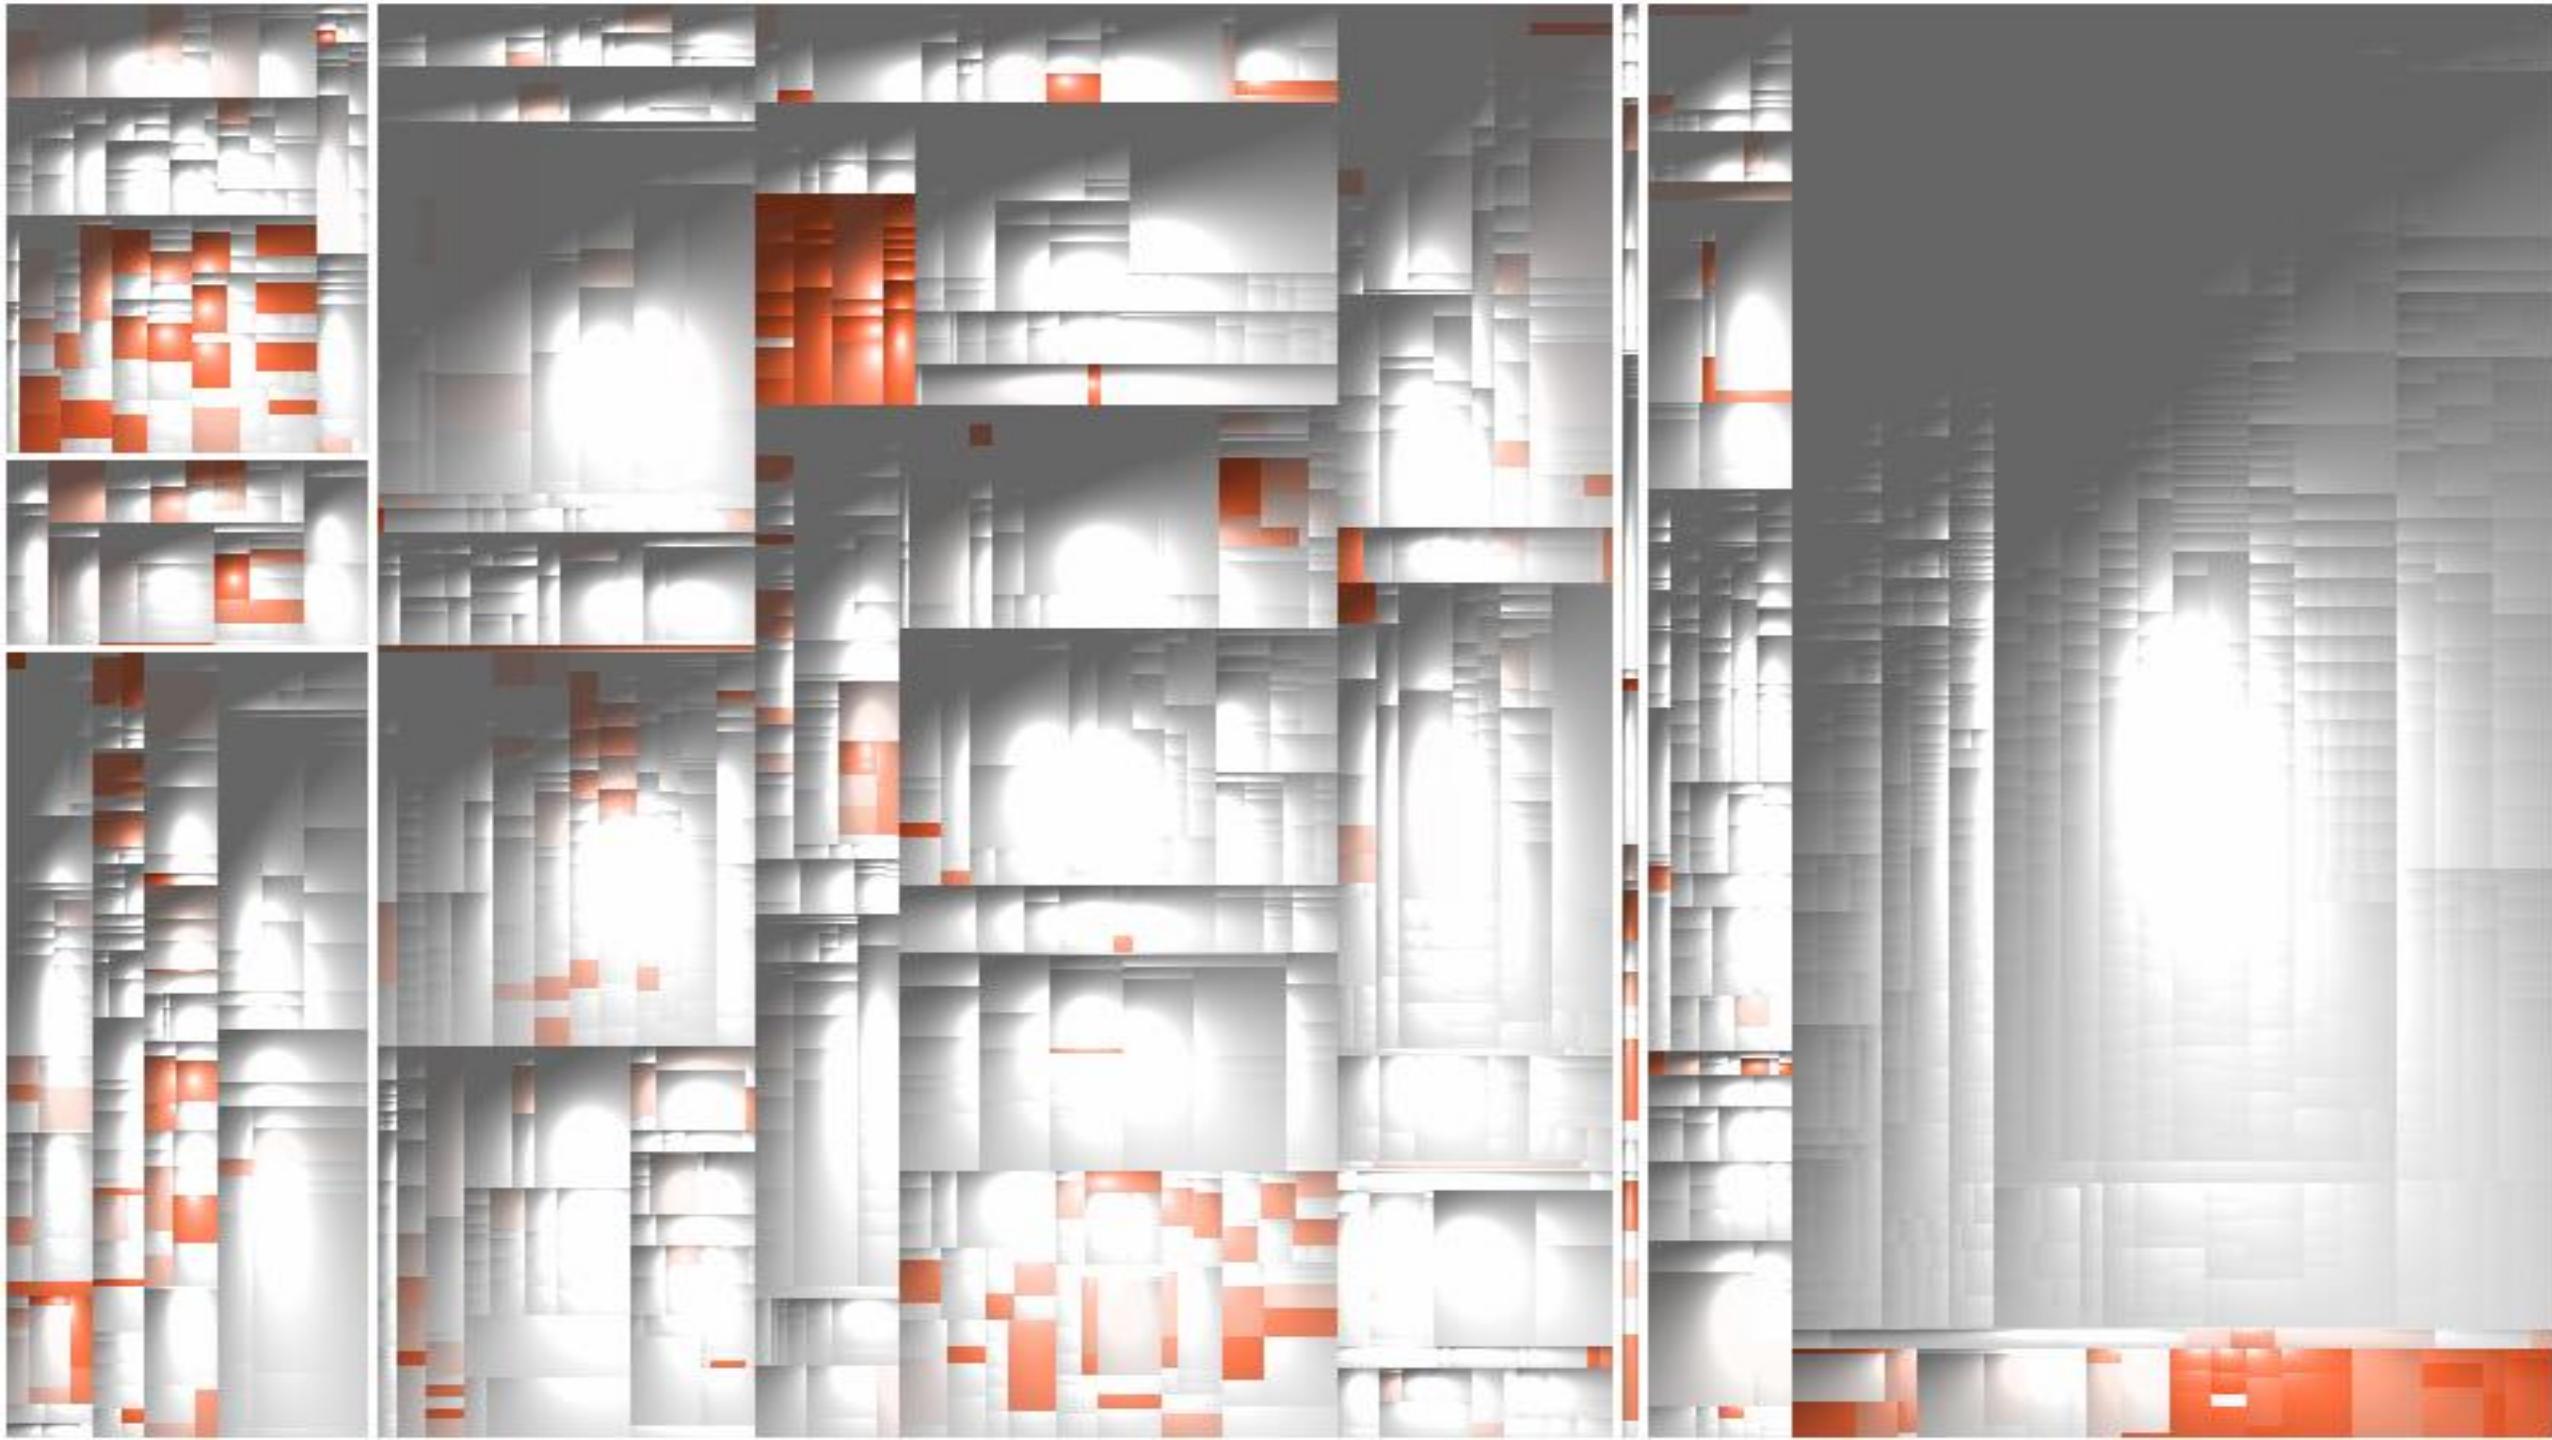

[REDACTED]

[REDACTED]

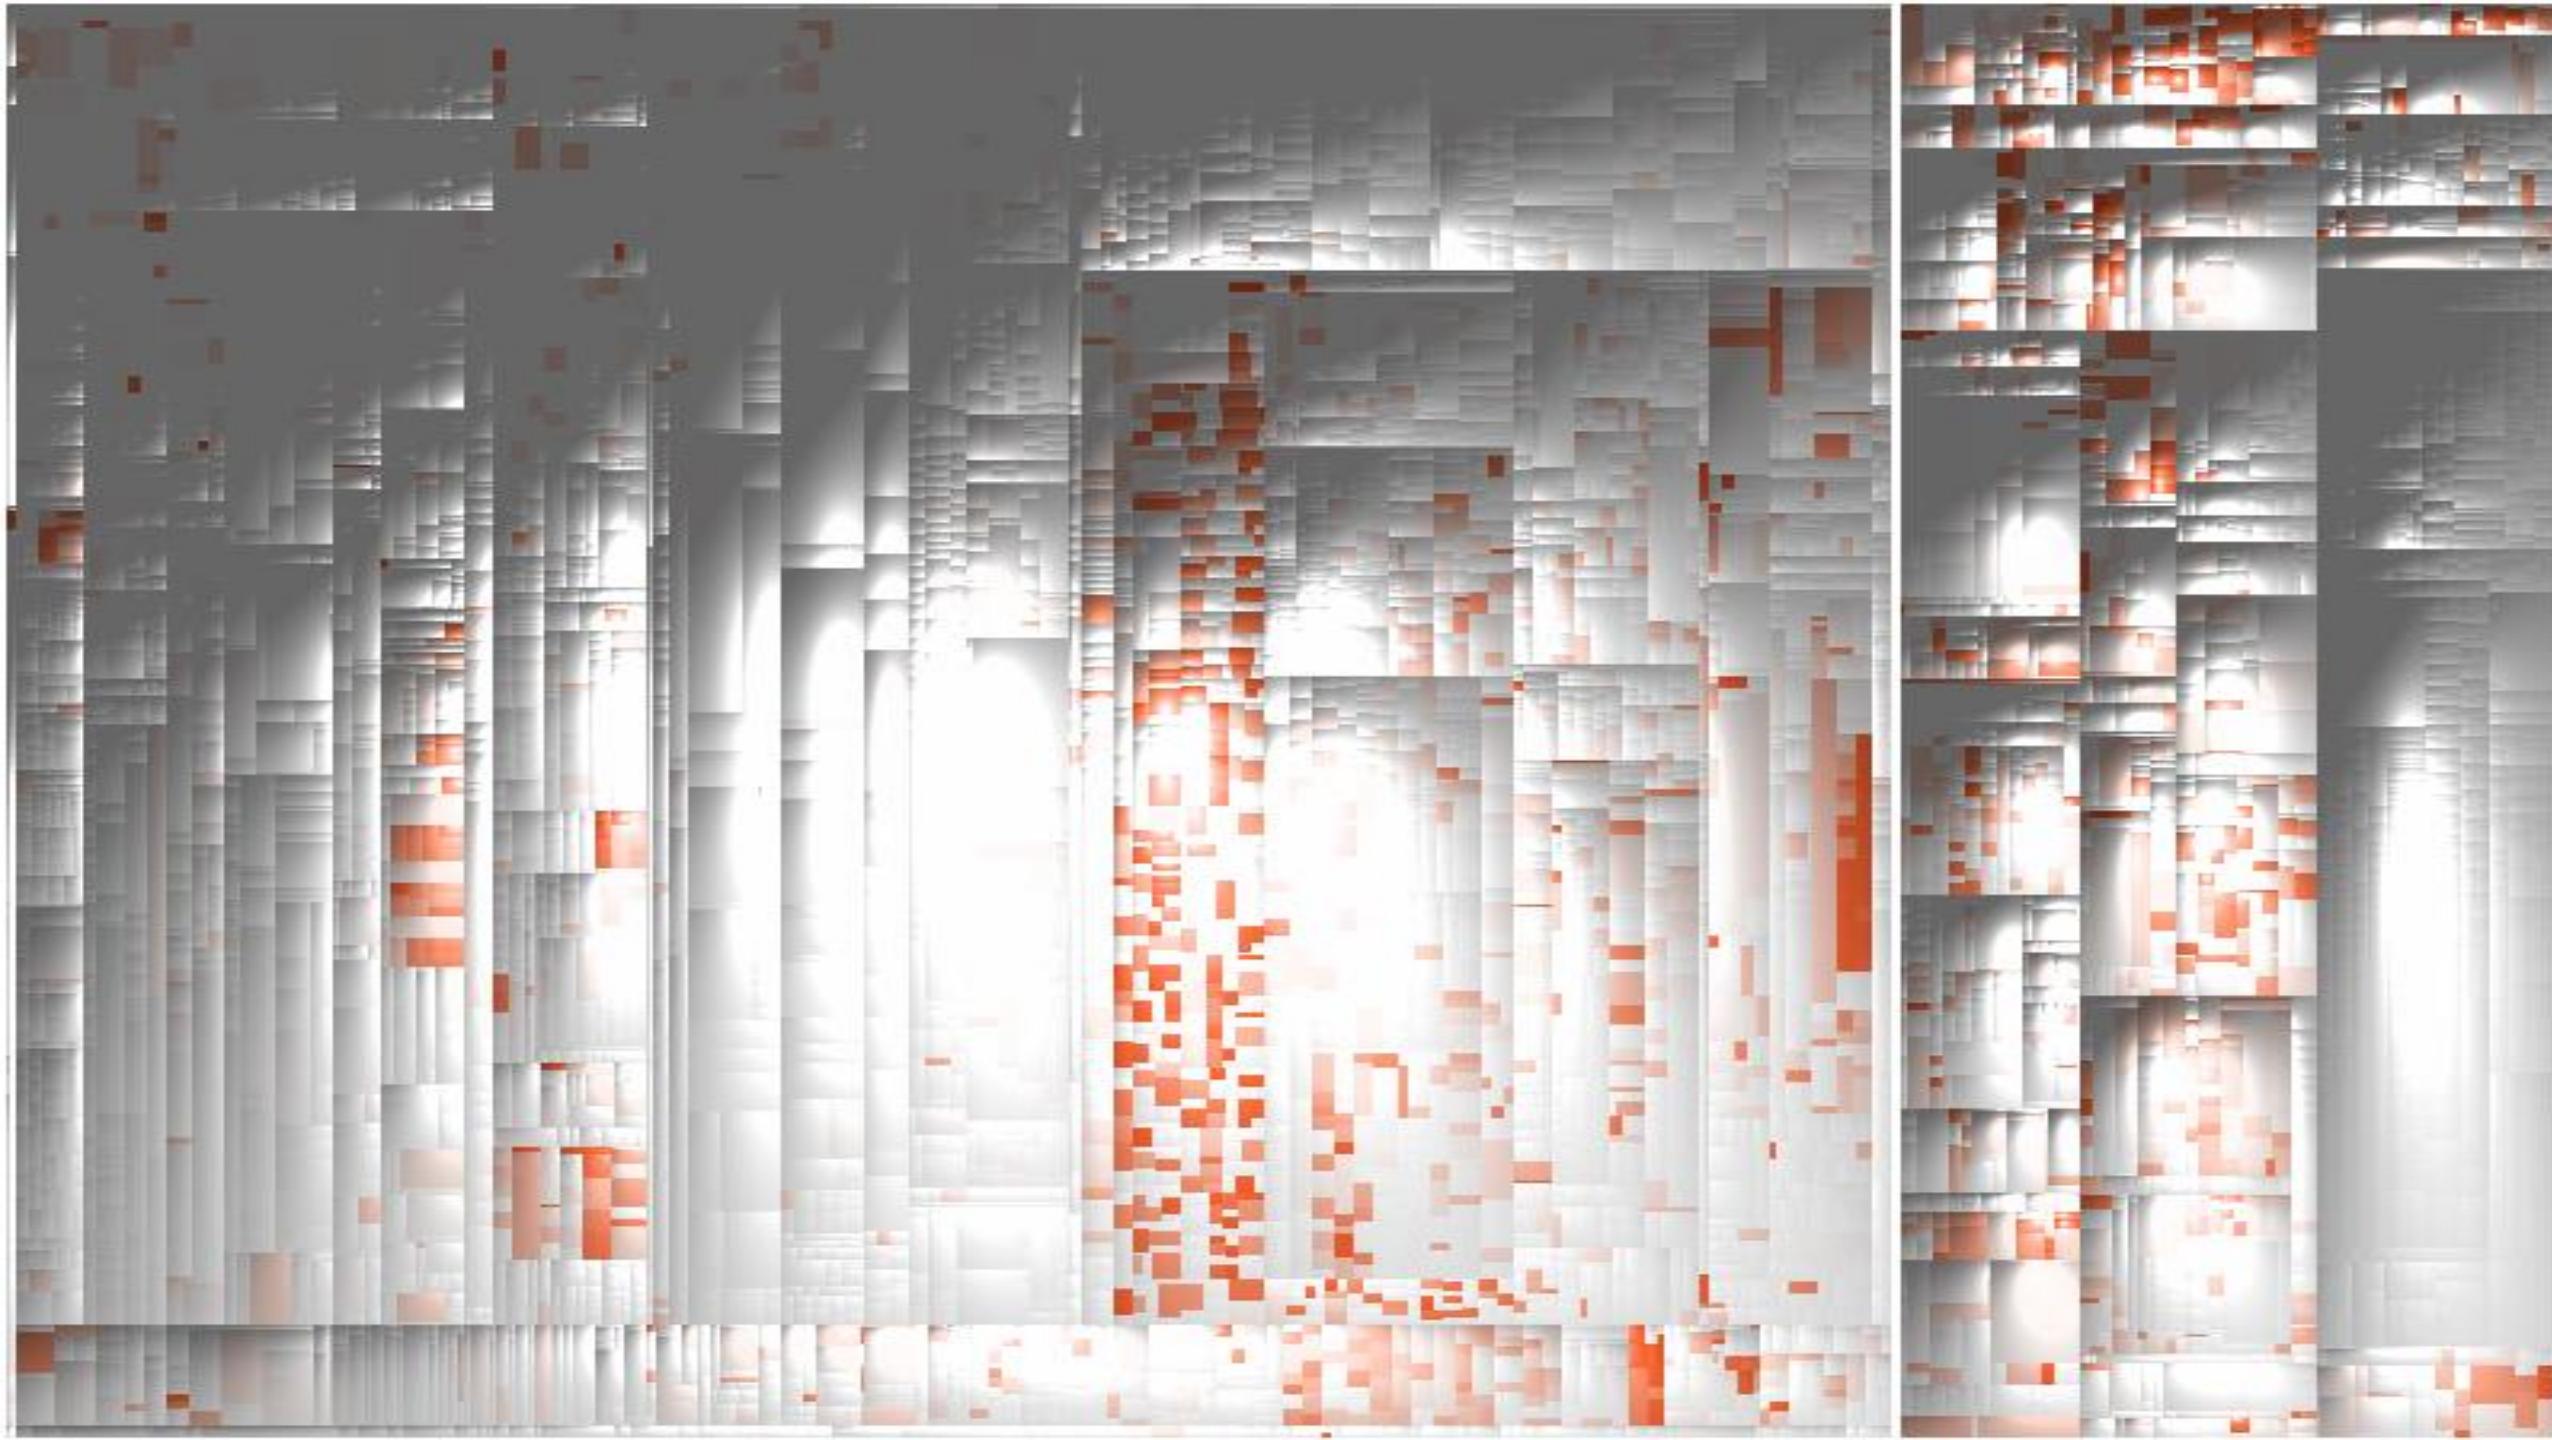

**Die Munich Re setzt
Clone Detection seit ca.
10 Jahren ein.**

Wie sähe es ohne aus?

Continuous Software Quality Control in Practice

Daniela Steidl*, Florian Deissenboeck*, Martin Poehlmann*, Robert Heinke†, Bärbel Uhink-Mergenthaler‡
* CQSE GmbH, Garching b. München, Germany
† Munich RE, München, Germany

Abstract—Many companies struggle with unexpectedly high maintenance costs for their software development which are often caused by insufficient code quality. Although companies often use static analyses tools, they do not derive consequences from the metric results and, hence, the code quality does not actually improve. We provide an experience report of the quality consulting company CQSE, and show how code quality can be improved in practice: we revise our former expectations on quality control from [1] and propose an enhanced continuous quality control process which requires the combination of metrics, manual action, and a close cooperation between quality engineers, developers, and managers. We show the applicability of our approach with a case study on 41 systems of Munich RE and demonstrate its impact.

1. INTRODUCTION

Software systems evolve over time and are often maintained for decades. Without effective counter measures, the quality of software systems gradually decays [2], [3] and maintenance costs increase. To avoid quality decay, *continuous quality control* is necessary during development and later maintenance [1]: for us, quality control comprises all activities to monitor the system's current quality status and to ensure that the quality meets the quality goal (defined by the principal who outsourced the software development or the development team itself).

Research has proposed various metrics to assess software quality, including structural metrics¹ or code duplication, and has led to a massive development of analysis tools [4]. Much of current research focuses on better metrics and better tools [1], and mature tools such as ConQAT [5], Teamscale [6], or Sonar² have been available for several years.

In [1], we briefly illustrated how tools should be combined with manual reviews to improve software quality continuously, see Figure 1: We perceived quality control as a simple, continuous feedback loop in which metric results and manual reviews are used to assess software quality. A quality engineer – a representative of the quality control group – provides feedback to the developers based on the differences between the current and the desired quality. However, we underestimated the amount of required manual action to create an impact. Within five years of experience as software quality consultants in different domains (insurance companies, automotive manufacturers, or engineering companies), we frequently experienced that tool



Fig. 1. The former understanding of a quality control process

support alone is not sufficient for successful quality control in practice. We have seen that most companies cannot create an impact on their code quality although they employ tools for quality measurements because the pressure to implement new features does not allow time for quality assurance: often, newly introduced tools get attention only for a short period of time, and are then forgotten. Based on our experience, quality control requires actions beyond tool support.

In this paper, we revise our view on quality control from [1] and propose an enhanced quality control process. The enhanced process combines automatic static analyses with a significantly larger amount of manual action than previously assumed to be necessary. Metrics constitute the basis but quality engineers must manually interpret metric results within their context and turn them into actionable refactoring tasks for the developers. We demonstrate the success and practicability of our process with a running case study with Munich RE which contains 32 .NET and 9 SAP systems.

II. TERMS AND DEFINITIONS

- A *quality criterion* comprises a metric and a threshold to evaluate the metric. A criterion can be, e.g., to have a clone coverage below 10% or to have at most 30% code in long methods (e.g., methods with more than 40 LoC).
- *(Quality) Findings* result from a violation of a metric threshold (e.g., a long method) or from the result of a static code analysis (e.g., a code clone).
- *Quality goals* describe the abstract goal of the process and provide a strategy how to deal with new and existing findings during further development: The highest goal is to have no findings at all, i.e., all findings must be removed immediately. Another goal is to avoid new findings, i.e., existing findings are tolerated but new findings must not be introduced. (III-B will provide more information).

III. THE ENHANCED QUALITY CONTROL PROCESS

Our quality control process is designed to be transparent (all stakeholders involved agree on the goal and consequences

must clearly specify other company's needs, but

QSE site. spers hone the seeds. uality

sting dings dy). oide – thout ment souwys [7]). dings

under

ogies com- ding ment. teria code ngth, cture lines teria ancy, and

However, cooperation in 2006, in average had

in the history face, although Teamscale to

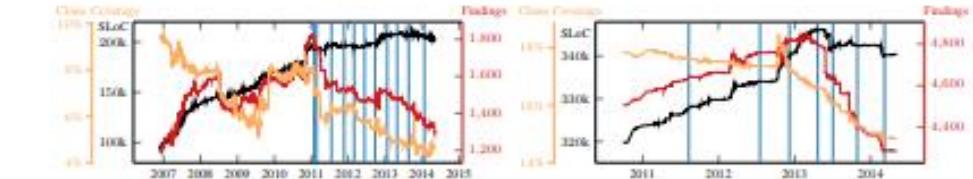


Fig. 3. System A

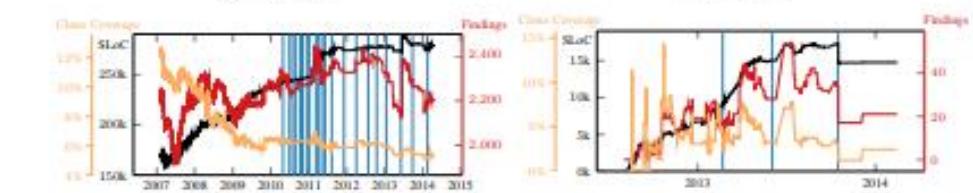


Fig. 4. System B



Fig. 5. System C



Fig. 6. System D

continuously in the available history (Figure 4). The number of findings, however, increases until mid 2012. In 2012, the project switched from QG2 to QG3. After this change, the number of findings decreases and the clone coverage settles around 6%, which is a success of the quality control. The major increase in the number of findings in 2013 is only due to an automated code refactoring introducing braces that led to threshold violations of few hundred methods. After this increase, the number of findings start decreasing again, showing the manual effort of the developers to remove findings.

For System C (Figure 5), the quality control process shows a significant impact after two years: Since the end of 2012, when the project also switched from QG2 to QG3, both the clone coverage and the overall number of findings decline. In the year before, the project transitioned between development teams and, hence, we only wrote two reports (July 2011 and July 2012).

System D (Figure 6) almost fulfills QG4 as after 1 year of development, it has only 21 findings in total and a clone coverage of 2.5%. Technically, under QG4, the system should have zero findings. However, in practice, exactly zero findings is not feasible as there are always some findings (e.g., a long method to create UI objects or clones in test code) that are not a major threat to maintainability. Only a human can judge based on manual inspection of the findings whether a system still fulfills QG4, if it does not have exactly zero findings. In the case of System D, we consider 21 findings to be few and minor enough to fulfill QG4.

To summarize, our trends show that our process leads to actual measurable quality improvement. Those trends go beyond anecdotal evidence but are not sufficient to scientifically proof our method. However, Munich RE decided only recently to extend our quality control from the .NET area to all SAP

V. CONCLUSION

Quality analyses must not be solely based on automated measurements, but need to be combined with a significant amount of human evaluation and interaction. Based on our experience, we proposed a new quality control process for which we provided a running case study of 41 industry projects. With a qualitative impact analysis at Munich RE we showed measurable, long-term quality improvements. Our process has led to measurable quality improvement and an increased maintenance awareness up to management level at Munich RE.

REFERENCES

- [1] F. Deissenboeck, E. Jürgen, B. Hinsen, S. Wagner, B. M. y Parada, and M. Pütz, "Tool support for continuous quality control," in *IEEE Software*, 2008.
- [2] D. L. Parnas, "Software aging," in *ACSE '94*.
- [3] S. G. Eick, T. L. Graves, A. P. Kart, J. S. Marron, and A. Mackie, "Does code decay? Assessing the evidence from change management data," *IEEE Trans. Software Eng.*, 2001.
- [4] P. Johnson, "Requirement and design trade-offs in hacking: An in-process software engineering measurement and analysis system," in *ESEM'07*.
- [5] F. Deissenboeck, M. Pütz, and T. Seifert, "Tool support for continuous quality assessment," in *STEP'05*.
- [6] L. Hettema, B. Hinsen, and D. Steidl, "Teamscale: Software quality control in real-time," in *ICSME'14*.
- [7] R. C. Martin, *Clean Code: A Handbook of Agile Software Craftsmanship*, 2008.

This work was partially funded by the German Federal Ministry of Education and Research (BMBF), grant EcoCon, 01IS12034A. The responsibility for this article lies with the authors.

¹e.g., file size, method length, or nesting depth

²<http://www.sonarsource.org/>

Findings

<input checked="" type="checkbox"/> All	6793
<input checked="" type="checkbox"/> Architecture	1
<input checked="" type="checkbox"/> Architecture Conformance	1
<input checked="" type="checkbox"/> Code Anomalies	1344
<input checked="" type="checkbox"/> Bad practice	971
<input checked="" type="checkbox"/> Correctness	2
<input checked="" type="checkbox"/> Exception Handling	62
<input checked="" type="checkbox"/> General checks (built-in)	120
<input checked="" type="checkbox"/> Null pointer dereference	13
<input checked="" type="checkbox"/> Performance	36
<input checked="" type="checkbox"/> Unused code	93
<input checked="" type="checkbox"/> Unused variable or parameter	47
<input checked="" type="checkbox"/> Code Duplication	988
<input checked="" type="checkbox"/> Cloning	101
<input checked="" type="checkbox"/> Redundant Literals	887
<input checked="" type="checkbox"/> Documentation	3378
<input checked="" type="checkbox"/> Comment completeness	3236
<input checked="" type="checkbox"/> Task tags	142
<input checked="" type="checkbox"/> Formatting	6
<input checked="" type="checkbox"/> Code formatting	6
<input checked="" type="checkbox"/> Naming	110
<input checked="" type="checkbox"/> Java naming conventions	110
<input checked="" type="checkbox"/> Structure	966
<input checked="" type="checkbox"/> File Size	38
<input checked="" type="checkbox"/> Method Length	278
<input checked="" type="checkbox"/> Nesting Depth	650


500 $\frac{PT}{Jahr}$


Munich Re spart durch Einsatz von Clone Management jährlich ca. 500 PT Aufwand für Fehlerbehebung

Ersparnis Aufwand = 6%


Munich Re spart durch Einsatz von Clone Detection jährlich 6% Aufwand durch vermiedene Redundanz ein.

Wie ausprobieren?

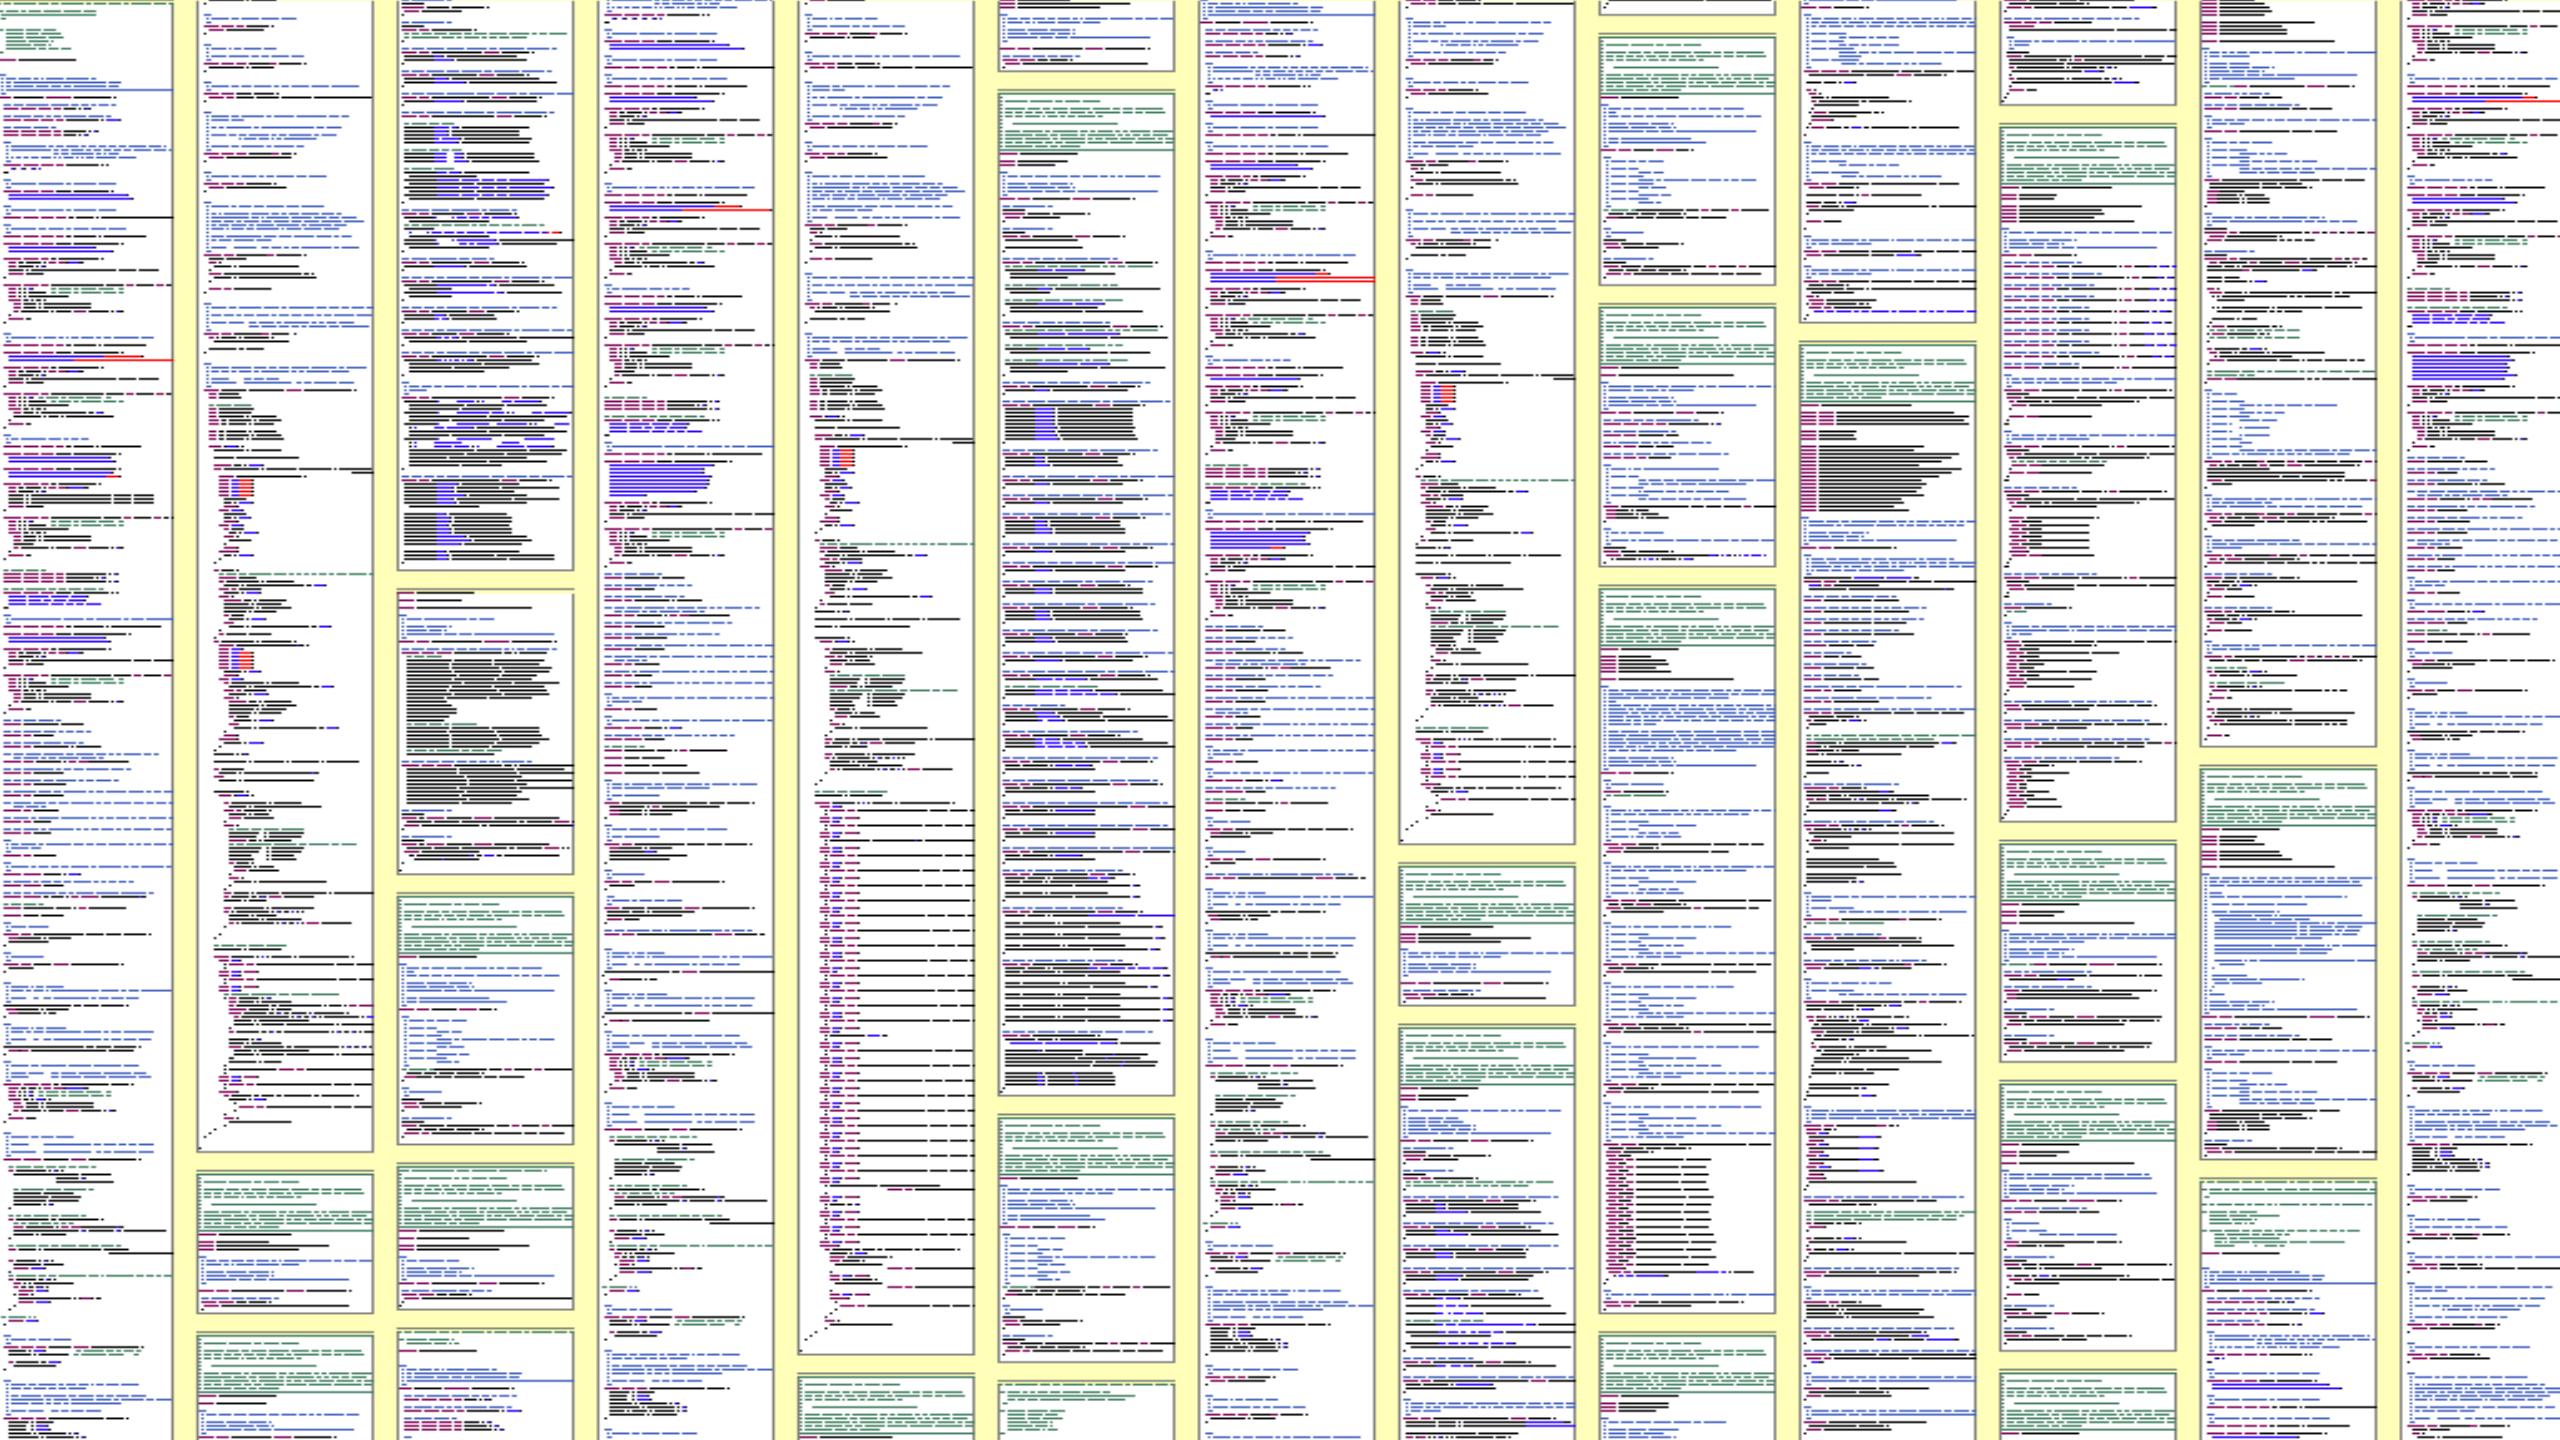

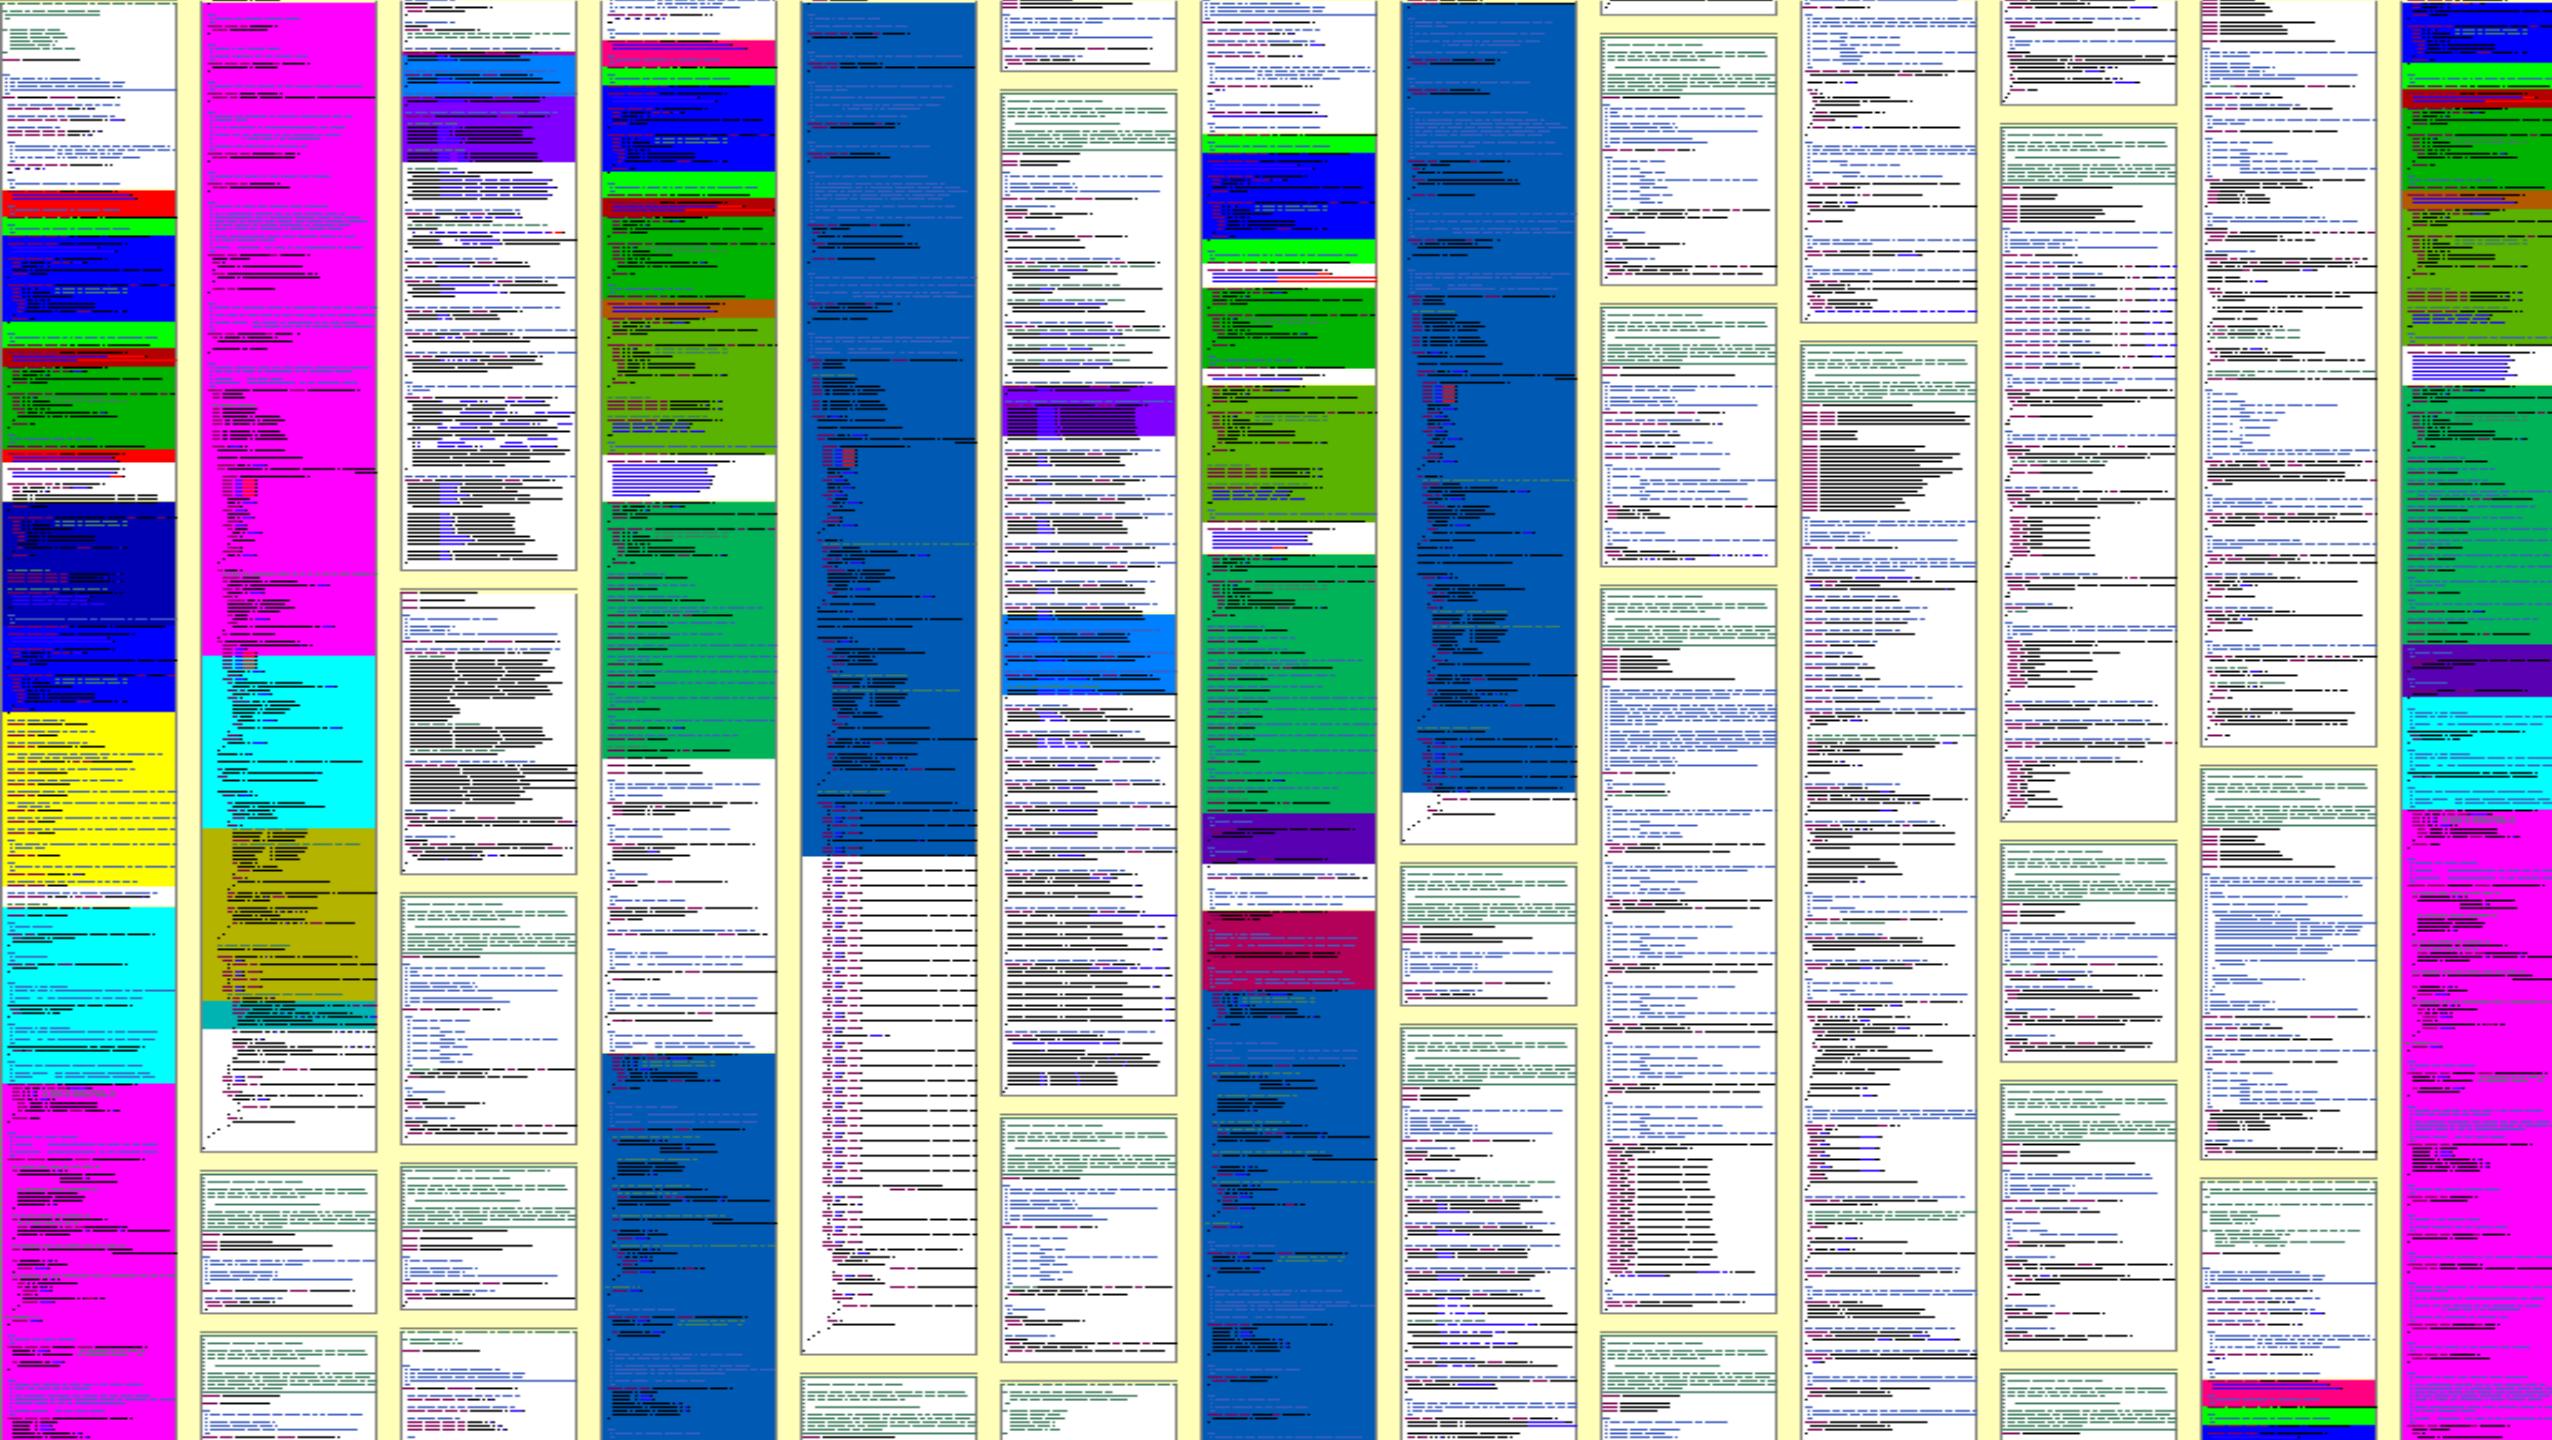



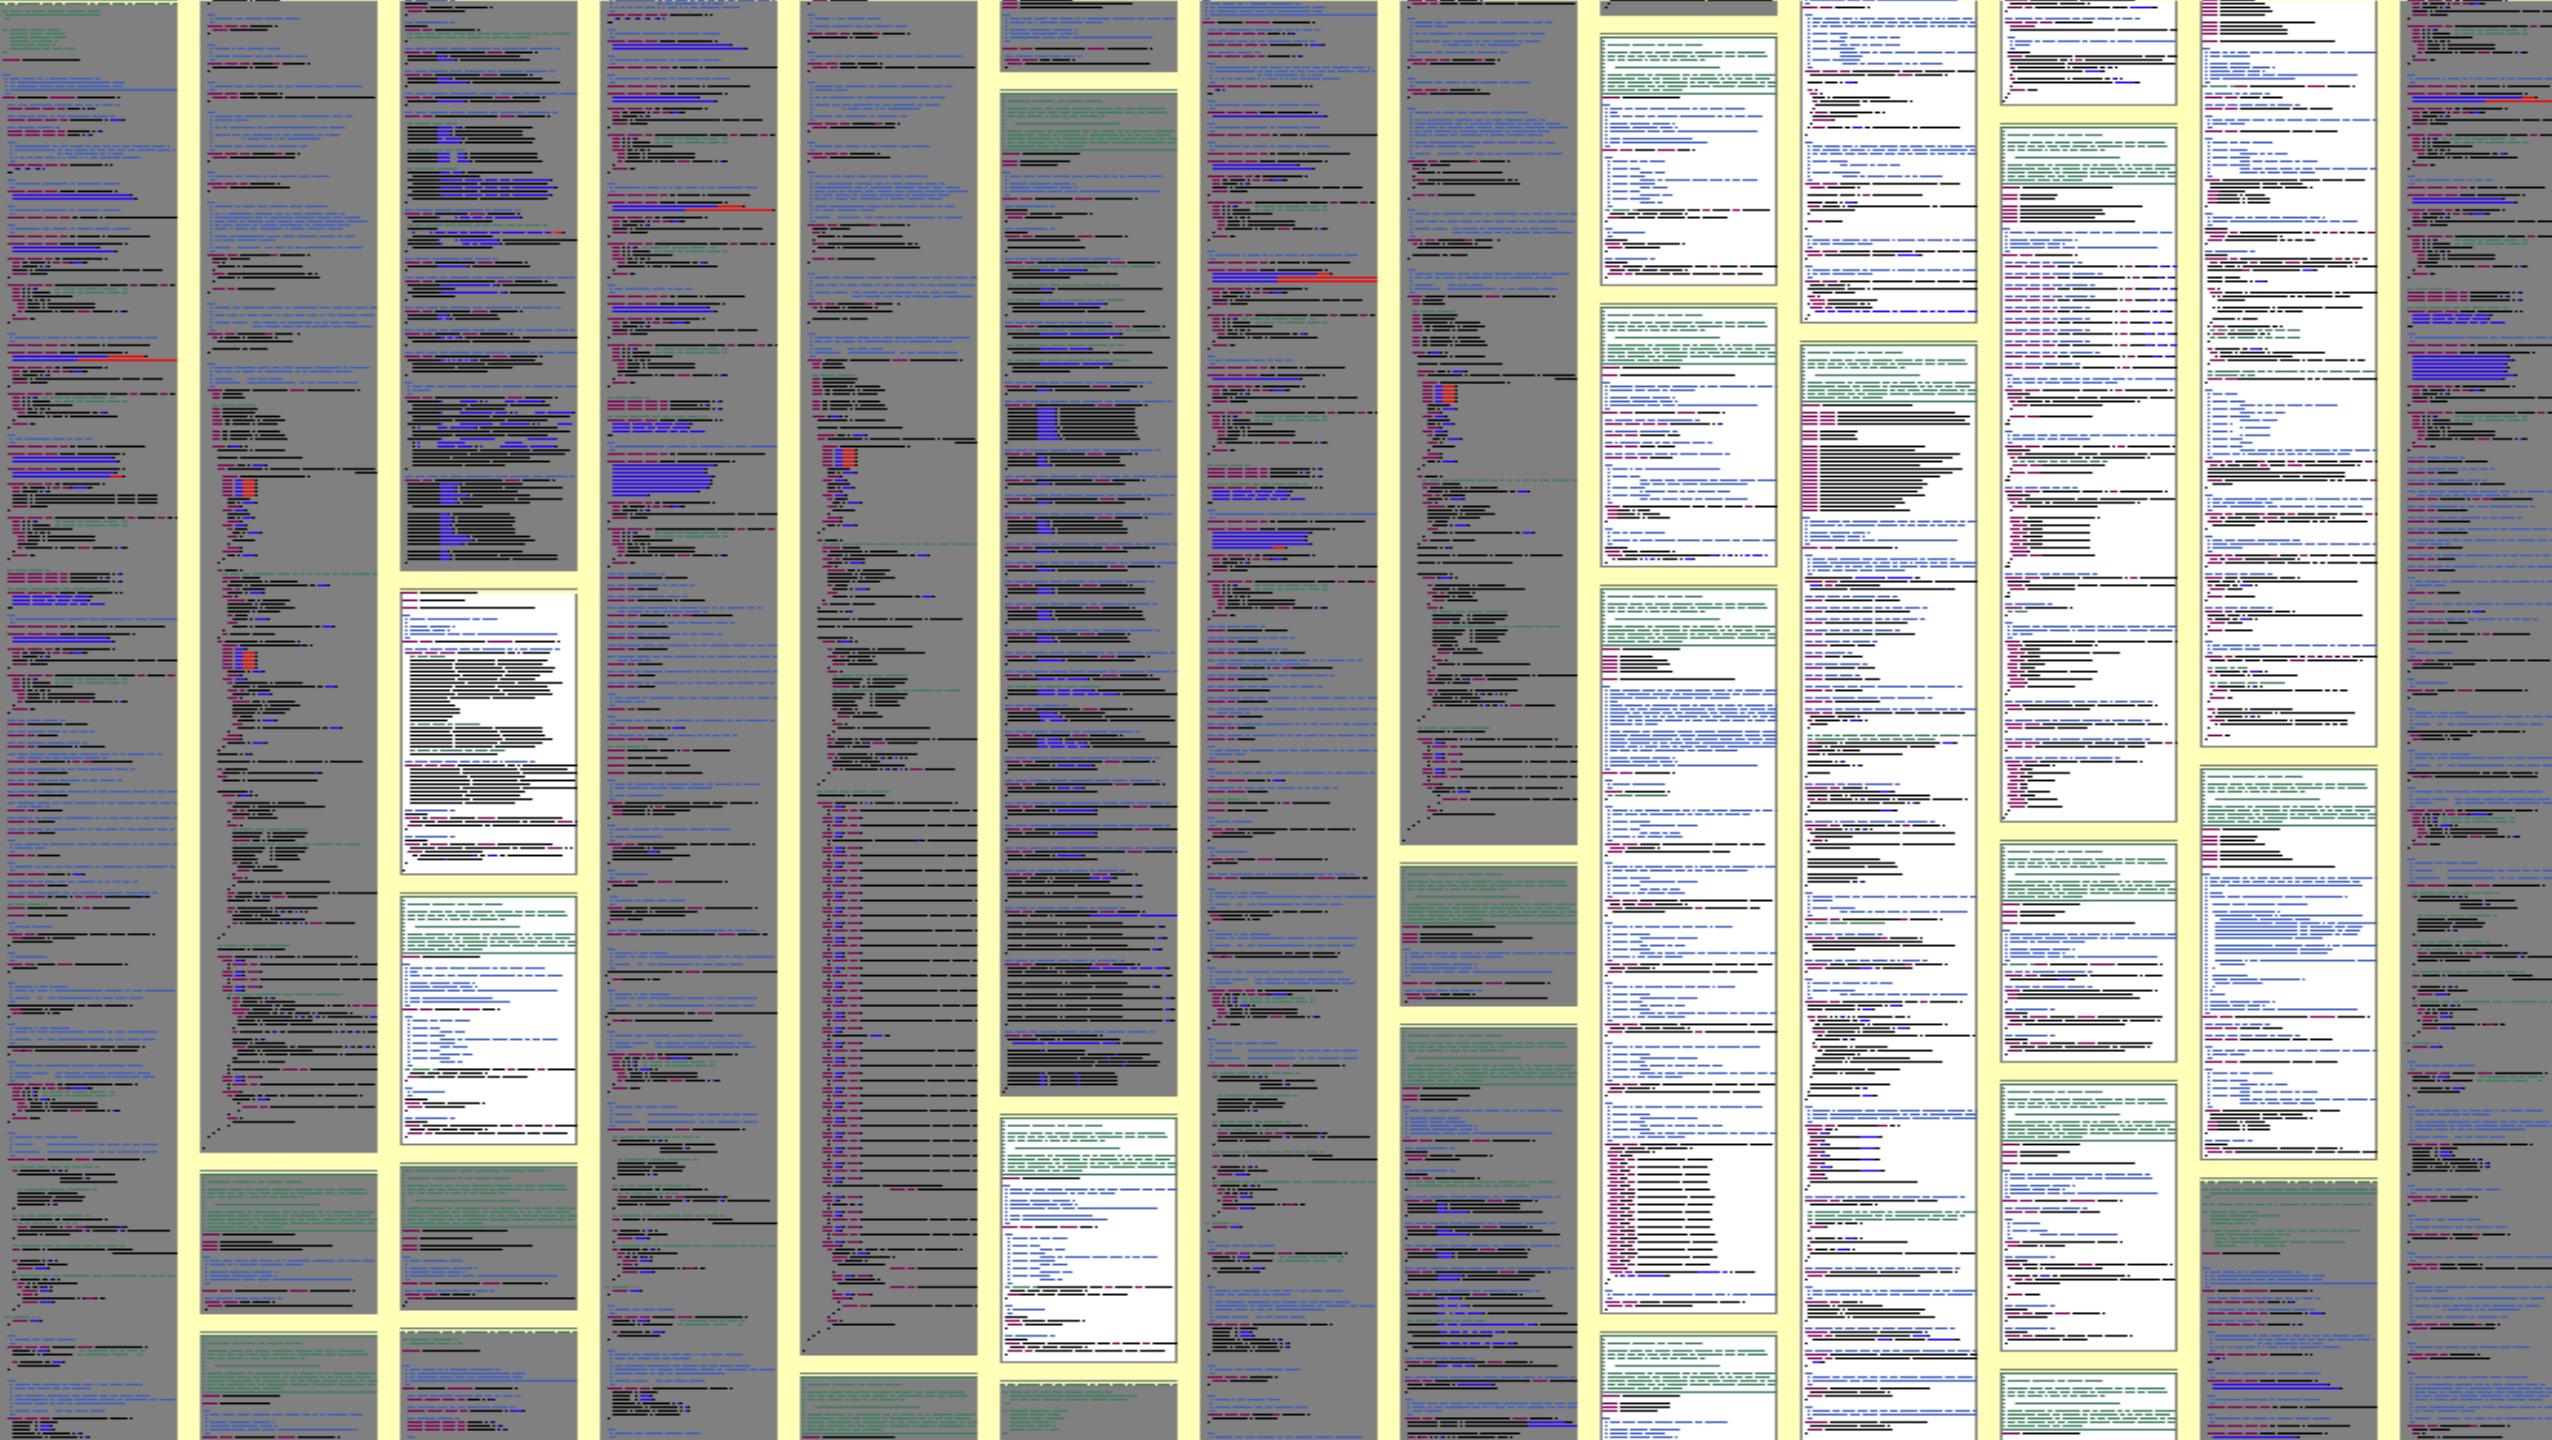

CQSE Workshop

Copy, Paste und dann ...?

Erfahrung aus 15 Jahren Clone-Detection und -Management



18. Oktober
10:30-12:00 Uhr
cqse.eu/clone-2311-oopst



Kontakt – Freue mich auf Diskussionen 😊



Dr. Elmar Jürgens · juergens@cqse.eu · +49 179 675 3863

CQSE GmbH
Lichtenbergstraße 8
85748 Garching bei München
www.cqse.eu

CQSE